

# TROVE™

Access & Power Integration

## Altronix/DMP 734/734N Wiegand Kits

### Models Include:

#### T1DMK3F4

4 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove1 enclosure with TDM1 Altronix/DMP backplane
- One (1) eFlow6NB - Power Supply/Charger
- One (1) VR6 - Voltage Regulator
- One (1) PDS8 - Dual Input Fused Power Distribution Module

#### T2DMK7F8

8 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove2 enclosure with TDM2 Altronix/DMP backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) ACM8 - Fused Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8 - Dual Input Fused Power Distribution Module

#### T2DMK75F16

16 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove2 enclosure with TDM2 Altronix/DMP backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) eFlow102NB - Power Supply/Charger
- Two (2) ACM8 - Fused Access Power Controllers
- Two (2) PD8UL - Fused Power Distribution Modules
- Two (2) BR1 - Mounting Brackets

#### T1DMK3F4D

4 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove1 enclosure with TDM1 Altronix/DMP backplane
- One (1) eFlow6NB - Power Supply/Charger
- One (1) VR6 - Voltage Regulator
- One (1) PDS8CB - Dual Input PTC Power Distribution Module

#### T2DMK7F8D

8 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove2 enclosure with TDM2 Altronix/DMP backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) ACM8CB - PTC Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8CB - Dual Input PTC Power Distribution Module

#### T2DMK75F16D

16 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove2 enclosure with TDM2 Altronix/DMP backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) eFlow102NB - Power Supply/Charger
- Two (2) ACM8CB - PTC Access Power Controllers
- Two (2) PD8ULCB - PTC Power Distribution Modules
- Two (2) BR1 - Mounting Brackets

All components of these Trove kits are UL Listed sub-assemblies.

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

## Installation Guide



All registered trademarks are property of their respective owners.

Rev. TDMK\_041725

Installing Company: \_\_\_\_\_ Service Rep. Name: \_\_\_\_\_

Address: \_\_\_\_\_ Phone #: \_\_\_\_\_



More than just power.™

## Overview:

Altronix Trove DMP kits are pre-assembled and consist of Trove enclosures/backplanes with factory installed Altronix power supply/chargers and sub-assemblies. They accommodate up to eight (8) DMP 734/734N Wiegand modules for up to sixteen (16) doors in a single enclosure.


## Configuration Chart:

Altronix Model Number	120VAC 60Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Maximum Supply Current for Main and Aux. Outputs on Power Supply board and ACM8(CB) Access Power Controllers' outputs	Nominal DC Output Voltage				Fail-Safe/Fail-Secure or Dry Form "C" Outputs	Additional Fused (PTC) Outputs	ACM8(CB) Board Input Fuse Rating	ACM8(CB) Board Output Fuse (PTC) Rating	PDS8(CB) Board Input Fuse (PTC) Rating	PDS8(CB) or PD8UL(CB) Board Output Fuse (PTC) Rating
					Power Supply 1		Power Supply 2							
					[DC]	[Aux]	[DC]	[Aux]						
					Output Range (VDC)	Output Range (VDC)	Output Range (VDC)	Output Range (VDC)						
T1DMK3F4	3.5	5A/250V	10A/32V	24VDC @ 6A					8			10A/32V	3A/32V	
T1DMK3F4D												9A	2.5A	
T2DMK7F8	4.5	6.3A/250V	15A/32V	24VDC @ 9.4A	20.17-26.4	20.28-26.4		8	8	10A/250V	3.5A/250V	10A/32V	3A/32V	
T2DMK7F8D											2.5A	9A	2.5A	
T2DMK75F16	8.0	eFlow104NB: 6.3A/250V	15A/32V	24VDC @ 9.4A				16	16	10A/250V	3.5A/250V		3.5A/250V	
T2DMK75F16D		eFlow102NB: 5A/250V									2.5A	2.5A		


## Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

- Remove backplane from enclosure. Do not discard hardware.
- Mark and predrill holes in the wall to line up with the top two/three keyholes in the enclosure. Install two/three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the two/three upper screws; level and secure. Mark the position of the lower three holes. Remove the enclosure. Drill the lower holes and install the three fasteners. Place the enclosure's upper keyholes over the two/three upper screws. Install the three lower screws and make sure to tighten all screws.
- Mount included UL Listed tamper switch (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure approximately 2" from the right side (*Fig. 1, pg. 2*). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.
- Connect unswitched AC power (120VAC 60Hz) to terminals marked [L, N]. Use 14 AWG or larger for all power connections. Secure green wire lead to earth ground. Green "AC" LED on power supply board will turn on. This light can be seen through the LED lens on the door of the enclosure.  
**Keep power-limited wiring separate from non power-limited wiring (120VAC 60Hz Input, Battery Wires). Minimum 0.25" spacing must be provided.**  
**CAUTION: Do not touch exposed metal parts.**  
**Shut branch circuit power before installing or servicing equipment.**  
**There are no user serviceable parts inside.**  
**Refer installation and servicing to qualified service personnel.**
- Measure voltage before connecting devices. This helps avoiding potential damage.
- Mount DMP 734/734N Wiegand modules to backplane, refer to *pages 3 - 5*.
- Refer to the *eFlow Power Supply/Charger Installation Guide* for eFlow6NB, eFlow102NB, eFlow104NB and corresponding *Sub-Assembly Installation Guides* for ACM8(CB), PDS8(CB), VR6 and PD8UL(CB) for further installation instructions.

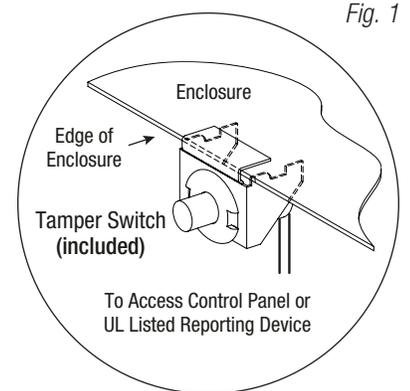

## Hardware:



## T1DMK3F4(D): Configuration of DMP 734/734N Wiegand Modules:

1. Fasten spacers (provided) to pems that match the hole pattern for DMP Wiegand Modules (Fig. 2, pg. 3).
2. Mount DMP 734/734N modules into the correct positions (Fig. 2, pg. 3):
  - a. Remove DMP 734/734N board from the plastic housing. Use the base part of the housing to mount onto TDM1 (Fig. 2a, 2b, pg. 3).
  - b. Secure the base of DMP 734/734N to the spacers using provided 5/16" pan head screws.
  - c. Make all necessary connections before reassembling DMP 734/734N Wiegand modules.
3. Fasten TDM1 backplane to Trove1 enclosure utilizing hardware (provided).

Fig. 2 - T1DMK3F4(D) Configuration

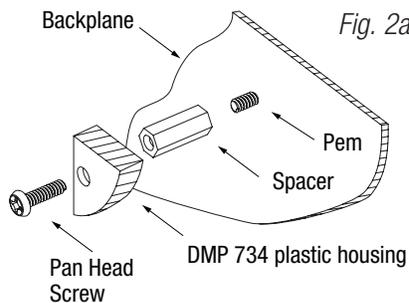
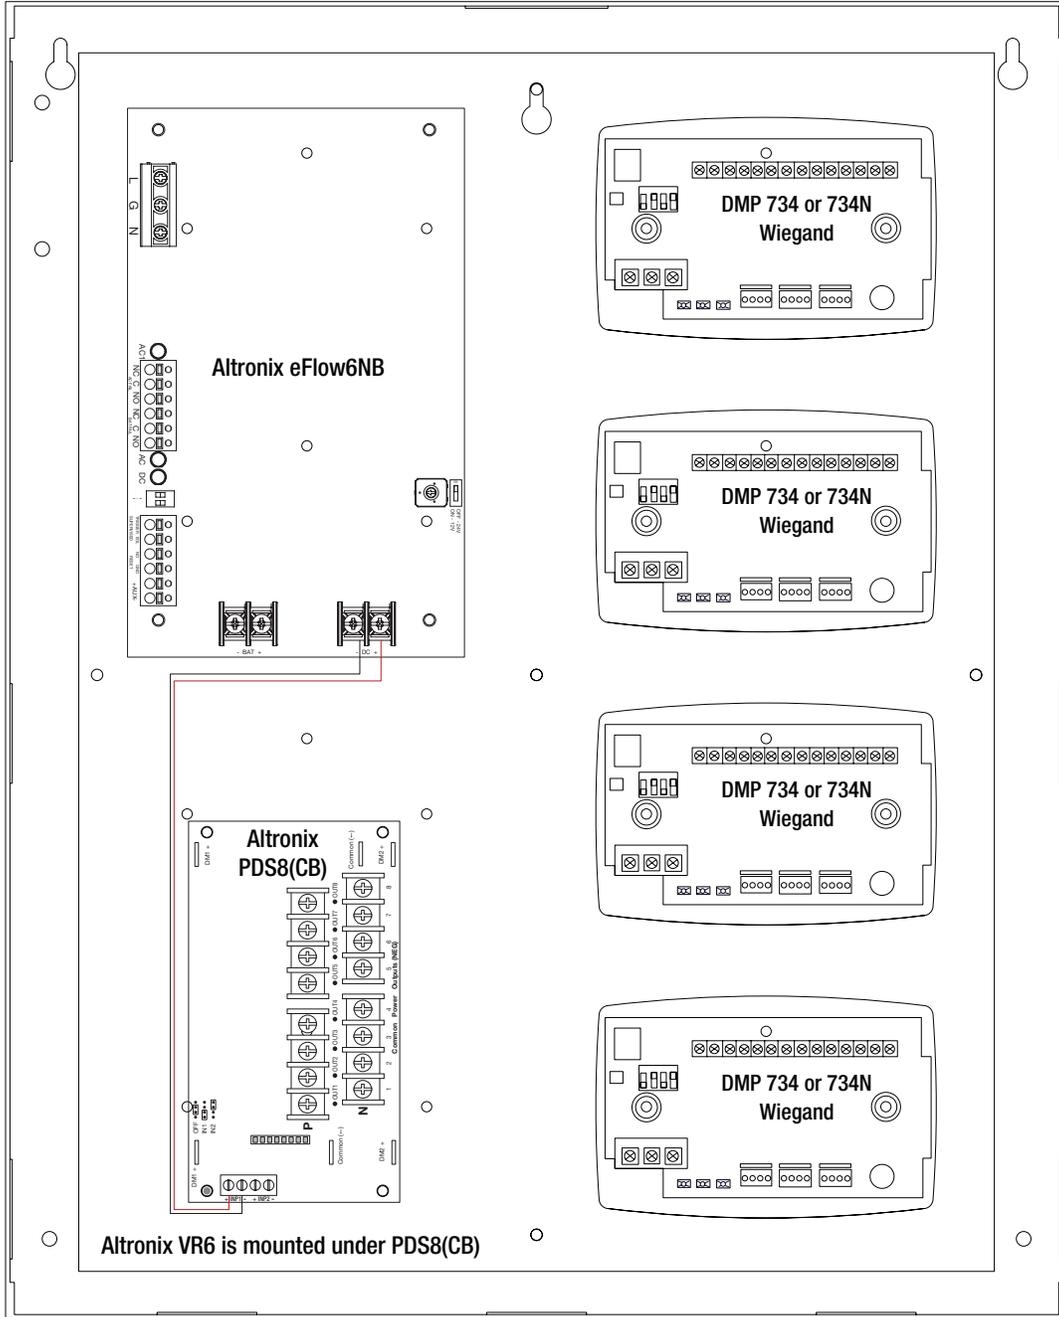


Fig. 2a

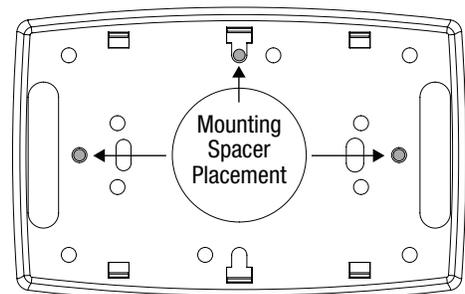


Fig. 2b

## T2DMK7F8(D): Configuration of DMP 734/734N Wiegand Modules:

1. Fasten spacers (provided) to pems that match the hole pattern for DMP 734/734N Wiegand Modules (Fig. 3, pg. 4).
2. Mount DMP 734/734N modules into the correct positions (Fig. 3, pg. 4):
  - a. Remove DMP 734/734N board from the plastic housing. Use the base part of the housing to mount onto TDM2 (Fig. 3a, 3b, pg. 4).
  - b. Secure the base of DMP 734/734N to the spacers using provided 5/16" pan head screws.
  - c. Make all necessary connections before reassembling DMP 734/734N Wiegand modules.
3. Fasten TDM2 backplane to Trove2 enclosure utilizing hardware (provided).

Fig. 3 - T2DMK7F8(D): Configuration

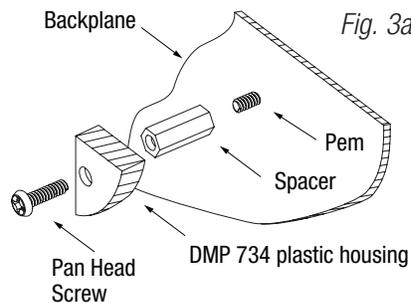
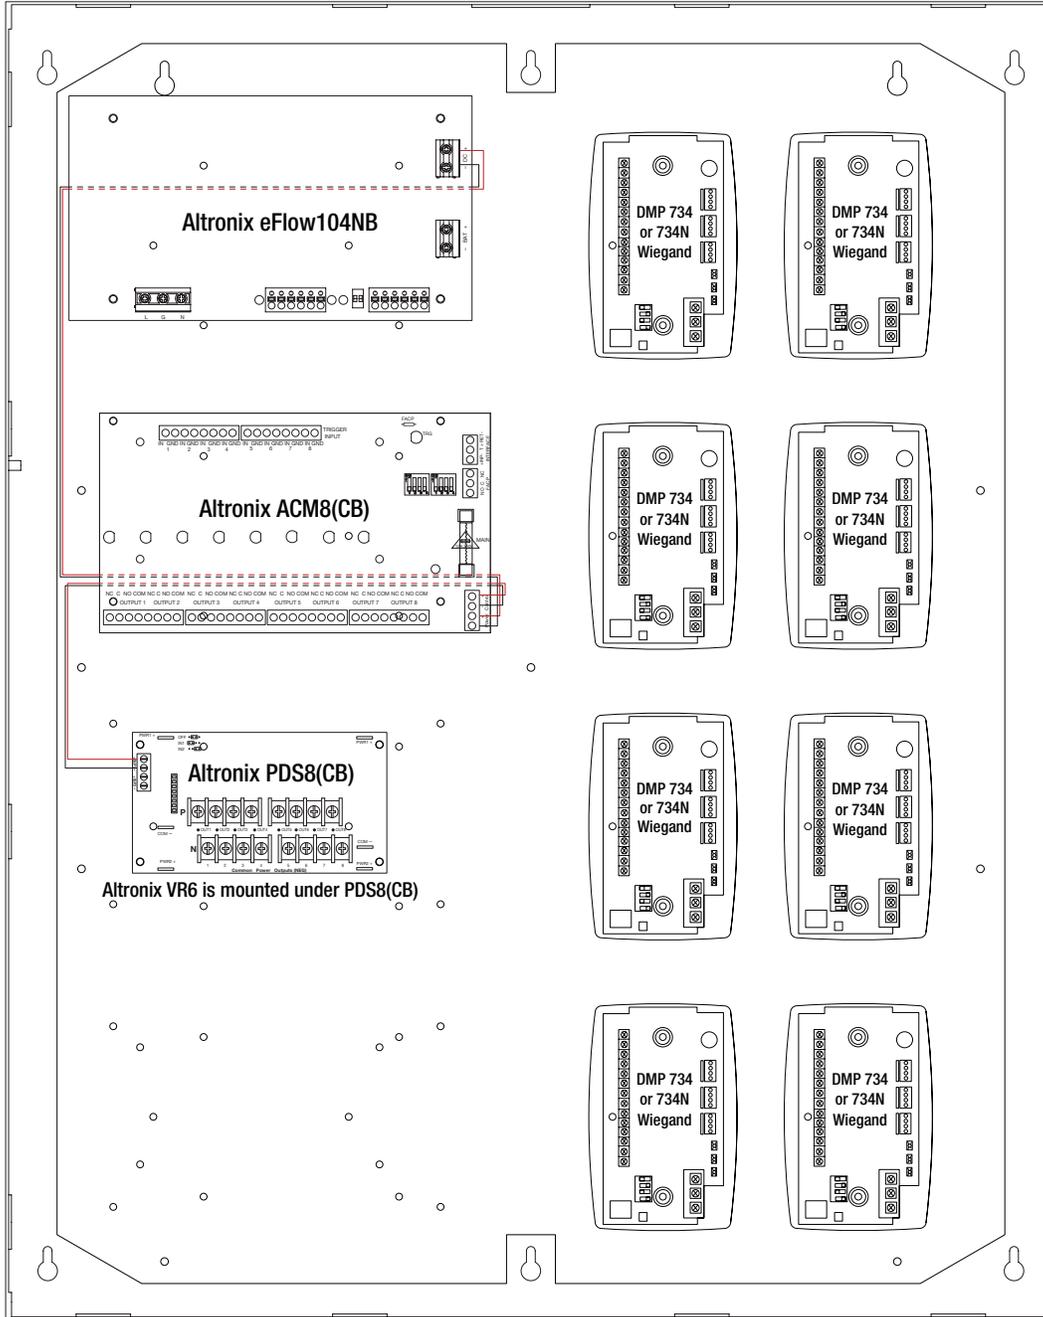


Fig. 3a


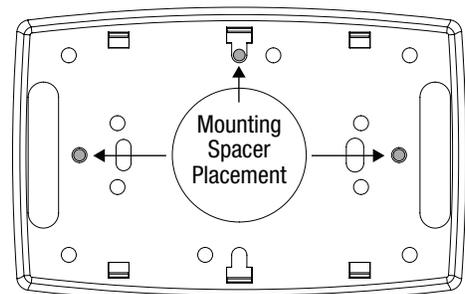


Fig. 3b

## T2DMK75F16(D): Configuration of DMP 734/734N Wiegand Modules:


1. Fasten spacers (provided) to pems that match the hole pattern for DMP 734/734N Wiegand Modules (Fig. 4, pg. 5).
2. Mount DMP 734/734N modules into the correct positions (Fig. 4, pg. 5):
  - a. Remove DMP 734/734N board from the plastic housing. Use the base part of the housing to mount onto TDM2 (Fig. 4a, 4b, pg. 5).
  - b. Secure the base of DMP 734/734N to the spacers using provided 5/16" pan head screws.
  - c. Make all necessary connections before reassembling DMP 734/734N Wiegand modules.
3. Fasten TDM2 backplane to Trove2 enclosure utilizing hardware (provided).

Fig. 4 - T2DMK75F16(D): Configuration

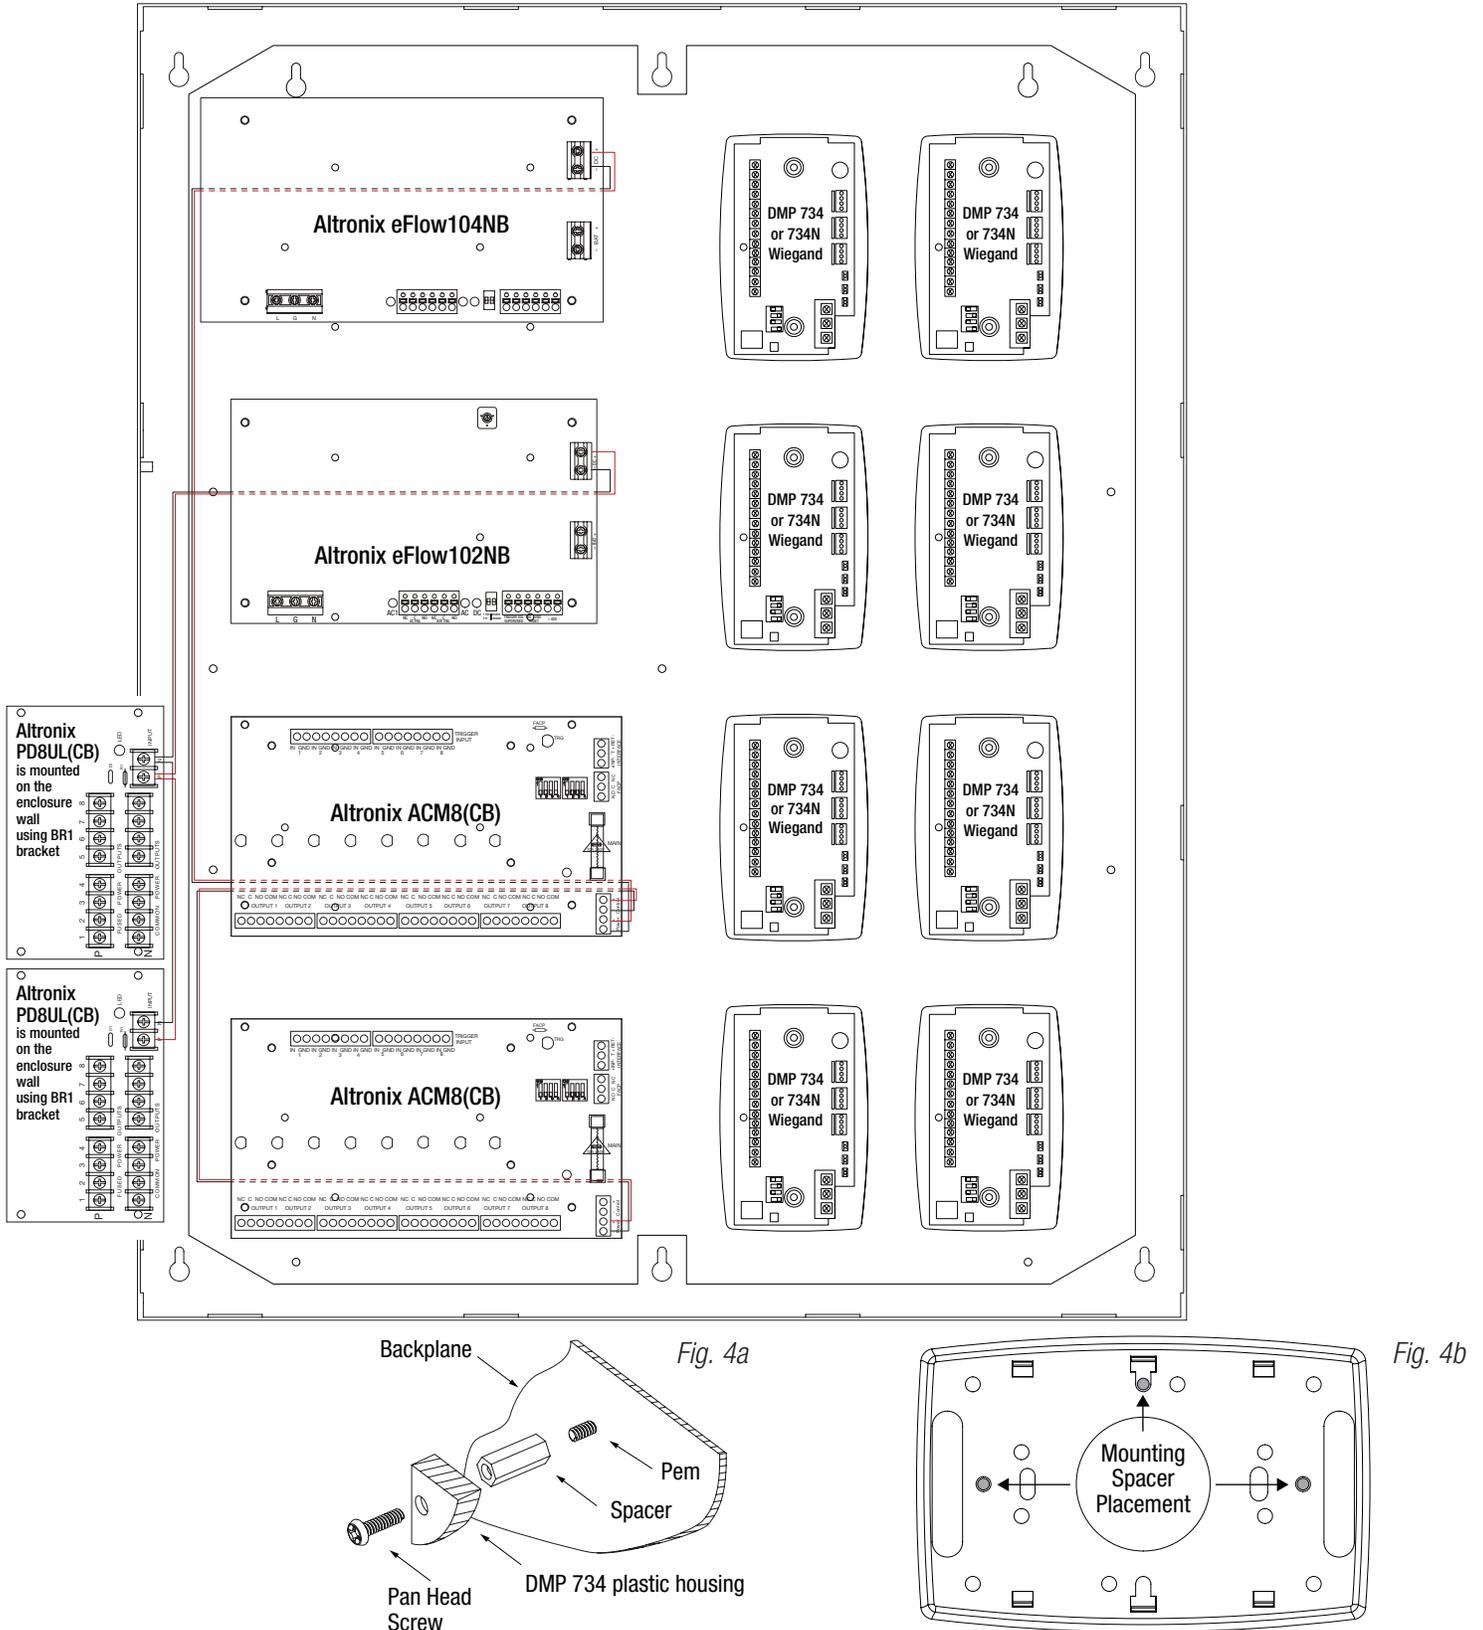



## eFlow Power Supply/Chargers can be Controlled and Monitored while Reporting Power/Diagnostics from Anywhere over the Network...

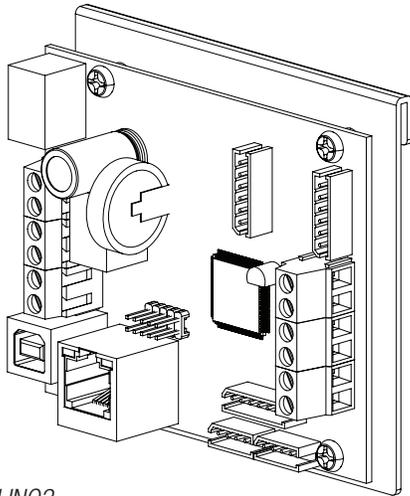

# LINQ™

### LINQ2 - Network Communication Module


LINQ2 provides remote IP access to real-time data from eFlow power supply/chargers to help keep systems up and running at optimal levels. It facilitates fast and easy installation and set-up, minimizes system downtime, and eliminates unnecessary service calls, which helps reduce Total Cost of Ownership (TCO) - as well as creating a new source of Recurring Monthly Revenue (RMR).

LINQ2

### Features:


- UL Listed in the U.S. and Canada.
- Local or remote control of up to (2) two Altronix eFlow power output(s) via LAN and/or WAN.
- Monitor real time diagnostics: DC output voltage, output current, AC & battery status/service, input trigger state change, output state change and unit temperature.
- Access control and user management: Restrict read/write, Restrict users to specific resources
- Two (2) integral network controlled Form "C" Relays.
- Three (3) programmable input triggers: Control relays and power supplies via external hardware sources.
- Email and Windows Dashboard notifications
- Event log tracks history.
- Secure Socket Layer (SSL).
- Programmable via USB or web browser - includes operating software and 6 ft. USB cable.

### LINQ2 Mounts Inside any Trove Enclosure

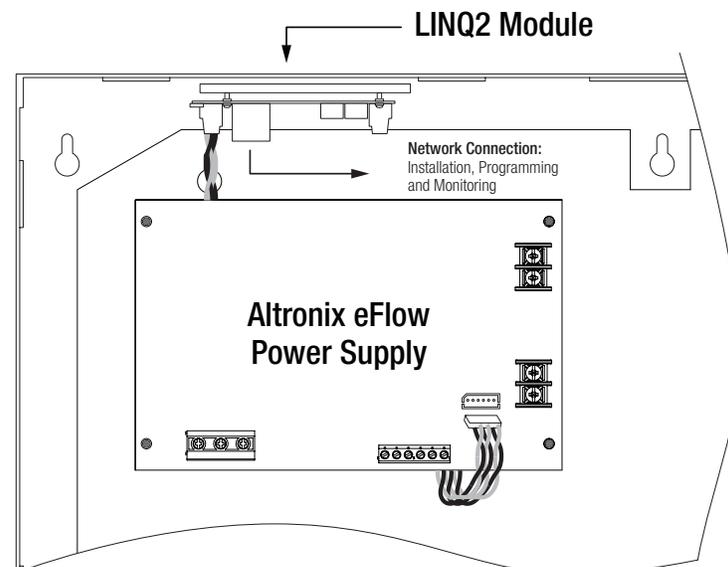


# T1DMK3F4(D) Enclosure Dimensions (H x W x D approximate):

18" x 14.5" x 4.625" (457mm x 368mm x 118mm)

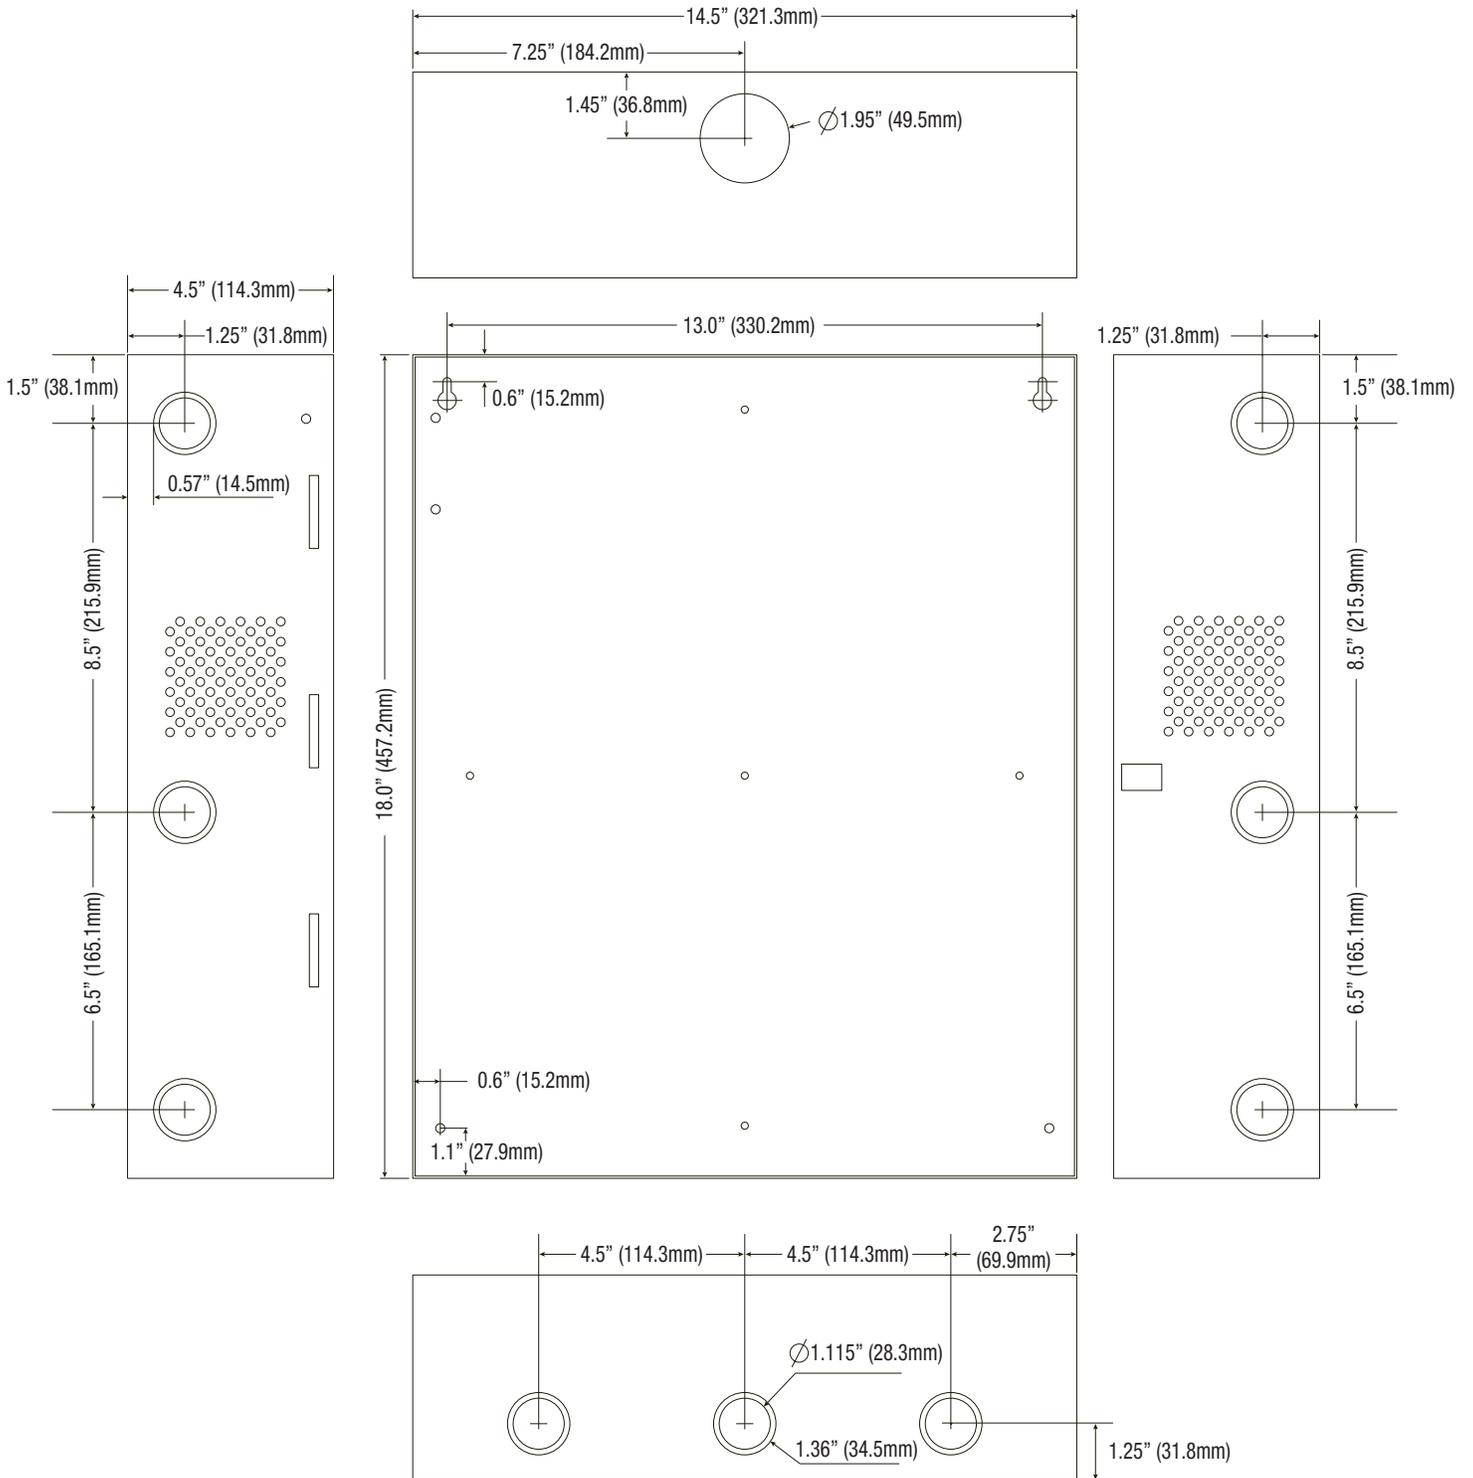

# T2DMK7F8(D) and T2DMK75F16(D) Enclosure Dimensions (H x W x D):

27.25" x 21.75" x 6.5" (692.2mm x 552.5mm x 165.1mm)

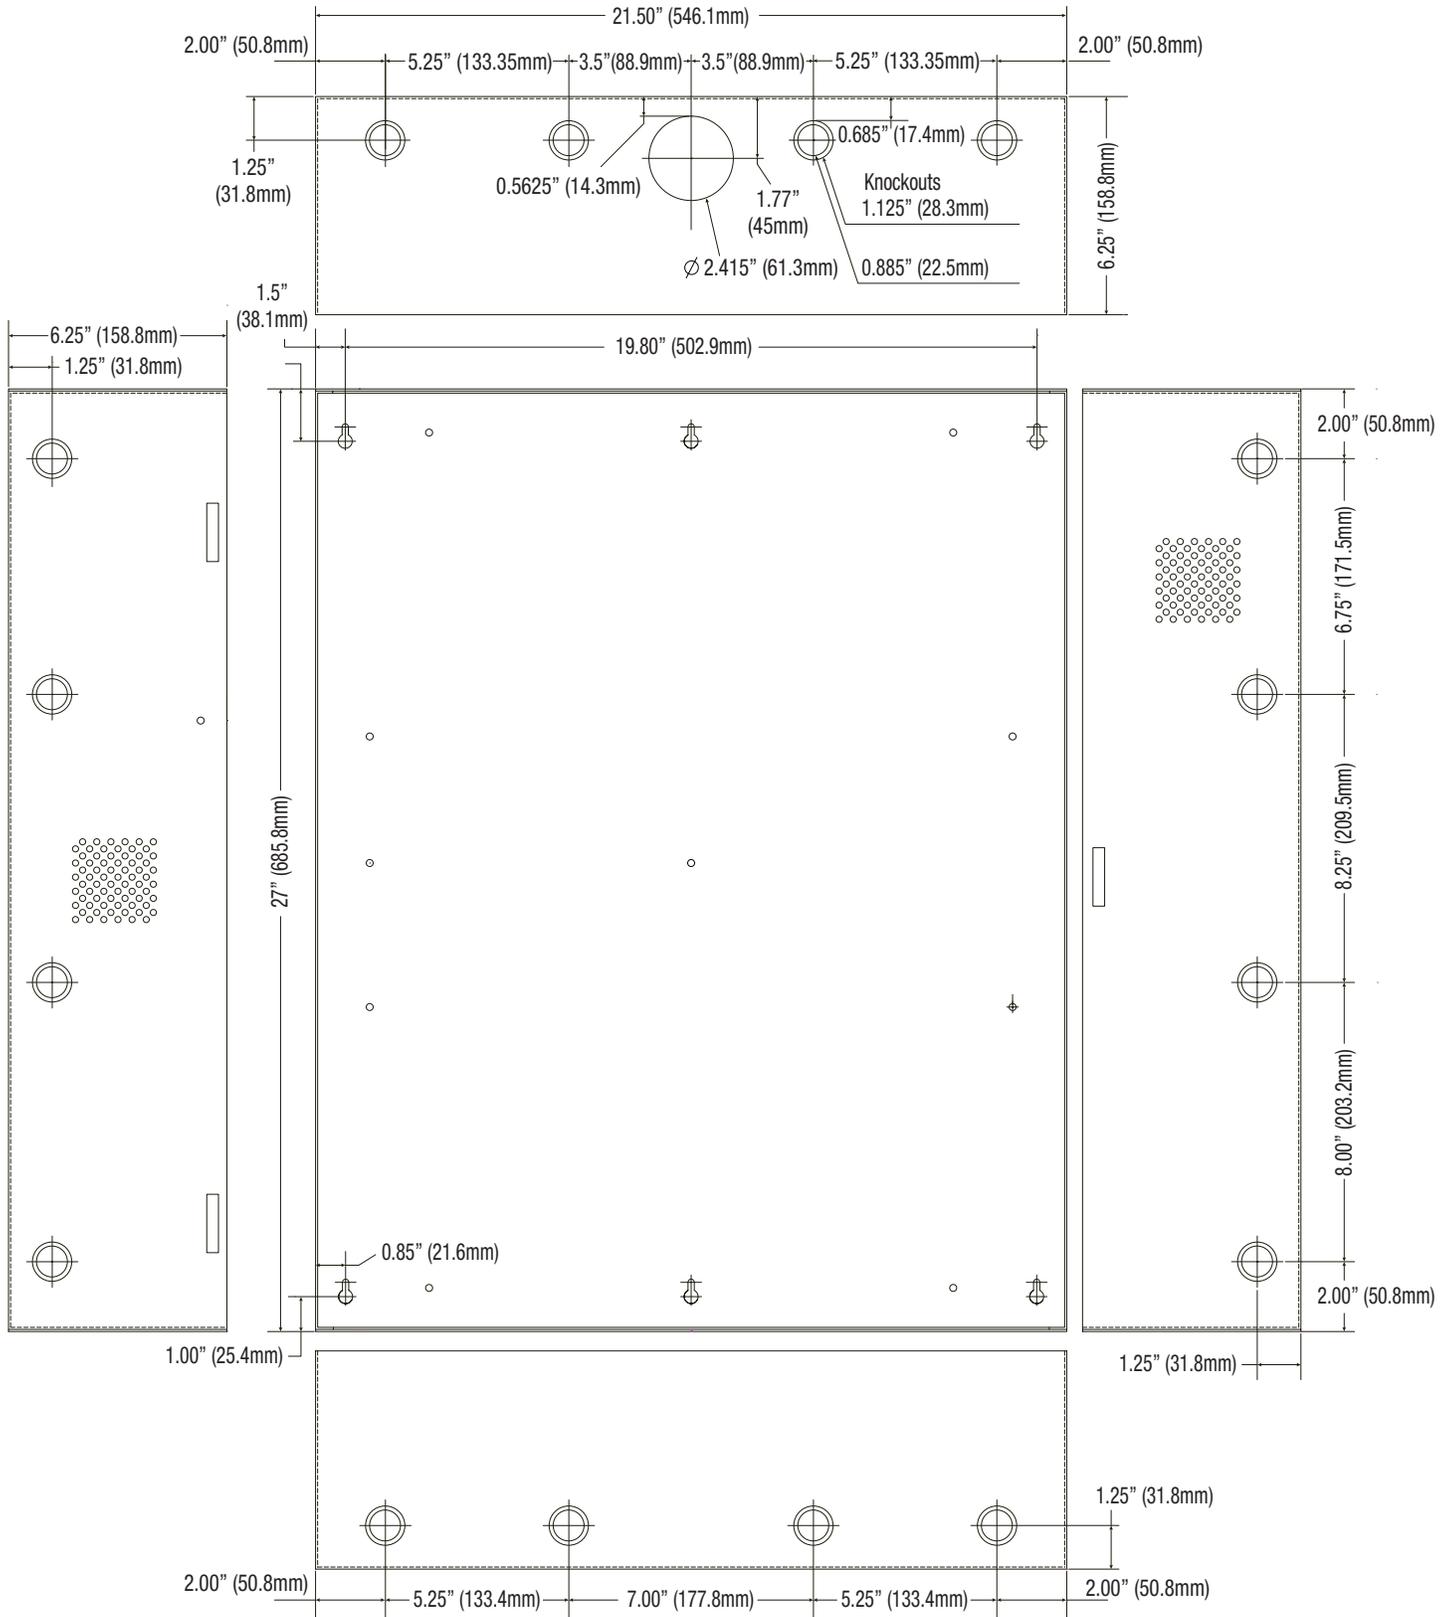

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056  
 website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty  
 IITrove DMP Kits

D17Y

