



Cylindrical Deadbolt Adjustment

Adjusting the back set from the 2 3/8" to 2 3/4"


1. Throw the bolt to the extended position by rotating the hub.

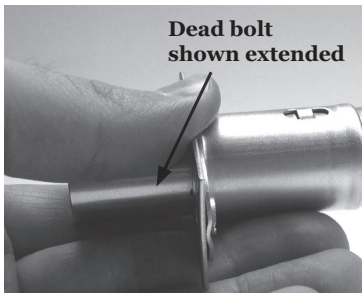


2. Hold both the dead bolt and the faceplate together, and then rotate the rear portion of the unit to disengage the notch.

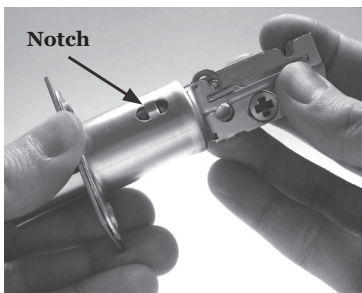


3. Pull apart to extend the mechanism approximately 3/8".

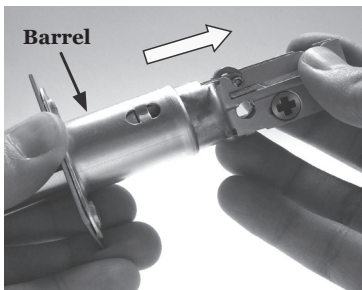

4. Rotate the barrel back to lock in the new backset.

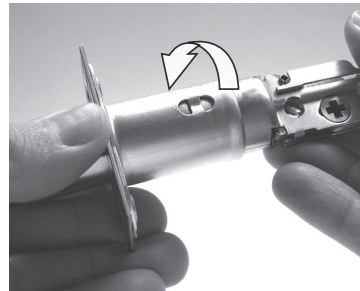

Note: To adjust from 2 3/4" back set to 2 3/8" back set, reverse this procedure.

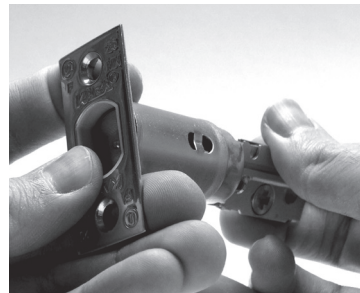

Troubleshooting

If the dead bolt overextends or retracts too far into the unit, the bolt will become misaligned with the hole. Rotate the barrel until the bolt lines up with the hole, and then extend or retract as needed.

Disclaimer: While reasonable efforts were made to ensure the accuracy of this document at the time of printing, Kaba assumes no liability for any errors or omissions. This information is subject to be revised without notice, and changes may be incorporated in future releases. © 2015 Kaba Access & Data Systems Americas. All rights reserved.

Kaba Access & Data Systems Americas
2941 Indiana Ave.
Winston-Salem NC 27105
USA
1-800-849-8324

www.kaba-adsamericas.com

LIT1093 1015