








ROSSLARE

Rosslare Secure Access Solutions

Global Product Catalog



Table of Contents

	Introduction	2
	Software	5
	Controllers	9
	Readers	19
	Biometric Terminals	39
	Credentials	45
	Accessories	51
	Guard Patrol	71
	Product Selection Guide	75

About Rosslare Group

For over four decades, Rosslare has been delivering state of the art electronics, achieving R&D excellence with breakthroughs such as the first digital battery analyzer and all-weather anti-vandal RFID readers.

Today, Rosslare is home for top industry talent specializing in access control solutions drawn on our rich global presence and implementation experience. Our tailored solutions, backed by one of the most extensive off-the-shelf product portfolios on the market, will continue to play a role in bringing value, performance and productivity to our industry leading clients worldwide.



ODM/OEM Services

Over the years, many of our market leading vendors have joined the growing family of Rosslare OEM/ODM service users, benefitting from our in-house capabilities coupled with unmatched service and support. ODM's can avoid the heavy direct labor, manufacturing and design costs, while enjoying highest quality, fully branded products. OEM's retain full control of design, while Rosslare handles all the manufacturing end to end.

Associations & Certifications

Rosslare's manufacturing processes meet leading international standards and requirements, including TUV Rhineland accreditation, ROHS compliance, and ISO quality standards, as well as ISO 9001, ISO14001 and ISO13485. Flexibly designed to meet the needs of a demanding global market, our products are made to pass certification tests with distinction, including but not limited to CE, FCC, UL, EAC, NOM and RCM.



Training & Support

Our global Technical Training and Support group provides pre-sales training and post-sales support services out of our Dallas, Europe, Buenos Aires, Hong Kong, Mumbai, and our Chinese facilities. The group takes pride in bringing a wealth of knowledge and expertise to your doorstep, with the explicit goal of helping you meet your technical challenges.

We provide both remote and in-house educational and support services, including on-site customer seminars, webinars, FAQ and live chat. Our professional teams of Engineers and Technicians are at your service 24/7, possessing all the technological skills and tools to help you and your customers succeed.



Industries

Rosslare serves a wide range of markets and industries, including Education, Healthcare, Residential & Commercial Real Estate, Corporate, Finance and more.

Applications

Our robust, field-proven software and hardware products are the foundation of our customers' organizational security, covering wide-ranging applications including Access Control, Parking Management, Time & Attendance, Clean Room Management and Guard Patrol.



ACCESS CONTROL



PARKING MANAGEMENT



TIME & ATTENDANCE



CLEAN ROOM MANAGEMENT



GUARD MANAGEMENT


Software



AxTraxNG client-server software management platform enables setting automated physical access control policy across facilities, perfect for today's most demanding users and organizations. The system can manage thousands of Rosslare networked access controllers and users, providing enhanced security with excellent system scalability and performance.



AxTraxNG™ Management Software

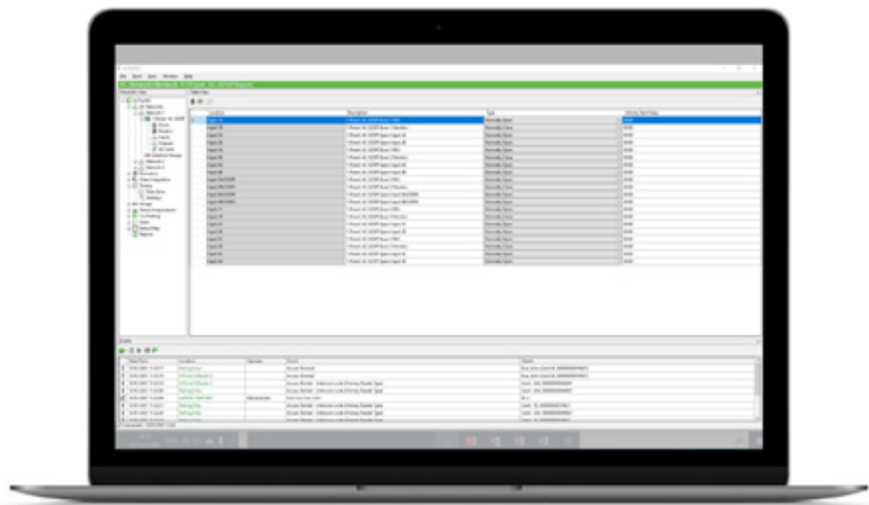

Video integration

Integrated with major NVR vendors, including Hikvision and Dahua, for event-based video pop-up and snapshot reports.

Integrated biometrics

Integrated with Rosslare fingerprint and face Biometric devices to enable improved facility security.

Access control policies

Enhanced access control policies such as access groups, interlock groups, Antipassback and more.

Identity management

Managing user information, photo, access credentials and related access policies, using new secure login process with dual-factor authentication dialog.

Up to 16 credentials per user

Supports Face-ID, Fingerprint, PIN-Codes, RFID cards, UHF Tags, NFC-ID, BLE-ID, and LPR for vehicles.

Alarm management and reporting

Alarm management workflow across devices and smart links automations, email notifications and reports module.

Software security

Client-server security mechanism including AES 128-bit encryption of database and client communications for a privacy compliant system.

Time and attendance

Built-in capability of generating attendance reports with pre-set formats, automatic and customized reports.

Car parking management

Enhanced by Rosslare long range readers, along with fundamental features related to parking occupancy management and control of multitenant environments.



AxTime™ Time & Attendance Client

- Produces reports from acquired data, such as usage reports, attendance records, visitors, and roll calls
- Password controlled for high level of security, uses the same permission rights of defined operator as AxTraxNG
- User-friendly software with intuitive GUI helps reduce the complexity of installation
- Supports overnight shifts




ViTrax™ VMS Solution

- Full video and audio management for third-party cameras
- Scheduled recording and backup management
- Multiple video viewport screens, can be arranged as desired
- Full event integration (inputs, alarms, and other system events) with AxTraxNG links
- Multi-lingual support, detailed authorization management, alarm and event handling, and more



Controllers



Networked Control Panels are Rosslare’s most advanced and secure access solutions, featuring 2, 4 and 6 reader models with a variety of expansions. Supporting online and offline operation, they easily scale up to multiple remote premises.

Standalone Controllers were designed for ease of installation, providing highly secure professional performance available in a variety of forms and configurations, including anti-vandal, all weather and tampering protection.

For small applications, our Entry-level Controllers can be locally configured and operated without a server, allowing single and dual door operation of up to 8 doors.



AC-825IP

Advanced Scalable Networked Access Platform

- Supports up to 6 doors (4 Wiegand and 2 OSDP readers)
- Expandable to 56 doors

KEY FEATURES

- Scalable and flexible – fits a wide range of applications
- Supports up to 100,000 users in off-line mode, unlimited server based capacity
- Onboard TCP/IP networking with AES 128-bit data encryption to an AxTraxNG server
- Bi-directional communication for enhanced data transmission speed and reliability
- 500,000 entries event history per controller
- One onboard expansion slot and supports up to 12 additional expansion boards via RSDP (R/S/D/P-805)
- Optional ME-1515 Secure Power Management Enclosure with illumination bar, tamper sensing, power status LED, and lockable C14 power plug

Expansion Boards



R-805

16 outputs



D-805

4-reader expansion



S-805

16 supervised inputs



P-805

16 supervised inputs and 8 outputs

Expand the range and functionality of the AC-825IP with a series of expansion boards, featuring DIN rail and enclosure mounting options

Controllers

Networked Control Panels



AC-215-B/215IP-B

Scalable Networked Controller

- Supports up to 2 doors
- Supports 2 readers



AC-225-B/225IP-B

Expandable Networked Access Controller

- Supports up to 2 doors
- Supports 2 readers
- Expandable to 4 doors using MD-D02B



AC-425-B/425IP-B

Expandable Networked Access Controller

- Supports up to 4 doors
- Supports 4 readers
- Expandable to 8 doors using MD-D04B

KEY FEATURES

- Networked up to 1023 panels
- Supports up to 30,000 users in off-line mode, unlimited server based capacity
- 20,000 event history entries per controller
- Multi-user authentication for high-level security
- Supports a wide range of Wiegand and PIN formats
- Optional ME-1015 Secure Power Management Enclosure with illumination bar, tamper sensing, power status LED, and lockable C14 power plug



Expansion Boards



MD-D02B

Optional On-board Expansion for AC-225-B

- 2 reader expansions



MD-D04B

Optional On-board Expansion for AC-425-B

- 4 reader expansions



MD-IO84B

Optional Expansion for AC-225-B, AC-425-B

- 8 inputs, 4 outputs

Controllers

Networked Control Panels

Enclosures



ME-1015

Secure Power Management Enclosure for the AC-215/225/425/IP-B



ME-1515

Secure Power Management Enclosure for the AC-825IP board or two R/S/D/P-805 expansions

AxTraxNG™ Platform – Turnkey Kits

Plug and play Access control platform kit with AxTraxNG™ pre-installed and pre-configured



MS825IPA-KCS

- AC-825IP
- 4 AY-K6255
- PC- Z64W with AxTraxNG pre-installed
- 50 proximity cards



MS225IP-KCS

- AC-225IPB
- 2 AY-K6255
- PC- Z64W with AxTraxNG pre-installed
- 25 proximity cards



PC-Z64W

Z64W Mini-PC WIN10 with AxTraxNG Server & Client

Controllers

Entry-Level



AC-115

Compact Networked Single Door Controller

- 2 Wiegand 26-Bit readers
- 3 programmable modes
- Built-in speaker for alarm notifications



AC-015

Single-Door, 2-Reader Standalone Controller & Software

- Lock relay - 5A
- Tamper output - 1A
- Multi-Lingual PC software to manage user details, events, and reports
- Alarm notifications

AC-115

KEY FEATURES

- Supports 2 Wiegand 26-Bit readers (In/Out)
- 3 programmable modes: Normal, Bypass, Secure
- 2400 users and up to 2000 events
- Supports setup, monitoring and DB management
- Time & Attendance with 8 programmable time zones and 24 holidays with reporting capabilities
- Networking: Up to 8 panels (8 doors) over RS-485 network
- Sounder and speaker for chime, door bell, and alarm event notifications
- 2 outputs: 5 A lock relay, 1 A auxiliary
- Supported by Lite management SW AS-115

Note: The keypad on the controller is for programming purposes only.

AC-015

KEY FEATURES

- Supports 2 Wiegand 26-Bit readers
- 3 programmable modes: Normal, Bypass, Secure
- 500 users, events
- 2 tri-colored LEDs
- Sounder and speaker for chime, and siren sounder
- Case tamper
- Input for REX button

- Supported by Lite management SW AS-015

Note: The keypad on the controller is for programming purposes only.



AC-020

2-Door, 2-Reader Standalone Controller

- 2 outputs: 5 A relay

Controllers

Standalone



AC-Q41HB/HP/SB

Anti-Vandal Backlit PIN & Heater Standalone Controller



AC-Q42HB/HP/SB

Anti-Vandal Backlit PIN & Proximity Standalone Controller



AC-Q44

Anti-Vandal Piezo PIN & Prox Standalone Controller

KEY FEATURES

- Standalone anti-vandal controller with 500 dual-code users memory
- 2 tri-colored LED indicators
- 3 user levels and 3 operation modes
- Optical case and back tamper protection
- Piezoelectric (selected models)
- Programmable blue backlit keypad (selected models)



AC-T43

Anti-Vandal Piezoelectric PIN Standalone Controller



AC-S43

Anti-Vandal Piezoelectric PIN Standalone Controller

Controllers

Standalone



AC-F43

Outdoor Backlit PIN
Standalone Controller



AC-F44

Outdoor Backlit PIN
& PROX Standalone
Controller



AC-G43

Outdoor Mullion Backlit
PIN Standalone Controller



AC-G44

Outdoor Mullion Backlit
PIN & Proximity Standalone
Controller



KEY FEATURES

- 500 dual-code users
- 2 x 2 A relays
- 2 inputs with user programmable logic
- 2 tri-colored LED indicators
- 3 user levels and 3 operation modes
- Optical case and back tamper protection
- Fully-potted, meets IP65
- Lockout feature on wrong entries (keypad/ card tamper)
- Bell, chime, siren, and strobe features available with BL-D40

Controllers

Standalone



AC-B32

Indoor PIN / Proximity &
PIN Standalone Controller



AC-D32

Indoor PIN / Proximity &
PIN Standalone Controller

KEY FEATURES

- 125 kHz, ASK type RFID proximity
- 3 user levels and 3 operation modes
- 2 tri-colored LED and buzzer indicators
- Bell, chime, siren, and strobe features available with BL-D40
- Case tamper
- Input for REX button
- 3.5 A lock relay



Networked Control Panels

Product	Type	Readers	Inputs/outputs	Interface	Max readers	Users	Event log	Operating Voltage (VDC)	Weight
AC-825IP*	Panel	6	12/6	TCPIP/OSDP/WIEGAND/RSDP	56	100K	500K	12	400 g (14.1 oz)
AC-215IPB	Panel	2	4/4	TCPIP/WIEGAND/RS485	2	30K	20K	12	0.36 kg (12.7 oz)
AC-225B/IPB	Panel	2	4/4	TCPIP/WIEGAND/RS485	4	30K	20K	12	0.36 kg (12.7 oz)
AC-425B/IPB	Panel	4	4/4	TCPIP/WIEGAND/RS485	8	30K	20K	12	0.36 kg (12.7 oz)
MD-D02B	Expansion	2	4/4		2			12	98.2 g (0.21 lb)
MD-D04B	Expansion	4	4/4		4			12	98.2 g (0.21 lb)
MD-IO84B	Expansion		8/4					12	98.2 g (0.21 lb)
R-805	Expansion		0/16	RSDP				12	230 g (8.1 oz)
S-805	Expansion		16/0	RSDP				12	150 g (5.3 oz)
D-805	Expansion	4	8/4	RSDP	4			12	150 g (5.3 oz)
P-805	Expansion		16/8	RSDP				12	200 g (7.1 oz)
ME-1515	Enclosure								4.6 kg (10.1 lb)
ME-1015	Enclosure								3.4 kg (7.5 lb)

* Encryption AES128

Small Access Controllers

Product	Frequency	Technology	Interface	Read Distance	Standalone 500 users	Tamper Output (Open collector)	IP Rating	Operating Voltage (VDC)	Weight
AC-115			RS-485		2400*	✓		12–24	220 g (0.5 lb)
AC-020			Wiegand		500*	✓		12–24	220 g (0.5 lb)
AC-015			Wiegand		500*	✓		12–24	220 g (0.5 lb)
AC-Q41HB		PIN	Auxiliary		✓	✓	IP54	12–24	440 g (1.0 lb)
AC-Q41SB		PIN	Auxiliary		✓	✓	IP65	12–24	521 g (1.2 lb)
AC-Q42HB	125 KHz	PIN, Prox	Auxiliary	65 mm (2.5 in.)	✓	✓	IP54	12–24	440 g (1.0 lb)
AC-Q42SB	125 KHz	PIN, Prox	Auxiliary	65 mm (2.5 in.)	✓	✓	IP65	12–24	521 g (1.2 lb)
AC-Q44	125 KHz	PIN, Prox	Auxiliary	65 mm (2.5 in.)	✓	✓	IP65	12–24	521 g (1.2 lb)
AC-S43		PIN	Auxiliary		✓	✓	IP65	12–24	413 g (14.6 oz)
AC-T43		PIN	Auxiliary		✓	✓	IP65	12–24	388 g (13.7 oz)
AC-G43		PIN	Auxiliary		✓	✓	IP65	12–24	178 g (6.3 oz)
AC-G44	125 KHz	PIN, Prox	Auxiliary	80 mm (3.2 in.)	✓	✓	IP65	12–24	178 g (6.3 oz)
AC-F43		PIN	Auxiliary		✓	✓	IP65	12–24	244 g (8.6 oz)
AC-F44	125 KHz	PIN, Prox	Auxiliary	75 mm (3.0 in.)	✓	✓	IP65	12–24	244 g (8.6 oz)
AC-B32	125 KHz	PIN, Prox	Wiegand	90 mm (3.5 in.)	✓	✓		12–16	124 g (4.4 oz)
AC-D32	125 KHz	PIN, Prox	Wiegand	90 mm (3.5 in.)	✓	✓		12–16	115 g (4.1 oz)

*Requires external reader



Readers



Readers

13.56 MHz – Open to Secure® – O2S®

Rosslare readers are known for their reliability, high performance and attractive design. Placed in protected or unprotected areas, readers deliver credentials to the controller located at a secure location. With a broad selection to choose from, our readers are designed to fit the current and future architectural, technical and environmental needs of any organization.



**AY-H6270B/
AY-H6280B**

MIFARE® Classic and
MIFARE Plus®/DESFire®
EV1 Reader



**AY-H6370B/
AY-H6380B**

MIFARE® Classic and
MIFARE Plus®/DESFire®
EV1 Reader with Keypad



**AY-G6270B/
AY-G6280B**

MIFARE® Classic and
MIFARE Plus®/DESFire®
EV1 Reader



**AY-G6370B/
AY-G6380B**

MIFARE® Classic and
MIFARE Plus®/DESFire®
EV1 Reader with Keypad

KEY FEATURES

- Supports Rosslare MIFARE Classic Sector
- High security with AES 128-bit, compatible with MIFARE Plus and MIFARE DESFire EV1
- CSN reading with MIFARE Classic EV1
- Supports SIA OSDP
- Tri-colored LED operation and buzzer



DR-6280

MIFARE® CLASSIC
and DESFire EV1
Desktop Enrollment
Reader

DR-6280

KEY FEATURES

- Compatible with Rosslare AxTrax management system
- USB connectivity to PC
- Bi-colored LED for status notification
- Supported credentials: MIFARE Classic EV1 and MIFARE DESFire EV1

Readers

13.56 MHz – CSN SMART™



AY-H6255BT

CSN SMART™ Smart Card Reader with NFC and BLE-ID™



AY-H6355BT

CSN SMART™ Smart Card Reader with Keypad, NFC and BLE-ID™

KEY FEATURES

- Supports Rosslare BLE-ID and reads most 13.56 MHz contactless credentials
- Configurable using BLE-Admin mobile app
- Eight keypad transmission formats are available
- Addressable OSDP connectivity, up to 32 addresses using DIP switches
- Optional desktop reader enrollment station DR-U955BT



Rosslare Mobile Apps



Rosslare BLE-Admin™ Configuration App

Available for iOS and Android



Rosslare BLE-ID™ Mobile Credentials App

Available for iOS (Bluetooth) and Android (Bluetooth & NFC)

Readers

13.56 MHz – CSN SELECT™



AY-M6255
Smart Card Reader



AY-K6255
Smart Card Reader



AY-H6255
Smart Card Reader



AY-L6255
Smart Card Reader

KEY FEATURES

- Reads most 13.56 MHz contactless credentials
- NFC-ID support using Rosslare BLE-ID mobile app
- Support SIA OSDP in AY-M/H6255 models
- Fully configurable using configuration card (requires CS-CCT Configuration Card Tool)



AY-R6255
Illuminated Smart Card Reader



AY-Q6255
Smart Card Anti-Vandal Reader

Readers

13.56 MHz – CSN SELECT™



AYC-M6355

Convertible Smart Card Reader with Keypad



AYC-H6355

Convertible Smart Card Reader with Keypad



AYC-Q6355

Convertible Anti vandal Smart Card Reader with Keypad

KEY FEATURES

- Reads most 13.56 MHz contactless credentials
- NFC-ID support using Rosslares BLE-ID mobile app
- Support SIA OSDP in AYC-M/H6355 models
- Fully configurable using configuration card (requires CS-CCT Configuration Card Tool)



DR-6255

Configuration Card Programmer and 13.56 MHz Smartcard CSN Desktop Enrollment Reader

DR-6255

KEY FEATURES

- Compatible with Rosslare AxTrax management system
- USB connectivity to PC
- Bi-colored LED for status notification
- Configuration card programmer
- Supported credentials: 13.56 MHz Smartcard CSN (ISO14443A/B, ISO15693, ISO18092 and more)

Rosslare Mobile Apps



Rosslare BLE-ID™ Mobile Credentials App

Available for iOS (Bluetooth)
and Android (Bluetooth & NFC)



Readers

13.56 MHz – MIFARE® Classic CSN



AY-M5B

MIFARE Classic® EV1
Contactless Smart Card
Reader



AY-H5B

MIFARE Classic® EV1
Contactless Smart Card
Reader



AY-L5B

MIFARE Classic® EV1
Contactless Smart Card
Mullion Reader



AY-K5B

MIFARE Classic® EV1
Contactless Smart Card
Micro-Mullion Reader

KEY FEATURES

- 13.56 MHz MIFARE® CLASSIC EV1
- Wiegand 26-Bit to 40-Bit
- For indoor installation



AY-T6350

Touch Keypad Reader
with RFID

AY-T6350

KEY FEATURES

- 13.56 MHz MIFARE RFID
- Wiegand 26-Bit to 54-Bit
- IP68 – a fully potted housing with top cover for all weather applications

Readers

13.56 MHz – MIFARE® Classic CSN



AY-M25B
MIFARE® Classic
Contactless Smart Card
Reader



AY-H25B
MIFARE® Classic
Contactless Smart Card
Reader



AY-L25B
MIFARE® Classic
Contactless Smart Card
Mullion Reader



AY-K25B
MIFARE® Classic
Contactless Smart Card
Micro-Mullion Reader

KEY FEATURES

- 13.56 MHz MIFARE® CLASSIC EV1
- Wiegand 26-Bit to 40-Bit
- For outdoor installation



Readers

13.56 MHz – MIFARE® Sector



AY-M26

MIFARE® Contactless Smart Card Sector Reader

AY-M26

KEY FEATURES

- 13.56 MHz MIFARE® CLASSIC EV1
- Full sector reading support
- Programmable multi-format output
- Epoxy-potted – meets IP65, waterproof
- Optical back tamper



AY-W6260

MIFARE® Contactless Smart Card Sector Reader



AY-W6360

MIFARE® Contactless Smart Card Sector Reader with Keypad



AY-Q6260

Anti-Vandal MIFARE® Contactless Smart Card Sector Reader



AY-Q6360

Anti-Vandal MIFARE® Contactless Smart Card Sector Reader with Keypad

- Blue backlight keypad
- Two tri-colored LEDs and buzzer indicators

Readers

125 kHz – PROX and goPROX®



AY-K12C
Micro-Mullion
Proximity Reader



AY-L12C
Mullion Proximity
Reader



AY-H12C
Proximity Reader



AY-M12C
Proximity Reader



AY-Q12C
Anti-Vandal
Proximity Reader

KEY FEATURES

- Reads 125 kHz RFID
- Wiegand 26-Bit, Clock & Data, RS-232 (other Wiegand formats available per request)
- Tri-colored LED
- 2 x LED color control inputs
- Hold control input



Readers

125 kHz – PROX and goPROX®



AYC-G60

Mullion goPROX® & PIN
Convertible Reader/
Controller



AYC-G64

Mullion PIN Convertible
Reader/Controller



AYC-F60

goPROX® & PIN
Convertible Reader/
Controller



AYC-F64

PIN Convertible Reader/
Controller

KEY FEATURES

- Convertible to standalone controller using PS-C25TB Power Management Enclosure or the MD-25TB Secure Relay I/O Module
- Multi-format keypad
- Reads all HID Prox credentials (125 kHz FSK) using Genuine HID Technology™ (AYC-G60, AYC-F60)
- Programmable patented backlit keypad

Readers

125 kHz – PROX and goPROX®



AY-M2B
EM Contactless
Reader



AY-H2B
EM Contactless
Reader



AY-L2B
EM Contactless
Reader



AY-K2B
EM Contactless
Reader



KEY FEATURES

- 125KHz EM Compatible
- Wiegand 26-Bit
- For indoor installation

Readers

125 kHz – PROX and goPROX®



AYC-E65B/BG/BB

Convertible Ultra-Slim
PIN/Proximity Reader/
Controller



AYC-E60N/B

Convertible Ultra-Slim
Mullion goPROX® & PIN
Reader



GO PROX
BY HID PROX



AYC-T65N/B

Convertible Ultra-Slim
Proximity & PIN Reader



AYC-E65B / AYC-E60 / AYC-T65

KEY FEATURES

- Ultra-slim flush mount design
- Built-in piezoelectric keypad for PIN code entry
- Programmable patented blue backlit keypad
- Reads all HID Prox credentials (125 kHz FSK) using Genuine HID Technology™ (AYC-E60)



AYC-Q64B

Convertible Anti-Vandal
Proximity & PIN Reader/
Controller



AYC-Q60

Convertible Anti-Vandal
Backlit goPROX® & PIN
Reader

GO PROX
BY HID PROX

AYC-Q64B / AYC-Q60

KEY FEATURES

- Convertible to standalone controller using PS-C25TB Power Management Enclosure or the MD-25TB Secure Relay I/O Module
- Programmable patented blue backlit keypad on selected models
- Reads all HID Prox credentials (125 kHz FSK) using Genuine HID Technology™ (AYC-Q60)

Readers

125 kHz – PROX and goPROX®



AY-V12B
Medium-Range
Proximity Reader



AY-V64B
Medium-Range Backlit
Proximity & PIN Reader



AY-Z12A
Long-Range
Proximity Reader

AY-V12B / AY-V64B / AY-Z12A KEY FEATURES

- Long range RFID transmission
- Wiegand 26-bit and clock and data
- Bi-colored LED and buzzer indicators
- AY-V64B: Multi-format keypad transmission and red backlight keypad



MD-12C/W
OEM Proximity Reader
Modules

MD-12C/W KEY FEATURES

- 125 kHz ASK, EM RFID Proximity Reader Module
- Read range of 5 cm (2 in.)
- Input voltage: 5 VDC
- Tiny footprint – 22 mm (0.43 in.) in diameter
- Available in Wiegand 26-Bit (MD-12W) and Rosslare format Clock & Data (MD-12C)



DR-12C
EM and Temic Card
Desktop Enrollment
Reader

DR-12C KEY FEATURES

- Compatible with Rosslare AxTrax management system
- USB connectivity to PC
- Bi-colored LED for status notification
- Supported credentials: EM, TEMIC cards

Readers

PIN Code



AYC-G54

Convertible Backlit PIN Reader/Controller



AYC-F54

Convertible Backlit PIN Reader/Controller



AYC-E55

Ultra-Slim Piezo PIN Reader/Controller



AYC-Q54B

Convertible Anti-Vandal Backlit PIN Reader/Controller



AY-T55

Anti-Vandal Piezoelectric PIN Reader



AY-S55

Anti-Vandal Piezoelectric PIN Reader



AY-D09M

Indoor Multi-Format PIN Reader

KEY FEATURES

- Sophisticated PIN convertible reader / controller (selected models)
- Supports 4-to-8-digit PIN credentials
- Outputs common PIN formats
- Smooth, attractive design, with all-weather indoor and outdoor operation
- 2 tri-colored LEDs and an integral sounder for programming and operation
- User friendly menu, based on large visible keypad, LED and sounder indicators
- Convertible to standalone controller using PS-C25TB Power Management Enclosure or the MD-25TB Secure Relay I/O Module (selected models)
- Buzzer indicator
- Back Optical tamper detection output

*Features vary per model

Readers

UHF Long Range



AY-U915BT

Long range UHF



AY-U920BT

Extended long-range UHF

AY-U915BT/ AY-U920BT

KEY FEATURES

- AY-U920BT Read range up to 12 m (39 ft) – UHF and Bluetooth
- AY-U915BT Read range up to 12 m (39 ft) – Bluetooth, and 6 m (19 ft) – UHF
- Supports UHF-RFID and BLE-ID™ (Android and iOS) credentials
- Single and multi-credential modes
- Built from robust materials, supports IP65 rating
- Readers and credentials can be factory-customized to allow only recognized credentials to pass to the controller
- Rosslare BLE-Admin™ mobile application for fast deployment, simple configuration of LED and buzzer behaviour, Wiegand format, OSDP address, secure channel key, firmware upgrade over the air



DR-U955BT

Multi-technology Desktop Enrollment Reader with Bluetooth support

DR-U955BT

KEY FEATURES

- Compatible with Rosslare AxTrax management system
- USB connectivity to PC
- Bi-colored LED for status notification
- Supported credentials: 13.56 MHz Smartcard CSN, Rosslare BLE-ID™ and UHF RFID

Rosslare Mobile Apps



Rosslare BLE-Admin™ Configuration App

Available for iOS and Android



Rosslare BLE-ID™ Mobile Credentials App

Available for iOS (Bluetooth) and Android (Bluetooth & NFC)



AY-L23

Extra Long-Range RF Reader

AY-L23

KEY FEATURES

- Can operate as a standalone controller (with external relay)
- Optical back tamper
- Can operate only with SA-23-B2/B4 remote controls
- Read range of 70 m (229.6 ft.)
- Two different Wiegand output formats
- Note: Does not read RFID cards



SA-23-B2

2-Channel Transmitter for AY-L23 Reader

SA-23-B2

KEY FEATURES

- In Standalone mode, each button on the SA-23-B2 can be registered to activate different outputs in the AY-L23



SA-23-B4

4-Channel Transmitter for AY-L23 Reader

SA-23-B4

KEY FEATURES

- Each button is programmed to output a different Wiegand ID for flexible and advanced access control operation

13.56 MHz – Open to Secure® – O2S®

Product	Frequency	Technology	Technology	Interface	Read Distance	Encryption	Tamper Output (Open collector)	IP Rating	Operating Voltage (VDC)	Weight of Pigtail Models	Weight of Terminal Block and OSDP Models
AY-H6270B	13.56Mhz	MIFARE, MIFARE Plus	Mifare Classic, Plus	Wiegand, OSDP	45mm	128AES	30mA	IP65	8.5-16	161 g (5.7 oz)	147 g (5.2 oz)
AY-H6280B	13.56Mhz	MIFARE, DESFire EV1	Mifare Classic, Desfire EV1	Wiegand, OSDP	45mm	128AES	30mA	IP65	8.5-16	168 g (5.9 oz)	144 g (5.1 oz)
AY-G6270B	13.56Mhz	MIFARE, MIFARE Plus	Mifare Classic, Plus	Wiegand, OSDP	40mm	128AES	30mA	IP65	8.5-16	155 g (5.5 oz)	144 g (5.1 oz)
AY-G6280B	13.56Mhz	MIFARE, DESFire EV1	Mifare Classic, Desfire EV1	Wiegand, OSDP	40mm	128AES	30mA	IP65	8.5-16	153 g (5.4 oz)	135 g (4.8 oz)
AY-G6370B	13.56Mhz	MIFARE, MIFARE Plus	PIN, Mifare Classic, Plus	Wiegand, OSDP	40mm	128AES	30mA	IP65	8.5-16	236 g (8.3 oz)	218 g (7.7 oz)
AY-G6380B	13.56Mhz	MIFARE, DESFire EV1	PIN, Mifare Classic, Desfire EV1	Wiegand, OSDP	40mm	128AES	30mA	IP65	8.5-16	231 g (8.1 oz)	219 g (7.7 oz)
AY-H6370B	13.56Mhz	MIFARE, MIFARE Plus	PIN, Mifare Classic, Plus	Wiegand, OSDP	45mm	128AES	30mA	IP65	8.5-16	220 g (7.8 oz)	196 g (6.9 oz)
AY-H6380B	13.56Mhz	MIFARE, DESFire EV1	PIN, Mifare Classic, Desfire EV1	Wiegand, OSDP	45mm	128AES	30mA	IP65	8.5-16	218 g (7.7 oz)	201 g (7.1 oz)

CSN SMART & CSN SELECT

Product	Frequency	Technology	Interface	Read Distance	Convertible Standalone 500 users	Tamper Output (Open collector)	IP Rating	Operating Voltage (VDC)	Weight
CSN SMART									
AY-H6255BT*	BLE + 13.56 MHz	BLUETOOTH + MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, OSDP	70mm/12M		16mA	IP65	8.5-16	177 g (6.2 oz)
AY-H6355BT*	BLE + 13.56 MHz	BLUETOOTH + MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, OSDP	100mm/12M		16mA	IP65	8.5-16	190 g (6.7 oz)
CSN SELECT									
AY-L6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, C&D	50mm		16mA	IP65	8.5-16	130 g (4.6 oz)
AY-K6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, C&D	50mm		16mA	IP65	8.5-16	73 g (2.6 oz)
AY-M6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, OSDP, C&D	50mm		16mA	IP65	8.5-16	167 g (5.9 oz)
AY-H6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, OSDP, C&D	90mm		16mA	IP65	8.5-16	177 g (6.2 oz)
AY-Q6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, C&D	50mm		16mA	IP65	8.5-16	410g (14.5 oz)
AY-R6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, C&D	50mm		16mA	IP65	8.5-16	208 g (7.3 oz)
AYC-M6355	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, OSDP, C&D	50mm	✓	16mA	IP65	8.5-16	169 g (5.9 oz.)
AYC-H6355	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, OSDP, C&D	50mm	✓	16mA	IP65	8.5-16	185 g (6.5 oz.)
AYC-Q6355	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	Wiegand, C&D	50mm	✓	16mA	IP65	8.5-16	430 g (15.2 oz.)
DR-6255	13.56Mhz	MIFARE, DESFIRE, NFC, Iclass (CSN)	USB					5V Via USB	130 g (4.6 oz.)

* Support BLE-Admin and BLE-ID mobile apps

MIFARE® Classic CSN & MIFARE® Sector

Product	Frequency	Technology	Interface	Read Distance	Encryption	Tamper Output (Open collector)	IP Rating	Operating Voltage (VDC)	Weight
MIFARE Classic CSN									
AY-H25B	13.56Mhz	MIFARE CLASSIC	Wiegand, C&D	70 mm (2.8 in.)		16mA	IP65	5-16	116.9 g (4.1 oz)
AY-L25B	13.56Mhz	MIFARE CLASSIC	Wiegand, C&D	70 mm (2.8 in.)		16mA	IP65	5-16	111.1 g (3.9 oz)
AY-K25B	13.56Mhz	MIFARE CLASSIC	Wiegand, C&D	60 mm (2.4 in.)		16mA	IP65	5-16	68.5 g (2.4 oz)
AY-M25B	13.56Mhz	MIFARE CLASSIC	Wiegand, C&D	65 mm (2.6 in.)		16mA	IP65	5-16	109.1 g (3.8 oz.)
AY-H5B	13.56Mhz	MIFARE CLASSIC	Wiegand	70 mm (2.8 in.)				5-16	74.8 g (2.6 oz)
AY-L5B	13.56Mhz	MIFARE CLASSIC	Wiegand	70 mm (2.8 in.)				5-16	70.6 g (2.5 oz)
AY-K5B	13.56Mhz	MIFARE CLASSIC	Wiegand	60 mm (2.4 in.)				5-16	34.3 g (1.2 oz)
AY-M5B	13.56Mhz	MIFARE CLASSIC	Wiegand	65 mm (2.6 in.)				5-16	75.0 g (2.6 oz.)
AY-T6350	13.56Mhz	PIN, MIFARE CLASSIC	Wiegand, C&D	70 mm (2.8 in.)		32mA	IP68	8.5-16	170 g (6 oz)
MIFARE Sector									
AY-M26	13.56Mhz	MIFARE Sector	Wiegand, C&D	45 mm (1.8")	Sector	30mA	IP65	6.5-16	116 g (0.3 lb)
AY-W6260	13.56Mhz	MIFARE Sector	Wiegand, C&D	45 mm (1.8")	Sector	30mA	IP65	5-16	230 g (8.1 oz)
AY-W6360	13.56Mhz	PIN, MIFARE Sector	Wiegand, C&D	45 mm (1.8")	Sector	30mA	IP65	5-16	230 g (8.1 oz)
AY-Q6260	13.56Mhz	MIFARE Sector	Wiegand, C&D	45 mm (1.8")	Sector	30mA	IP65	5-16	480 g (1.1 lb)
AY-Q6360	13.56Mhz	PIN, MIFARE Sector	Wiegand, C&D	45 mm (1.8")	Sector	30mA	IP65	5-16	480 g (1.1 lb)



Readers

Technical Specifications

PROX and goPROX®

Product	Frequency	Technology	Interface	Read Distance	Convertible Standalone 500 users	Tamper Output (Open collector)	IP Rating	Operating Voltage (VDC)	Weight
PROX									
AY-H12C	125Khz	Prox	Wiegand, C&D, RS-232	10 cm (3.9")		16 mA	IP65	5-16	100 g (3.5 oz)
AY-L12C	125Khz	Prox	Wiegand, C&D, RS-232	10 cm (3.9")		16 mA	IP65	5-16	116 g (4.1 oz)
AY-K12C	125Khz	Prox	Wiegand, C&D, RS-232	8 cm (3.1")		16 mA	IP65	5-16	70.5 g (2.5 oz)
AY-M12C	125Khz	Prox	Wiegand, C&D, RS-232	10 cm (3.9")		16 mA	IP65	5-16	109 g (3.9 oz)
AY-Q12C	125Khz	Prox	Wiegand, C&D, RS-232	3.5 cm (1.4")		16 mA	IP65	5-16	480 g (17.0 oz)
AY-H2B	125Khz	Prox	Wiegand	10 cm (4 in.)				5-16	74.7 g (2.6 oz)
AY-L2B	125Khz	Prox	Wiegand	10 cm (4 in.)				5-16	71.1 g (2.5 oz)
AY-K2B	125Khz	Prox	Wiegand	8 cm (3.2 in.)				5-16	35.1 g (1.2 oz)
AY-M2B	125Khz	Prox	Wiegand	10 cm (4 in.)				5-16	75.0 g (2.6 oz.)
AYC-G64	125Khz	PIN & Prox	Wiegand, C&D	8 cm (3.2 in.)	✓	32 mA	IP65	5-16	160 g (5.6 oz)
AYC-F64	125Khz	PIN & Prox	Wiegand, C&D	8 cm (3.2 in.)	✓	32 mA	IP65	5-16	215 g (7.6 oz)
AYC-E65B	125Khz	PIN & Prox	Wiegand, C&D	4 cm (1.6 in.)	✓	30 mA	IP68	5-16	143 g (5.0 oz)
AYC-T65	125Khz	PIN & Prox	Wiegand, C&D	4 cm (1.6 in.)	✓	30 mA	IP68	5-16	121 g (4.3 oz)
AYC-Q64B	125Khz	PIN & Prox	Wiegand, C&D	4.5 cm (1.8 in.)	✓	30 mA	IP65	5-16	480 g (1.1 lb)
AY-V12B	125Khz	Prox	Wiegand	22 cm (9 in.)	-	30 mA	IP54	5-16	285 g (10.1 oz)
AY-V64B	125Khz	PIN & Prox	Wiegand, C&D	22 cm (9 in.)	-	30 mA	IP54	5-16	285 g (10.1 oz)
AY-Z12A	125Khz	Prox	Wiegand	60 cm (23.6 in.)	-	30 mA	IP54	10-16	1.066 kg (2.35 lbs)
DR-12C	125Khz	Prox	USB	Up to 5 cm (2 in.)			IP54	5	130 g (4.6 oz)
goPROX									
AYC-G60	125Khz	Prox, HID Prox	Wiegand, C&D	6 cm (2.36 in.)	✓	32 mA	IP65	5-16	160 g 0.35 lbs
AYC-F60	125Khz	Prox, HID Prox	Wiegand, C&D	6 cm (2.36 in.)	✓	32 mA	IP65	5-16	480 g 1.05 lbs
AYC-E60	125Khz	Prox, HID Prox	Wiegand, C&D	6 cm (2.36 in.)	✓	32 mA	IP65	5-16	143 g 0.31 lbs
AYC-Q60	125Khz	Prox, HID Prox	Wiegand, C&D	6 cm (2.36 in.)	✓	32 mA	IP65	5-16	480 g 1.05 lbs
Modules									
MD-12W	125Khz	Prox	Wiegand	5 cm (2 in.)			IP65	5	5 g (0.2 oz)
MD-12C	125Khz	Prox	C&D	5 cm (2 in.)			IP65	5	5 g (0.2 oz)



PIN Code

Product	Keypad matrix	Keypad type	Interface	Convertible Standalone 500users	Tamper Output (Open collector)	IP Rating	Operating Voltage (VDC)	Weight
AYC-G54	2x6	Backlit	Wiegand, C&D	✓	32 mA	IP65	5-16	160 g (5.6 oz)
AYC-F54	3x4	Backlit	Wiegand, C&D	✓	32 mA	IP65	5-16	215 g (7.6 oz)
AYC-E55	2x6	Piezo	Wiegand, C&D	✓	30 mA	IP68	5-16	120 g (4.2 oz)
AYC-Q54B	3x4	Backlit	Wiegand, C&D	✓	30 mA	IP65	5-16	480 g (1.1 lb)
AY-S55	2x6	Piezo	Wiegand, C&D		32 mA	IP65	5-16	400 g (14.11 oz)
AY-T55	3x4	Piezo	Wiegand, C&D		32 mA	IP65	5-16	500 g (17.64 oz)
AY-D09M	3x4	Standard	Wiegand, C&D		32 mA	IP54	5-16	110 g (3.88 oz)

UHF Long Range

Product	Frequency	Technology	Interface	Read Distance	IP Rating	Operating Voltage (VDC)	Weight
UHF Long range							
AY-U920BT*	US: 902–928 MHz (America) EU: 865–868 MHz (Europe) Country dependent	UHF, Bluetooth	Wiegand, OSDP	0.5 to 12 m (1.6 to 39.4 ft)	IP65	8-15	2.8 kg (6.2 lb)
AY-U915BT*	US: 902–928 MHz (America) EU: 865–868 MHz (Europe) Country dependent	UHF, Bluetooth	Wiegand, OSDP	0.5 to 6 m (1.6 to 19.7 ft)	IP65	9-15	2.5 kg (5.5 lb)
DR-U955BT*	RFID: 13.56 MHz US: 902–928 MHz (America) EU: 865–868 MHz (Europe) Bluetooth: 2.402-2.480 GHz	MIFARE, UHF, Bluetooth	USB			5	130 g (4.6 oz.)
RF Long Range							
AY-L23**	G: 433.92 MHz H: 868.35 MHz	RF	Wiegand	70 m (230 ft)	IP65	7-24	500 g (1.1 lb)
SA-23-B2/B4	G: 433.92 MHz H: 868.35 MHz	RF		70 m (230 ft)	IP65	3V	21 g (0.74 oz)

* Support BLE-Admin and BLE-ID mobile apps

** Equipped with open collector tamper output 16mA and Relay 200mA

Biometric Terminals



Biometric Terminals

Bio8000 Series

Rosslare Bio series cater to a wide range of indoor and outdoor applications for both large and small companies, offering advanced features including liveness check and facial recognition. Our Red Dot award-winning legacy biometric readers are designed for organizations seeking to avoid storage of fingerprint data on the device. Match on Card readers lack the user template limitations of traditional readers, making them especially suitable for large scale applications.



AY-B8520/ AY-B8550

Fingerprint & Card Reader

- For indoor applications



AY-B8620/ AY-B8650

Fingerprint & Card Reader

- For outdoor applications

AY-B8520/AY-B8550

KEY FEATURES

- Encrypted data
- RFID card reader – 125 kHz (EM) / 13.56 MHz (MIFARE)
- 7000 fingerprint templates
- Recognition in less than 1 second
- TCP/IP, Wiegand 26-Bit, RS-485

AY-B8620/AY-B8650

KEY FEATURES

- Encrypted data
- RFID card reader – 125 kHz (EM) / 13.56 MHz (MIFARE)
- 7000 fingerprint templates
- Recognition in less than 1 second
- Rugged metal case for additional protection
- Anti-Vandal case (IK10) & waterproof (IP65)
- TCP/IP, Wiegand 26-Bit, RS-485



DR-B8000

USB Fingerprint Enrollment Desktop Reader for the Biometric Reader 8000 Series

DR-B8000

KEY FEATURES

- Compatible with Rosslare AxTrax and BIO8000 management software
- USB connectivity to PC
- Optical sensor with glass scanning surface
- Acquire high resolution images
- Supports the 8000 biometric series

Related Software

RosslareBio 8000

BIO 8000

Standalone BIO8000 terminals management software, with access control and T&A functionality

AxTraxNG™

AxTraxNG

Fully integrated with AxTraxNG for seamless operation, template management and access

Biometric Terminals

Bio9000 Series



AY-B9120BT/ AY-B9150BT

Fingerprint & Card Reader with Rosslare BLE-ID™



AY-B9250BT

Fingerprint & Card reader with built-in camera, LCD and BLE-ID



AY-B9120BT/ AY-B9150BT KEY FEATURES

- Liveness check in less than 1 second
- Encrypted data
- RFID card reader – 125 kHz (EM) / 13.56 MHz (MIFARE)
- Dual authentication (card and fingerprint) for improved security
- Built-in camera for event recording and recreation
- Rosslare BLE-ID™ app support
- 20,000 fingerprint templates
- Waterproof (IP65)
- TCP/IP, Wiegand 26-Bit/34-Bit, RS-485
- Built-in relay

AY-B9250BT KEY FEATURES

- Liveness check in less than 1 second
- Encrypted data
- RFID card reader – 13.56 MHz (MIFARE)
- Dual authentication (card and fingerprint) for improved security
- Four touch function keys and LCD display
- Camera for recording photo snapshots based on terminal activity
- Rosslare BLE-ID™ app support
- 20,000 fingerprint templates
- Waterproof (IP65)
- TCP/IP, Wiegand 26-Bit/34-Bit, RS-485
- Built-in relay

Rosslare Mobile Apps



Rosslare BLE-Admin™ Configuration App

Available for iOS and Android



Rosslare BLE-ID™ Mobile Credentials App

Available for iOS (Bluetooth) and Android (Bluetooth & NFC)

Biometric Terminals

Bio9000 Series



AY-B9350

Face & Fingerprint Recognition Reader with dual RFID Card Reader & PIN Code

- For indoor applications

AY-B9350

KEY FEATURES

- Fingerprint Liveness check – in less than 1 second
- Encrypted data
- RFID card reader – 125 kHz (EM) & 13.56 MHz (MIFARE)
- 100,000 fingerprint templates & 10,000 face templates
- TCP/IP, Wiegand 26-Bit/34-Bit, RS-485
- Built-in relay



DR-B9000

USB Fingerprint Enrollment Desktop Reader for the Biometric Reader 9000 Series

DR-B9000

KEY FEATURES

- Compatible with Rosslare AxTrax and BIO9000 management software
- USB connectivity to PC
- Fingerprint Liveness check optical sensor
- Acquire high resolution images
- Supports the 9000 biometric series

Related Software

RosslareBio 9000

BIO 9000

Standalone BIO9000 terminals management software, with access control and T&A functionality

AxTraxNG™

 AxTraxNG

Fully integrated with AxTraxNG for seamless operation, template management and access, providing advance features, face and finger remote enrollment and more

Biometric Terminals

13.56 MHz – Legacy Biometric



AS-B01

Management Software for Legacy Biometric Readers



CP-R26A

MIFARE Classic® EV1 and MIFARE Sector Card and Fingerprint Desktop Programmer



AY-B1660A

Full Fingerprint Match-on-Card Reader



AY-B2660A

Full Fingerprint Match-on-Card Reader



AYC-B7661A

Full Fingerprint 1:1 / 1:N Convertible Reader

KEY FEATURES

- Reads MIFARE Classic® EV1
- Unlimited number of users
- Match-On-Card technology
- Configurable multi output format
- Optical tamper sensor
- Convertible controller with up to 107 fingerprint templates (AYC-B7661A)



Biometric Terminals

Technical Specifications

Biometric Terminals 125Khz / 13.56Mhz


Product	Frequency	Technology	Interface	Read Distance	FP Templates	Users	Event log	Tamper Output (Open collector)	Relay	IP Rating	Operating Voltage (VDC)	Weight
8000 SERIES												
AY-B8520	125Khz	FP & Prox	TCP/IP, Wiegand, RS-485	2.5 cm	7K	up to 7K	50K				12	400 g (14.1 oz)
AY-B8550	13.56MHZ	FP & Prox	TCP/IP, Wiegand, RS-485	2.5 cm	7K	up to 7K	50K				12	400 g (14.1 oz)
AY-B8620	125Khz	FP & Prox	TCP/IP, Wiegand, RS-485	2.5 cm	7K	up to 7K	100K	✓		IP65	12	780 g (27.5 oz.)
AY-B8650	13.56MHZ	FP & Prox	TCP/IP, Wiegand, RS-485	2.5 cm	7K	up to 7K	100K	✓		IP65	12	780 g (27.5 oz.)
DR-B8000			USB								5	
9000 SERIES												
AY-B9120BT*	2.4 GHz + 125 kHz	FP & Prox & Bluetooth	TCP/IP, Wiegand, RS-485	BLE - 12M / EM - 5 cm	20K	Up to 10K	100K	✓	✓	IP65	Unique Power supply	700 g (1.54 lbs)
AY-B9150BT*	2.4 GHz + 13.56 MHz	FP & Prox & Bluetooth	TCP/IP, Wiegand, RS-485	BLE - 12M / MIFARE - 5 cm	20K	Up to 10K	100K	✓	✓	IP65	Unique Power supply	700 g (1.54 lbs)
AY-B9250BT*	2.4 GHz + 13.56 MHz	FP & Prox & Bluetooth	TCP/IP, Wiegand, RS-485	BLE - 12M / MIFARE - 5 cm	20K	Up to 10K	100K	✓	✓	IP65	Unique Power supply	700 g (1.54 lbs)
AY-B9350	125 kHz + 13.56 MHz	Face & FP & Prox & PIN	TCP/IP, Wiegand, RS-485	MIFARE / EM - 5 cm	100K + 10K (1:1) & 2K (1:N) face	Up to 50KFP	1000K	✓		IP65	Unique Power supply	1,100 g (2.42 lbs)
DR-B9000			USB					✓			5	210 g (0.46 lbs)

* Support BLE-Admin and BLE-ID mobile apps

Legacy Biometric

Product	Frequency	Technology	Interface	Read Distance	FP Templates	Tamper Output (Open collector)	Standalone convertible (users)	Indoor	Operating Voltage (VDC)	Weight
AY-B1660A	13.56 MHz	MIFARE, Sector	Wiegand, C&D	4 cm (1.6 in.)	1:N	✓		✓	5-16	79 g (2.8 oz)
AY-B2660A	13.56 MHz	MIFARE, Sector	Wiegand, C&D	4 cm (1.6 in.)	1:N	✓		✓	5-16	156 g (5.5 oz)
AYC-B7661A	13.56 MHz	MIFARE, Sector	Wiegand, C&D	4 cm (1.6 in.)	1:N / 107	✓	107	✓	5-16	156 g (5.5 oz)
CP-R26A	13.56 MHz	MIFARE, Sector	USB		1:1, 1:N			✓	5	309 g (10.9 oz)

Credentials

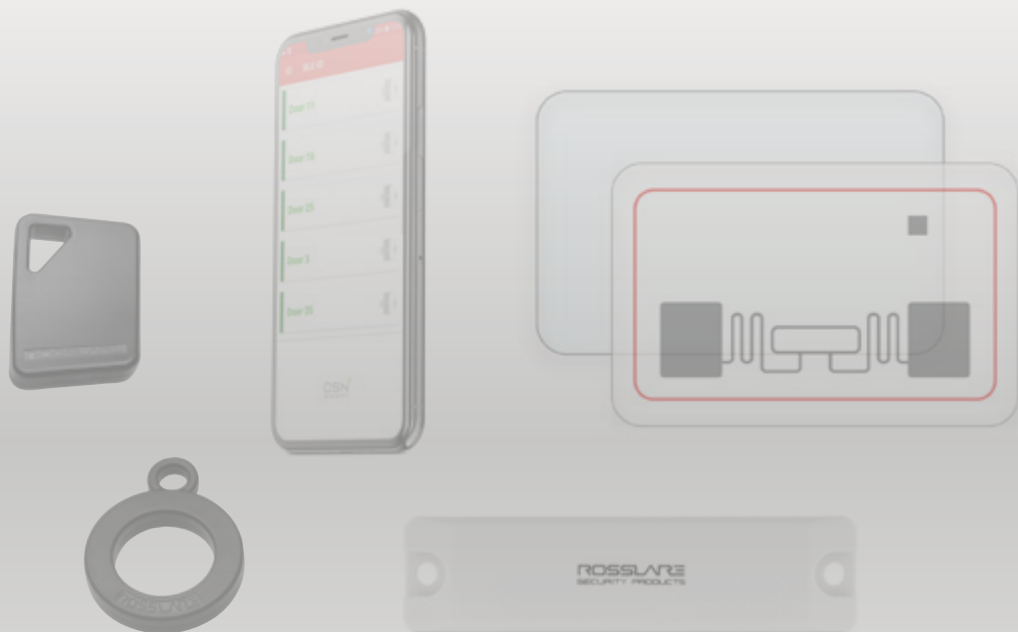

Credentials

Credentials are crucial for user identity validation. Rosslare offers a selection of high-quality, long-lasting credentials supporting multiple technologies as BLE, MIFARE, Alien Higgs and more.

Recognized for their high number of possible reads and extensive customization services such as programmable laser engraving and printing, our card credentials are photo ID compatible and can be directly printed on by adding an image or via thermal transfer.



O2S - MIFARE Plus & Desfire EV1

- Offers the MAXIMUM level of security
- Comes in variety of form factors
- Pre-formatted and pre-programmed
- Supports multi-applications



NFC and BLE-ID for Mobile Devices

- Easy to use
- Ideal for no-touch operation
- Supports NFC for Android and BLE for Android & iOS
- Fits any access control system



13.56 MIFARE Classic Credentials

- Great quality and range
- Full customization services
- Comes in variety of form factors
- Original NXP chip inside



UHF Alien Higgs-3 Credentials























- Suits any vehicle related application
- Offer great reading distance
- Comes in variety of form factors
- Ideal for hands free and no-touch operation



125KHz EM and Temic Credentials





- EM and Temic
- Comes in variety of form factors
- Highly reliable, and interference-free
- Strong, sturdy, and robust

02S - MIFARE Plus & Desfire EV1

Part Number	Type	Technology	Programmable Memory Size	Form Factor	Format	ID Printing
 AT-P4S-000-0000	Not Programmed	MIFARE Plus S	2K/4K	ISO Card (PVC)	Not Formatted	No ID Printed
 RT-P2S-26A-3000 RT-P4S-26A-3000	02S – Rosslare Keys	MIFARE Plus S	2K/4K	ISO Card (PVC)	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 RT-P2S-38A-3000 RT-P4S-38A-3000	02S – Rosslare Keys	MIFARE Plus S	2K/4K	ISO Card (PVC)	Wiegand 38-Bit (Rosslare Proprietary)	Inkjet – FC & Card ID (decimal)
 AT-P2K-000-0SB0 AT-P4K-000-0SB0	Not Programmed	MIFARE Plus S	2K/4K	Key Fob (Shark)	Not Formatted	No ID Printed
 RT-P2K-26A-7SB0 RT-P4K-26A-7SB0	02S – Rosslare Keys	MIFARE Plus S	2K/4K	Key Fob (Shark)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-P2K-38A-7SB0 RT-P4K-38A-7SB0	02S – Rosslare Keys	MIFARE Plus S	2K/4K	Key Fob (Shark)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-P2K-000-0RB0 AT-P4K-000-0RB0	Not Programmed	MIFARE Plus S	2K/4K	Key Fob (Ring)	Not Formatted	No ID Printed
 RT-P2K-26A-7RB0 RT-P4K-26A-7RB0	02S – Rosslare Keys	MIFARE Plus S	2K/4K	Key Fob (Ring)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-P2K-38A-7RB0 RT-P4K-38A-7RB0	02S – Rosslare Keys	MIFARE Plus S	2K/4K	Key Fob (Ring)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-P2K-000-0TB0 AT-P4K-000-0TB0	Not Programmed	MIFARE Plus S	2K/4K	Key Fob (Twist)	Not Formatted	No ID Printed
 RT-P2K-26A-7TB0 RT-P4K-26A-7TB0	02S – Rosslare Keys	MIFARE Plus S	2K/4K	Key Fob (Twist)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-P2K-38A-7TB0 RT-P4K-38A-7TB0	02S – Rosslare Keys	MIFARE Plus S	2K/4K	Key Fob (Twist)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-X2S-000-0000 AT-X4S-000-0000	Not Programmed	MIFARE Plus X	2K/4K	ISO Card (PVC)	Not Formatted	No ID Printed
 RT-X2S-26A-3000 RT-X4S-26A-3000	02S – Rosslare Keys	MIFARE Plus X	2K/4K	ISO Card (PVC)	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 RT-X2S-38A-3000 RT-X4S-38A-3000	02S – Rosslare Keys	MIFARE Plus X	2K/4K	ISO Card (PVC)	Wiegand 38-Bit (Rosslare Proprietary)	Inkjet – FC & Card ID (decimal)
 AT-X2K-000-0SB0 AT-X4K-000-0SB0	Not Programmed	MIFARE Plus X	2K/4K	Key Fob (Shark)	Not Formatted	No ID Printed
 RT-X2K-26A-7SB0 RT-X4K-26A-7SB0	02S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Shark)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-X2K-38A-7SB0 RT-X4K-38A-7SB0	02S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Shark)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-X2K-000-0RB0 AT-X4K-000-0RB0	Not Programmed	MIFARE Plus X	2K/4K	Key Fob (Ring)	Not Formatted	No ID Printed
 RT-X2K-26A-7RB0 RT-X4K-26A-7RB0	02S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Ring)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-X2K-38A-7RB0 RT-X4K-38A-7RB0	02S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Ring)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-X2K-000-0TB0 AT-X4K-000-0TB0	Not Programmed	MIFARE Plus X	2K/4K	Key Fob (Twist)	Not Formatted	No ID Printed
 RT-X2K-26A-7TB0 RT-X4K-26A-7TB0	02S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Twist)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-X2K-38A-7TB0 RT-X4K-38A-7TB0	02S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Twist)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)



O2S - MIFARE Plus & Desfire EV1






Part Number	Type	Technology	Programmable Memory Size	Form Factor	Format	ID Printing
 AT-X2K-000-0RB0 AT-X4K-000-0RB0	Not Programmed	MIFARE Plus X	2K/4K	Key Fob (Ring)	Not Formatted	No ID Printed
 RT-X2K-26A-7RB0 RT-X4K-26A-7RB0	O2S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Ring)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-X2K-38A-7RB0 RT-X4K-38A-7RB0	O2S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Ring)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-X2K-000-0TB0 AT-X4K-000-0TB0	Not Programmed	MIFARE Plus X	2K/4K	Key Fob (Twist)	Not Formatted	No ID Printed
 RT-X2K-26A-7TB0 RT-X4K-26A-7TB0	O2S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Twist)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-X2K-38A-7TB0 RT-X4K-38A-7TB0	O2S – Rosslare Keys	MIFARE Plus X	2K/4K	Key Fob (Twist)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)
 AT-V2S-26A-0000 AT-V4S-26A-0000 AT-V8S-26A-0000	Not Programmed	MIFARE DESFire EV1	2K/4K/8K	ISO Card (PVC)	Wiegand 26-Bit	No ID Printed
 RT-V2S-26A-3000 RT-V4S-26A-3000 RT-V8S-26A-3000	O2S – Rosslare Keys	MIFARE DESFire EV1	2K/4K/8K	ISO Card (PVC)	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 RT-V2S-38A-3000 RT-V4S-38A-3000 RT-V8S-38A-3000	O2S – Rosslare Keys	MIFARE DESFire EV1	2K/4K/8K	ISO Card (PVC)	Wiegand 38-Bit (Rosslare Proprietary)	Inkjet – FC & Card ID (decimal)
 AT-V2K-000-0SB0 AT-V4K-000-0SB0 AT-V8K-000-0SB0	Not Programmed	MIFARE DESFire EV1	2K/4K/8K	Key Fob (Shark)	Wiegand 26-Bit	No ID Printed
 RT-V2K-26A-7SB0 RT-V4K-26A-7SB0 RT-V8K-26A-7SB0	O2S – Rosslare Keys	MIFARE DESFire EV1	2K/4K/8K	Key Fob (Shark)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 RT-V2K-38A-7SB0 RT-V4K-38A-7SB0 RT-V8K-38A-7SB0	O2S – Rosslare Keys	MIFARE DESFire EV1	2K/4K/8K	Key Fob (Shark)	Wiegand 38-Bit (Rosslare Proprietary)	Laser Engraving – FC & Card ID (decimal)

13.56 MIFARE Classic Credentials







	Part Number	Type	Technology	Programmable Memory Size	Form Factor	Format	ID Printing
	AT-D1S-000-0001 AT-D4S-000-0001	Not Programmed	MIFARE Classic EV1 – 4UID	1K/4K	ISO Card (PVC)	Not Formatted	No ID Printed
	AT-C1S-000-0000 AT-C4S-000-0000	Not Programmed	MIFARE Classic EV1 – 7UID	1K/4K	ISO Card (PVC)	Not Formatted	No ID Printed
	RT-C1S-26A-3000 RT-C4S-26A-3000	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	ISO Card (PVC)	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
	RT-C1S-38A-3000 RT-C4S-38A-3000	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	ISO Card (PVC)	Rosslare Wiegand 38-Bit	Inkjet – FC & Card ID (decimal)
	AT-D1K-000-0SB0 AT-D4K-000-0SB0	Not Programmed	MIFARE Classic EV1 – 4UID	1K/4K	Key Fob (Shark)	Not Formatted	No ID Printed
	AT-C1K-000-0SB0 AT-C4K-000-0SB0	Not Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Shark)	Not Formatted	No ID Printed
	RT-C1K-26A-7SB0 RT-C4K-26A-7SB0	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Shark)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
	RT-C1K-38A-7SB0 RT-C4K-38A-7SB0	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Shark)	Rosslare Wiegand 38-Bit	Laser Engraving – FC & Card ID (decimal)
	AT-C1K-000-0RB0 AT-C4K-000-0RB0	Not Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Ring)	Not Formatted	No ID Printed
	RT-C1K-26A-7RB0 RT-C4K-26A-7RB0	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Ring)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
	RT-C1K-38A-7RB0 RT-C4K-38A-7RB0	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Ring)	Rosslare Wiegand 38-Bit	Laser Engraving – FC & Card ID (decimal)
	AT-C1K-000-0TB0 AT-C4K-000-0TB0	Not Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Twist)	Not Formatted	No ID Printed
	RT-C1K-26A-7TB0 RT-C4K-26A-7TB0	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Twist)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
	RT-C1K-38A-7TB0 RT-C4K-38A-7TB0	O2S – Programmed	MIFARE Classic EV1 – 7UID	1K/4K	Key Fob (Twist)	Rosslare Wiegand 38-Bit	Laser Engraving – FC & Card ID (decimal)



UHF Alien Higgs-3 Credentials


Part Number	Type	Technology	Programmable Memory Size	Form Factor	Format	ID Printing
 LT-UVS-26A-3000	Programmed	ISO18000-6C	64 Bytes	ISO Card (PVC)	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 LT-UVH-26A-7000	Programmed	ISO18000-6C	64 Bytes	Hard Tag	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 LT-UVT-26A-3001	Programmed	ISO18000-6C	64 Bytes	Tamper Paper Label	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 AT-UVT-000-0001	Not Programmable	ISO18000-6C	64 Bytes	Tamper Paper Label	Not Formatted	No ID Printed
 AT-Z4S-000-0001	Not Programmable	ISO18000-6C + MIFARE Classic EV1	4K	ISO Card (PVC)	Not Formatted	No ID Printed

125KHz EM and Temic Credentials

Part Number	Type	Technology	Prog. Mem. Size	Form Factor	Format	ID Printing
 AT-TUC-000-0001 AT-TUC-000-0000	Not Programmable	TEMIC (ASK)	32 Bytes	Clamshell Card	Not Formatted	No ID Printed
 AT-TUS-000-0001 AT-TUS-000-0000	Not Programmable	TEMIC (ASK)	32 Bytes	ISO Card (PVC)	Not Formatted	No ID Printed
 AT-ERC-26A-3001 AT-ERC-26A-3000	Not Programmable	EM	Read-Only	Clamshell Card	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 AT-ERS-26A-3001 AT-ERS-26A-3000	Not Programmable	EM	Read-Only	ISO Card (PVC)	Wiegand 26-Bit	Inkjet – FC & Card ID (decimal)
 AT-ERK-26A-7RB0 AT-ERK-26A-7RL0	Not Programmable	EM	Read-Only	Key Fob (Ring)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)
 AT-ERK-26A-7TB0 AT-ERK-26A-7TL0	Not Programmable	EM	Read-Only	Key Fob (Twist)	Wiegand 26-Bit	Laser Engraving – FC & Card ID (decimal)



Accessories

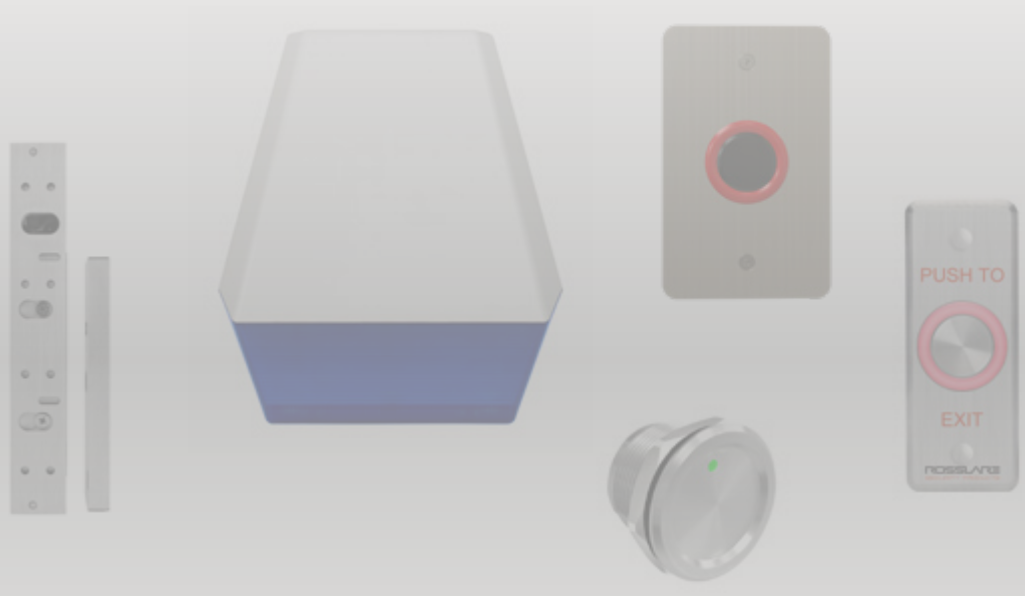

Rosslare has it all under one roof, featuring an extensive selection of general accessories such as power supplies, connectivity products, wireless receivers, and a comprehensive list of door accessories such as switches, electromagnetic locks and REX buttons.




EX-06

Analog Piezoelectric REX Switch with Toggle Option



EX-16

Analog Mullion Size Piezoelectric REX Switch with Toggle Option



EX-07

Digital Piezoelectric REX Switch with Toggle Option



EX-17

Digital Mullion Size Piezoelectric REX Switch with Toggle Option

KEY FEATURES

- Highly-sensitive piezoelectric REX button series
- Adjustable lock release time using potentiometer
- Up to 2 A switching current
- Standard single US gang box and mullion sizes
- Basic, non-powered analog model (EX-06, EX-16)
- Advanced digital model (EX-07, EX-17)
- Externally controlled lighting and built-in sounder
- External input for alarm/evacuation light flashing indications
- Stainless steel surface and potted, sealed interior with external connections and setup compartment (EX-06, EX-16, EX-07, EX-17)
- Custom labeling per demand

Door Accessories

EX (REX) Buttons



EX-H22N

Passive Infrared
Anti-Vandal Motion
Sensor Switch

- No-touch switch



EX-M22N

Passive Infrared
Anti-Vandal Motion
Sensor Switch

- No-touch switch



EX-H22

Passive Infrared
Motion Sensor
Switch

- No-touch switch



EX-M22

Passive Infrared
Motion Sensor
Switch

- No-touch switch



EX-H04

Plastic Slim
Piezoelectric
REX Switch
with Light Ring



EX-M04

Plastic Slim
Piezoelectric
REX Switch
with Light Ring



EX-01

Plastic Switch
with "PUSH TO
EXIT" lettering



EX-02

Plastic
Switch with
"EMERGENCY"
lettering




Door Accessories

PX Switches




PX-13

Small Metallic
Piezoelectric
Push Button



PX-23

Small Metallic
Piezoelectric
Push Button
with Spot LED



PX-34

Small Metallic
Piezoelectric
Push Button with
Toggle Option and
Ring LED



Door Accessories

Electromagnetic Locks



LK-M12L

1200 lb / 540 kg
Electromagnetic Lock
with Lock Status &
Indicator



LK-M06L

600 lb / 270 kg
Electromagnetic Lock
with Lock Status &
Indicator



LK-M03

300 lb / 134 kg
Electromagnetic Lock
with Lock Status &
Indicator



LA-L12 + LA-Z12

Adjustable L-Bracket
and L&Z Bracket for
LK-M12L



LA-L06 + LA-Z06

Adjustable L-Bracket
and L&Z Bracket for
LK-M06L



LA-L03 + LA-Z03

Adjustable L-Bracket
and L&Z Bracket for
LK-M03



LA-U12

U-Bracket for Glass Door,
for use with LK-M12L &
LK-M06L



LA-U03

U-Bracket for Glass Door,
for use with LK-M03

Door Accessories

Wired Sensors



SA-01PW

Digital Wired Pet Immune PIR Motion Detector

- Power Level Discriminator: Special lens combines power algorithm, ignores small-to medium-sized animals, while maintaining a high level of human detection



PYR-4122

Analog Wired PET Immune Passive IR Motion Detector

- Flexibility of operation and installation
- Vertical adjustment – 3-height scale



PYR-0021

Advanced Compact Spherical Lens PIR Detector

- Optional curtain adaptor for narrowed detection
- SSFL technology (look-down)



PYR-1021

Dual PIR / Microwave Motion Detector with Anti-masking

- Optional curtain adaptor for narrowed detection
- SSFL technology (look-down)



PYR-2023

Ceiling PIR Motion Detector



PYR-3021

Wired Ceiling PIR Motion Detector

- Extra wide, free height installation, with no PCB adjustment required



Door Accessories

Wired Sensors



SA-64-2W

Photoelectric Smoke Detector for Conventional Fire Alarms



SA-64-3W

Photoelectric Smoke Detector for Wired Intrusion Panels



SH-02

Magnetic Contact



SH-12

Cylindrical Magnetic Contact



SA-31

Wired Flood Detector

- Supplied with a 150-cm (4.92-ft) cable



SA-21

Hardwired Vibration Detector



Door Accessories

Wired Sensors & Sounders



SA-95A/L

Wired Mini-piezoelectric Siren and Strobe

- Piezoelectric siren with strobe
- Small footprint
- Water-resistant, meets IP65



SA-96A/L

Hardwired Piezoelectric Siren and Strobe

- 3 piezoelectric sounders
- 10 ultra-bright strobe LED arrays
- Water-resistant, meets IP65



SA-91A/L

Advanced Wired Piezoelectric Siren and Strobe

- Selectable siren time
- Battery backup and charge
- LED indications for low battery, tamper, and AC failure
- Water-resistant, meets IP65



BL-D40

Compact Bell and Strobe Unit for Standalone Controllers



BR-12

Wall and Ceiling Bracket for PIR Detectors



BR-41

Swivel Wall and Ceiling Bracket for PIR Detectors



BR-11

Wall Bracket for PIR Detectors



Other Accessories

Wireless Universal Receivers/Sensors



SA-38
Universal 8-Channel Receiver



SA-01
Wireless Passive Infrared Detector

- Detection range (standard lens) of 14 m (45.9 ft), 140°
- LED indicator/test mode button



SA-01P
Wireless Digital Pet Immune Passive Infrared Detector

- Power Level Discriminator: Special lens combined with a power algorithm ignores small-to medium-sized animals while maintaining a high level of human detection
- Reported events: tamper, low battery, alarm



PYR-2011A
Advanced Wireless Spherical Lens PIR Detector

- Unique spherical Fresnel lens with look-down area, 12 m (39.4 ft) range at 90°



PYR-3011
Wireless Ceiling PIR Motion Detector

- Digital electrical and magnetic protection: distinguishes between electrical interference and real temperature changes
- Detection range: 7-m (23-ft) diameter, 360° @ 2.4-m (7.9-ft) height



SA-K02
Wireless Magnetic Contact Detector

- Case and back tamper detection
- LED indicator

Other Accessories

Wireless Sensors



SA-K25

Dual Input Programmable Wire to RF Transmitter

- Built-in magnetic sensor, with open/close event transmission



SA-19

Wireless Glass Break Detector

- 6 m (20 ft) detection range



SA-61

Wireless Photoelectric Smoke Detector

- Local alarm sounder
- LED indicator for transmissions
- Detector removal tampering and low battery messages



SA-65

Wireless Carbon Monoxide Detector

- Supervised for tamper and low battery sensing
- LED indicators for alarm and RF transmission



SA-30

Wireless Flood Detector



SA-33

Wireless Hand-Held 5-Button Remote Control

- Easy-to-operate, re-programmable emergency button
- Water-resistant, meets IP65
- Thin light bar visual indicator



SA-90

Wireless Piezoelectric Siren & Strobe

- Battery backup and charge
- LED indications for low battery, tamper, and AC failure



Other Accessories

Connectivity & Cabling



MD-W11N/F

Wireless Access Control Door Interface Near Unit / Far Unit



MD-W11BP

Wireless Access Control Interface Power Backup Unit

MD-W11 / MD-W11BP

KEY FEATURES

- Maximum range up to 300 m (985 ft) outdoors
- Overall response time of 500 ms when used with Rosslare's controllers and readers
- Compatible with all of Rosslare's readers and with any third-party units using standard Wiegand format of PIN code and credentials
- Case and wall tamper protection



ACK-10

Wireless Access Control Door Interface Kit

- MD-W11
- MD-W11BP
- Wall Adaptor



MD-N32

RS-232 to Ethernet Gateway



MD-08B

Programming Interface for Smart Card Readers



MD-14U

RS-485 to USB Converter Cable



MD-24U

USB to RS-232 Converter Cable



MD-62U

RS-232 TTL to USB Converter Cable

Other Accessories

Mounting



MP-06

External Mount Metal Enclosure

- Compatible with EX-06, EX-07, EX-04, EX-22 series buttons and MP-H03



MP-16

External Mount Metal Enclosure

- Compatible with EX-16, EX-17 Piezoelectric Buttons and MP-J03



MP-H03

Mounting Plate for PX Series Piezoelectric Push Buttons

- Compatible with PX-13, PX-23, and PX-34 piezoelectric buttons



MP-J03

Mounting Plate for PX Series Piezoelectric Push Buttons

- Compatible with PX-13, PX-23, and PX-34 piezoelectric buttons



MP-M03

Mounting Plate for PX Series Piezoelectric Push Buttons

- Compatible with PX-13, PX-23, and PX-34 piezoelectric buttons

Note: Mounting plate only, the PX Switch is sold separately

Other Accessories

Mounting



MP-K01

Mount Spacer for
AY-K12C /AY-K6255
Readers



MP-Z02

Mount Spacer
for AY-Z12A Reader



MP-G02

Flush mount housing
for AC-G43/44
standalone controllers
and AYC-G54/64
convertible readers



MP-Z64W

Mounting Bracket
for Z64W Mini-PC



Other Accessories

Power Supplies and Batteries



ME-0515M

Multipurpose Power Management Enclosure

- Two isolated output channels: 12 VDC at 2 Amp (4 Amps total)
- Power Management Board with 7AH Lead Acid battery charger
- Universal Input Voltage 100 VAC to 240 VAC 50/60Hz auto select
- Tough metal enclosure featuring Rosslare's PowerLock™ C13 socket



PS-C25TB

Power Management Enclosure with built in Secure Relay I/O Module

- A factory configured kit including the MD-25TB and the ME-0515M



MD-25TB

Secure Relay I/O Module

- Converts any AYC reader into a Secure Standalone Controller
- Proprietary communications protocol
- Security critical IOs all contained within the secure premises



Other Accessories

Power Supplies and Batteries



PS-DC1204

12 VDC / 300 mA –
Wall Adaptor – Switch
Mode Power Supply



PS-DC1512

15 VDC / 800 mA – Wall
Adaptor – Switch Mode
Power Supply



PS-DC2429

24 VDC / 1.2 A –
Wall Adaptor – Switch
Mode Power Supply



PS-DC2465

24 VDC / 2.7 A –
Desktop Type – Switch
Mode Power Supply



PS-30F

DIN Rail Mounted
AC-AC Power Supply

- Input voltage:
230 VAC/50 Hz
- Output: 16 VAC,
1.5 A, 25 VA



PS-AC1625

16 VAC / 2.5 A Plug-In
Power Transformer with
Screw Terminals – (US
Type – Two Flat Blades)



BT-05

Compact 12 V Sealed
Lead Acid Battery



BT-16

Compact 12 V NiMH
Battery



Door Accessories – Exit Buttons & Piezoelectric Switches

Product	Switch type	Sensor/Switch type	Led type	Led control	Button	IP Rating	Operating Voltage (VDC)	Weight
EX-06	Piezo	Analog (Toggle / Pulse)	Ring		Piezo	IP65	10-24	238 g (8.4 oz.)
EX-16	Piezo	Analog (Toggle / Pulse)	Ring		Piezo	IP65	10-24	173 g (6.1 oz.)
EX-07	Piezo	Digital	Square		Piezo	IP65	12-24	277 g (9.8 oz.)
EX-17	Piezo	Digital	Square		Piezo	IP65	12-24	205 g (7.2 oz.)
EX-H22N	Infrared	Motion	Ring	✓	No Touch	IP68	8-30	193.1 g (6.8 oz.)
EX-M22N	Infrared	Motion	Ring	✓	No Touch	IP68	8-30	179.1 g (6.3 oz.)
EX-H22	Infrared	Motion	Ring	✓	No Touch	IP68	8-30	50 g (1.76 oz)
EX-M22	Infrared	Motion	Ring	✓	No Touch	IP68	8-30	55 g (1.94 oz)
EX-H04	Piezo	N.O.	Ring	✓	Piezo	IP65	8-30	50 g (1.76 oz)
EX-M04	Piezo	N.O.	Ring	✓	Piezo	IP65	8-30	55 g (1.94 oz)
EX-01	Mechanical	N.O.			Push		30	15.6 g (0.55 oz)
EX-02	Mechanical	N.O.			Push		30	15.6 g (0.55 oz)
PX-13	Piezo	N.O.			Piezo	IP68	5-30	22 g (0.8 oz)
PX-23	Piezo	N.O.	Dot		Piezo	IP68	5-30	22 g (0.8 oz)
PX-34	Piezo	Toggle	Ring	✓	Piezo	IP68	5-30	22 g (0.8 oz)

Door Accessories – Electromagnetic Locks

Product	Device type	Type	Holding Force (pound)	Door compatibility	Operating Voltage (VDC)	Weight
LK-M03	Maglock	Lock	136kg (300lb)		Dual 12 / 24 VDC	Main 0.63 kg (1.39 lbs) Contact 0.25 kg (0.55 lb)
LK-M06L	Maglock	Lock	272kg (600lb)		Dual 12 / 24 VDC	Main 1.22 kg (2.7 lbs) Contact 0.66 kg (1.45 lbs)
LK-M12L	Maglock	Lock	544kg (1200lb)		Dual 12 / 24 VDC	Main 3.09 kg (6.8 lbs) Contact 1.39 kg (3.06 lbs)
LA-L03 / LA-Z03	Bracket	Bracket for LK-M03		inswing door		145 g (0.32 lb) / 376 g (0.83 lb)
LA-L06 / LA-Z06	Bracket	Bracket for LK-M06L		inswing door		233 g (0.51 lb) / 457g (1 lb)
LA-L12 / LA-Z12	Bracket	Bracket for LK-M12L		inswing door		474 g (1.05 lbs) / 746 g (1.64 lbs)
LA-U03 / LA-U12	Bracket	Bracket for LK-M03/ M06L and M12L		glass door		378 g (0.83 lb) / 550 g (1.21 lbs)

Door Accessories – Wired Sensors & Sounders

Product	Device and Sensor type	Technology and features	Analog/Digital	Hardwire	Field of view / MAX coverage	Tamper	Operating Voltage (VDC)	Weight
PYR-4122	Motion	PIR	A	V		Cover	9-16	90 g (3.2 oz)
PYR-0021	Motion	PIR 14 m (46 ft.)	D	V	H:115°	Cover/Back	9-16	70 g (2.4 oz)
PYR-1021	Motion	PIR 14 m (46 ft.)	D	V	H:115°	Cover/Back	9-16	100 g (3.5 oz)
PYR-2023	Motion	PIR/Microwave	D	V	H:115°	Cover/Back	9-16	130 g (4.6 oz)
PYR-3021	Motion	Ceiling QUAD PIR	D/A	V	360°; 7m (23ft.) dia @ 2.4m (7.8ft) height	Cover/Back	9-16	84 g (2.96 oz)
SA-64-2W	Fire	Photoelectric Smoke		V		Sensor Base/ Back	8.5-30	120 g (4.23 oz)
SA-64-3W	Fire	Photoelectric Smoke		V		Sensor Base/ Back	8.5-30	120 g (4.23 oz)
SA-31	Flood	Flood		V			10-16	28.5 g (1.01 oz.)
SA-21	Vibration	Vibration		V		Cover/Back	8-16	47 g (1.66 oz)
SA-01PW	Motion	DUAL PIR 14m (46 ft.)	D	V	H:88°	Cover	9-16	84.2 g (2.97 oz.)
SH-02	Magnetic	Magnetic		V				10 g (0.36 oz)
SH-12	Magnetic	Magnetic		V				6 g (0.21 oz)
SA-95A/L	Siren	Siren/Strobe mini		V			8-14	200g (70 oz.)
SA-96A/L	Siren	Siren/Strobe large		V			8-14	607 g (21.3 oz)
SA-91A/L	Siren	Siren / Strobe		V		Cover/Back	10-18	650 g (23 oz.)
BL-D40	Bell	Siren/Bell/Strobe		V			12-24	120 g (4.2 oz)



Accessories

Other Accessories – Wireless receivers & Sensors

Product	Device and Sensor type	Technology and features	Frequency (MHz)	Operating Voltage	Weight
SA-38	Wireless receiver	Universal 8-Channel (32 devices) RF Receiver	418 / 868	12VDC	320 g (0.70 lbs)

Product	Device and Sensor type	Technology and features	Analog/Digital	Field of view / MAX coverage	Tamper	Battery type/life years	Weight
SA-01	Motion	PIR	D	14 x 14 m (46 x 46 ft), 88°	Cover/Back	CR123 /3y	84.2 g (3.0 oz.)
SA-01P	Motion	PIR	D	14 x 14 m (46 x 46 ft), 88°	Cover/Back	CR123/3y	84.2g (3.0 oz.)
PYR-2011A	Motion	PIR	D/A	H:90°; 12x12m (39.5 x 39.5ft)	Cover/Back	CR123 /3y	123 g (4.3 oz)
PYR-3011	Motion	Ceiling QUAD PIR	D/A	360°; 7m (23ft.) dia @ 2.4m (7.87ft.) height	Cover/Back	CR123 /3y	106 g (3.8 oz)
SA-K02	Magnetic	Magnetic	A		Cover/Back	CR123 /3y	37 g (1.3 oz)
SA-K25	Wire to RF transmitter	Dual Input Programable			Cover/Back	CR123 /3y	63 g (2.22 oz)
SA-19	Glass Break	Glass Break	D		Cover/Back	CR123 /4.5-10y	150 g (0.35 lb)
SA-61	Fire	Photoelectric Smoke	D		Sensor base/Back	CR123 /3y	120 g (4.23 oz)
SA-65	Fire	Carbon Monoxide	D		Sensor base/Back	CR123 /1.5y	155 g (5.5 oz)
SA-30	Flood	Flood				CR123 /3y	28.5 g (1.01 oz.)
SA-90	Siren	Siren			Cover/Back	15V DC	670 g (24 oz.)
SA-33	Remote	5 button remote control	D			CR2450/3y	16 g (0.56 oz.)



Accessories

Other Accessories – Connectivity & Cabling & Power Supplies

Product	Description	Conversion from/to Reader programmer	Operating Voltage	Weight
MD-08B	Programming Interface for Smart Card Readers	RS232	12-15	75 g (2.6 oz.)
Converter and communication cables				
MD-N32	RS-232 to Ethernet Gateway	RS232/TCPIP	10-16	92 g (3.25 oz)
MD-W11	Wireless Access Control Door Interface	Wiegand/RF/Wiegand	15-24	155 g (5.5 oz)
MD-14U	RS-485 to USB Converter Cable	RS-485/USB		75g
MD-24U	RS-232 to USB Converter Cable	RS-232/USB		88g
MD-62U	RS-232 TTL to USB Converter Cable	TTL/USB		87g
Power supply				
MD-25TB	Secure Relay I/O Module		12VDC	0.155 kg (0.34 lb)
ME-0515M	Multipurpose Power Management Enclosure		12VDC	2.1 kg (4.6 lb)
PS-C25TB	Power Management Enclosure with built in Secure Relay I/O Module		110 VAC to 240 VAC 50/60Hz auto select	2.21 kg (4.87 lb)
PS-30F	AC-DC Adapter		230VAC/14VDC	
PS-DC1204	AC-DC Adapter		100-240VAC 50/60Hz/ 12VDC 300mA	81.7g (2.88oz)
PS-DC1512	AC-DC Adapter		100-240VAC 50/60Hz/ 15VDC 800mA	106.8g (3.77oz)
PS-DC2429	AC-DC Adapter		100-240VAC 50/60Hz/ 24VDC 1.2A	182g (6.42oz)
PS-DC2465	AC-DC Adapter		100-240VAC 50/60Hz/ 24VDC 2.7A	392.7g (13.85oz)
PS-AC1625	AC-AC Adapter		220VAC/16VAC 1.5A	757g (1.67lb)



Other Accessories – Mounting

Mounting	Description	Compatible product
MP-06	Wall flush mount box "H" series	EX-06, EX-07, EX-H04, EX-H22, EX-H22N, MP-H03
MP-16	Wall flush mount box "J" series	EX-16, EX-17, MP-J03
MP-G02	Wall flush mount box "G" series	AC-G43, AC-G44, AYC-G54, AYC-G60, AYC-G64
MP-H03	Mounting plate for PX series US Gang	PX-13, PX-23, PX-34
MP-J03	Mounting plate for PX series mullion	PX-13, PX-23, PX-34
MP-M03	Mounting plate for PX series UK Gang	PX-13, PX-23, PX-34
MP-K01	Mounting spacer "K" series	AY-K2B, AY-K5B, AY-K12C, AY-K25B, AY-K6255
MP-Z02	Mounting spacer	AY-Z12A
MP-Z64W	Mini PC mounting bracket black galvanized steel	PC-Z64W
BR-12	Wall and Ceiling Bracket for PIR Detectors	SA-01, PYR-4122
BR-41	Swivel Wall and Ceiling Bracket for PIR Detectors	PYR-0021, PYR-1021, PYR-2011, PYR-2023
BR-11	Wall Bracket for PIR Detectors	SA-01PW



Guard Patrol



The Rosslare DigiTool® guard patrol system integrates a complete range of high performance private- and public-sector products specifically designed for patrol and data acquisition applications, enabling more effective security staff monitoring and supervision.



GC-01

Data Acquisition Reader

- Rugged and waterproof, dust resistant design
- Internal rechargeable battery for 6-month use or 300,000 readings



GC-02

Data Acquisition Reader Base / Charger

- RS-232 docking station for data upload to PC and reader battery charger
- 3-colored LED and buzzer indications



GC-03

Data Acquisition Reader Charger

- Reader docking station functions as a battery charger
- 2-colored LED



GA-01

iButton Location Tag

- Rugged and waterproof



Guard Patrol

DigiTool® System



GA-02

Event Wallet

- Portable wallet for special event reporting during guard patrol
- 10 event iButtons



MD-24U

USB to RS-232 Converter Cable



GA-06

Leather Holster for GC-01



GS-01

DigiTool® Reports Lite™ PC Software



Guard Patrol

Kits



GC-K01

DigiTool® Starter Kit

- Includes: GC-01, GC-02, GA-02, GA-01B, GA-06, GS-01



GC-K03

DigiTool® Guard Upgrade Kit

- Includes: GC-01, GC-03, GA-02, GA-06, PS-DC1512



GC-K04

DigiTool® Guard Upgrade Kit

- Includes: GC-01, GC-02, PS-DC1512



Product Selection Guide



Product Selection Guide

Software	AxTrax Platform	Server	AxTraxNG™	6
		Modules	AxTime™	7
	VMS Platform	Server	ViTrax™	7
	Mobile Apps	BLE-Admin, BLE-ID		21,23,33,41
Controllers	Networked Control Panels	Control Panels	AC-825IP, AC-215-B/215IP-B, AC-225-B/225IP-B, AC-425-B/425IP-B	10-11
		Expansion Boards	R-805, D-805, S-805, P-805, MD-D02B, MD-D04B, MD-IO84B	10-11
		Enclosures	ME-1015, ME-1515	12
		Turnkey Kits	MS825IPA-KCS, MS225IP-KCS, PC-Z64W	12
	Small Access Controllers	Entry-Level	AC-115 & AS-115, AC-015 & AS-015, AC-020	13
		Standalone	AC-Q41HB/HP/SB, AC-Q42HB/HP/SB, AC-Q44, AC-T43, AC-S43, AC-F43, AC-F44, AC-G43, AC-G44, AC-B32, AC-D32	14-16
Readers	13.56 MHz	Open to Secure® - O2S®	AY-H6270B, AY-H6280B, AY-H6370B, AY-H6380B, AY-G6270B, AY-G6280B, AY-G6370B, AY-G6380B, DR-6280	20
		CSN SMART™	AY-H6255BT, AY-H6355BT	21
		CSN SELECT™	AY-M6255, AY-K6255, AY-H6255, AY-L6255, AY-R6255, AY-Q6255, AYC-M6355, AYC-H6355, AYC-Q6355, DR-6255	22-23
		MIFARE® Classic CSN	AY-M5B, AY-H5B, AY-L5B, AY-K5B, AY-T6350, AY-M25B, AY-H25B, AY-L25B, AY-K25B	24-25
		MIFARE® Sector	AY-M26, AY-W6260, AY-W6360, AY-Q6260, AY-Q6360	26
	125 KHz	PROX and goPROX	AY-K12C, AY-L12C, AY-H12C, AY-M12C, AY-Q12C, AYC-G60, AYC-F60, AYC-G64, AYC-F64, AY-M2B, AY-H2B, AY-L2B, AY-K2B, AYC-E65B/BG/BB, AYC-E60N/B, AYC-T65N/B, AYC-Q64B, AYC-Q60, AY-V12B, AY-V64B, AY-Z12A, DR-12C	27-31
			MD-12C, MD-12W	31
		PIN Code	AYC-G54, AYC-F54, AYC-E55, AYC-Q54B, AY-T55, AY-S55, AY-D09M	32
		UHF Long Range	AY-U915BT, AY-U920BT, DR-U955BT, AY-L23, SA-23-B2, SA-23-B4	33-34
	Biometric Terminals		Bio8000	AY-B8520, AY-B8550, AY-B8620, AY-B8650, DR-B8000, Bio8000 SW
		Bio9000	AY-B9120BT, AY-B9150BT, AY-B9250BT, AY-B9350, DR-B9000, Bio9000 SW	41-42
13.56 MHz		Legacy Biometric	AY-B1660A, AY-B2660A, AYC-B7661A, CP-R26A, AS-B01 SW	43

Product Selection Guide

Credentials		O2S - MIFARE Plus & Desfire EV1		46	
		NFC and BLE-ID for Mobile Devices		46	
		MIFARE Classic Credentials		46	
		UHF Alien Higgs-3 Credentials		46	
		EM and Temic Credentials		46	
Accessories	Door Accessories	EX (REX) Buttons	EX-06, EX-16, EX-07, EX-17, EX-H04, EX-M04, EX-H22N, EX-M22N, EX-H22, EX-M22, EX-01, EX-02	52-53	
		PX Switches	PX-13, PX-23, PX-34	54	
		Electromagnetic Locks	LK-M12L, LK-M06L, LK-M03, LA-L12, LA-Z12, LA-L06, LA-Z06, LA-L03, LA-Z03, LA-U12, LA-U03	55	
		Wired Sensors	SA-01PW, PYR-4122, PYR-0021, PYR-1021, PYR-2023, PYR-3021, SA-64-2W, SA-64-3W, SH-02, SH-12, SA-31, SA-21, SA-95A/L, SA-96A/L, SA-91A/L, BL-D40, BR-12, BR-41, BR-11	56-58	
	Other Accessories	Wireless Universal Receivers/Sensors	SA-38, SA-01, SA-01P, PYR-2011A, PYR-3011, SA-K02, SA-K25, SA-19, SA-61, SA-65, SA-30, SA-33, SA-90	59-60	
		Connectivity & Cabling	MD-W11N/F, MD-W11BP, ACK-10, MD-N32, MD-08B, MD-14U, MD-24U, MD-62U	61	
		Mounting	MP-06, MP-16, MP-H03, MP-J03, MP-M03, MP-K01, MP-Z02, MP-G02, MP-Z64W	62-63	
		Power Supplies and Batteries	ME-0515M, PS-C25TB, MD-25TB, PS-DC1204, PS-DC1512, PS-DC2429, PS-DC2465, PS-30F, PS-AC1625, BT-05, BT-16,	64-65	
	Guard Patrol	DigiTool® System		GC-01, GC-02, GC-03, GA-01, GA-02, GA-06, GS-01, MD-24U	72-73
		Kits		GC-K01, GC-K03, GC-K04	74

* This catalog contains items that may not be available in your region.
Contact your regional sales representative/Rosslare's distribution partner to check availability.

Rosslare Global Offices

APAC, MENA (HEADQUARTERS)

Rosslare Enterprises Ltd.

Sales: sales.apac@rosslaresecurity.com
Support: support.apac@rosslaresecurity.com

CHINA

Rosslare Electronics (Shenzhen) Ltd.

Sales: sales.cn@rosslaresecurity.com
Support: support.cn@rosslaresecurity.com

EUROPE / ISRAEL

Rosslare Israel Ltd

Sales: sales.eu@rosslaresecurity.com
Support: support.eu@rosslaresecurity.com

INDIA

Rosslare Electronics India Pvt Ltd.

Sales email: sales.in@rosslaresecurity.com
Support email: support.in@rosslaresecurity.com

LATIN AMERICA

Rosslare Latin America


Sales: sales.la@rosslaresecurity.com
Support: support.la@rosslaresecurity.com

NORTH AMERICA & CANADA

Rosslare Security Products, Inc.

Sales: sales.na@rosslaresecurity.com
Support: support.na@rosslaresecurity.com

Disclaimer: The data contained within Rosslare's catalogue is intended to provide only general information about products available for purchase from Rosslare Enterprises Limited and its associated companies ("Rosslare"). Reasonable efforts have been made to ensure the accuracy of this information. However, it might contain typographic errors, inaccuracies, or omissions that may relate to product descriptions, visual pictures, specifications, and other details. All technical specifications weights, measures and colors shown, are best approximations. Rosslare can not be held responsible and assumes no legal liability for the accuracy or completeness of the information provided. Rosslare reserves the right to change, delete, or otherwise modify the information, which is represented, at any time, without any prior notice.

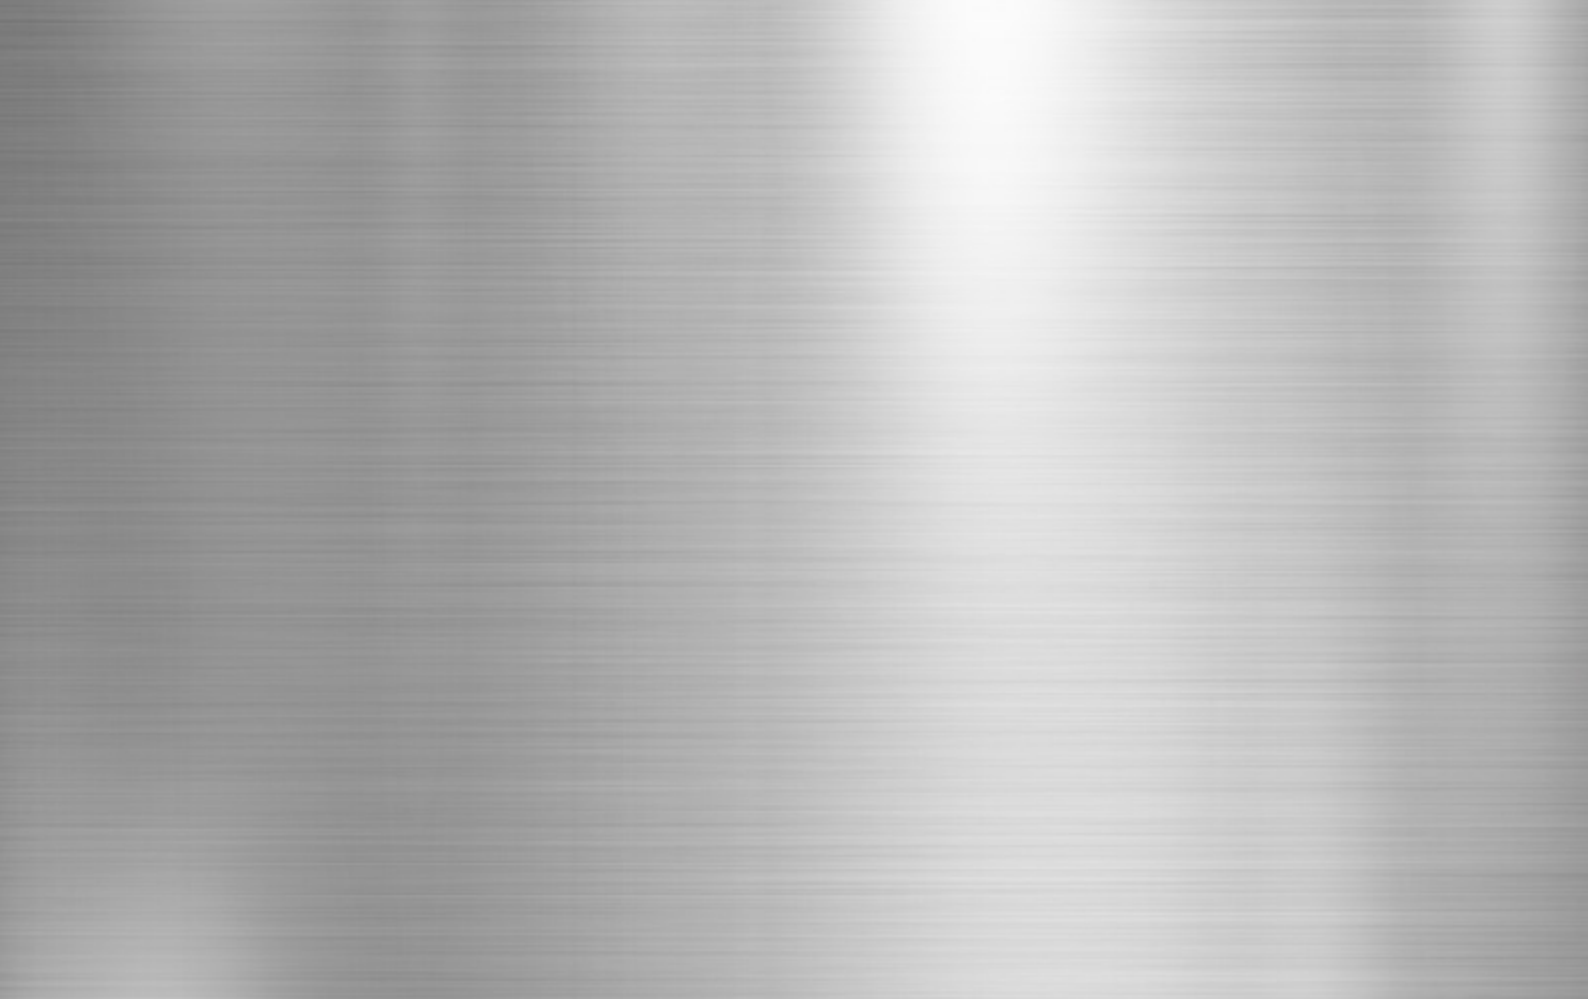

www.rosslaresecurity.com