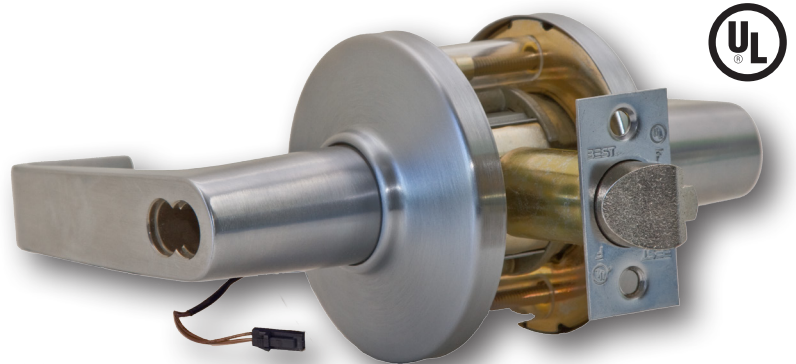- *UL LISTED*
- *GRADE 1*
- *12 OR 24 VDC*
- *LOW CURRENT DRAW*
- *3-YEAR WARRANTY*

The Command Access electrified version of the **Best 93K series cylindrical** lock line allows for remote keyless access and egress control for heavy use applications where security and safety is critical. These locks may be purchased as complete locks or as modifications only (add MD prefix for modification only of customers' CL93K Series). Along with the styles and finishes listed, we offer multiple functions and voltages to meet your requirements. Common applications include stairwell doors, lobby entrances, computer rooms, classrooms, interior and exterior doors.

MODELS AVAILABLE

CL93DEL - storeroom:
(fail safe)

Outside lever locked (EL) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.

CL93DEU - storeroom:
(fail secure)

Outside lever unlocked (EU) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.

TRIM AVAILABLE
14C, 14D, 15C, 15D

FINISHES AVAILABLE
613, 625 & 626

FEATURES:
- Continuous duty solenoids allow for "continuously on" applications such as Fail Safe or an unlock cycle
- Plug-in bridge rectifier that allows for an AC or DC power source
- Low current draw

OPTIONS:
- Available Fail Safe (Electrically Locked) or Fail Secure (Electrically Unlocked)
- Voltage options - 12V or 24V (AC/DC)
- REX - Request to Exit or AE switch available (on all functions)
- CRU2 - Current Reduction Unit to improve solenoid life in "continuously on" applications

SPECIFICATIONS:
- Operating Voltage - 12 or 24VAC/DC (+or- 10%) (must specify 12 or 24 volts when ordering)
- Amperage - 12V = 250 mA / 24V = 150 mA   • Power consumption - 3 watts
- Solenoid coil resistance - 12V = 49 Ω / 24V = 159 Ω

U.S. Customer Support
1-888-622-2377

Visit our website for more details
www.CommandAccess.com

Canada Customer Support
1-855-823-3002