




705 Emmett Street • Bristol, CT 06011-2728
 Phone:(860)582-4761 • Fax:(860)585-0338

**SERIES #2268xDSE
 ELECTROMAGNETIC LOCK
 WIRING INSTRUCTIONS**


OPERATING VOLTAGE

The 2268xDSE maglock is configured to operate on 24VDC input power.

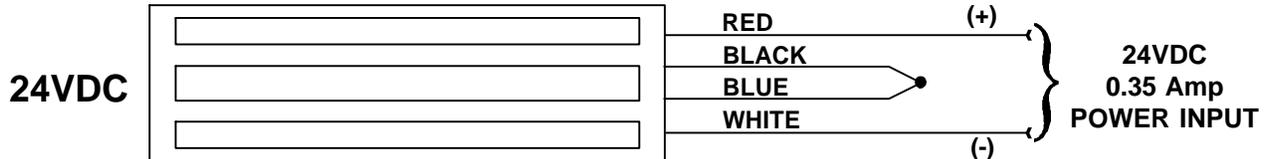

DYNASTAT FORCE SENSOR (DYNST) WIRING

The 2268xDSE Dynastat Force Sensor provides a SPDT set of dry contacts to signal whether an efficient magnetic bond has occurred between the mating surfaces of the magnetic lock and armature for remote monitoring purposes (i.e. - door 'locked' or door 'unlocked'). Typical system connections are shown below.

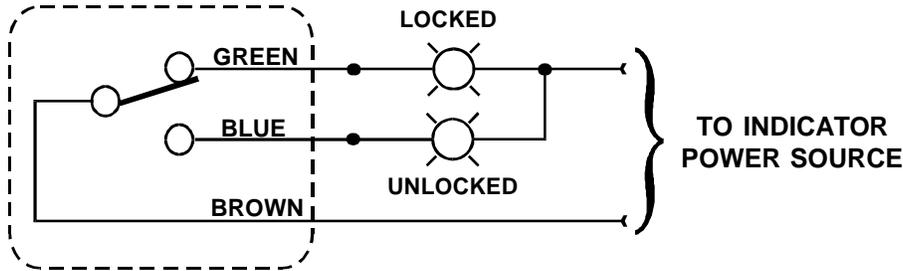

NOTE: Indicators are not included.
 Dynastat contact rating - 0.25 Amp @ 24VAC/VDC

2268xDSE GENERAL SPECIFICATIONS

- OPERATING VOLTAGE:** 24VDC
- POWER CONSUMPTION:** 0.35 Amp @ 24 Volts
- SURGE SUPPRESSION:** Built-in
- HOLDING FORCE:** 1200 Lbs.
- COIL RESISTANCE:** 68 Ohms (+-10%) White / Red
- TERMINATIONS:** 12" Long Color-Coded Wire Leads