



introduction

Yale® 2700 series architectural door closers are ideal for commercial applications where ease of use, installation and aesthetics are required at an economical price.

The 2700 series features rugged construction, adjustments for backcheck, closing and latch speed, rack and pinion operation and a variety of arm options.

features

- Adjustable spring sizes 1 through 6
- Non-handed
- Aluminum
- Tri-packed: regular, parallel or top jamb mounting
- Adjustable backcheck valve
- Adjustable closing speed valve
- Adjustable latching speed valve
- Full plastic cover
- Spring power adjustment - adjust with adjustable wrench
- Hold-open and heavy-duty arms available
- Standard fasteners: (included with tri-packed, NHO only)
 - Self-drilling screws (6), Cover screws (2), Slide arm screws (2), Machine screws (6), Pinion screw (1), Allen wrench (1)
- Optional fasteners:
 - Sleeve nuts, Through-bolts and grommet nuts

certifications

- Certified for ANSI/BHMA A156.4 Grade 1
- UL and cUL listed. This includes compliance to UL10C.
- Meets requirements for Americans with Disabilities Act (ADA) and ANSI/BHMA A117.1
- 10-year limited warranty
- Meets requirements of the Buy American Act

contents

Introduction 2

Features 2

Certifications 2

Door Closing Latching Cycle 2

Finishes 2

Applications 3

Parts 4


Accessories 5

How To Order 6

finishes

ANSI/BHMA Code	Finish Description
689	Aluminum Painted
690	Dark Bronze Painted

door closing latching cycle

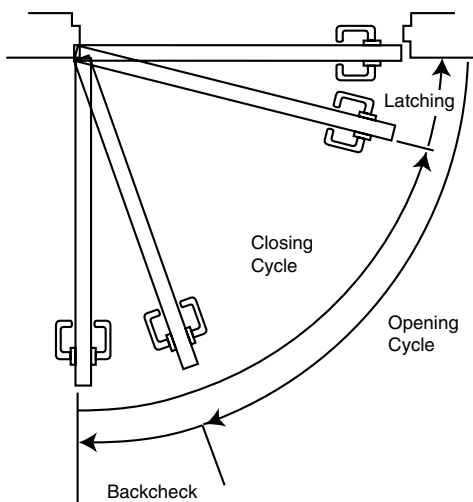

arms

Non-Hold Open

Self-closes door every time door is opened. Auxiliary stop (by others) required except when using the Holder/Stop arm.


Hold Open

Achieved by means of friction or ball and detent/ roller. Friction hold open has a range of 90° to 180° using template location and mechanical adjustment. Ball and detent or roller hold open is effective in a range of 85° to 110°.

Hold open arm door closers are not permitted to be used on fire door assemblies.

applications


regular arm

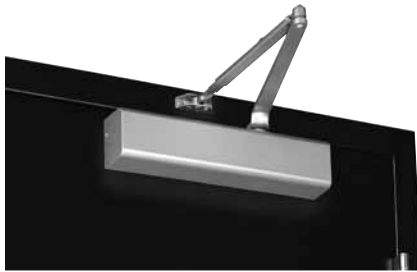

Non-hold open arm shown, hold open application available.

This is the only pull side application where a double lever arm is used. It is the most power-efficient application for a door closer. Sufficient frame, door and/or ceiling clearance must be considered. Since the arm assembly projects directly out from the frame, this application may present an aesthetics issue or be prone to vandalism.


top jamb

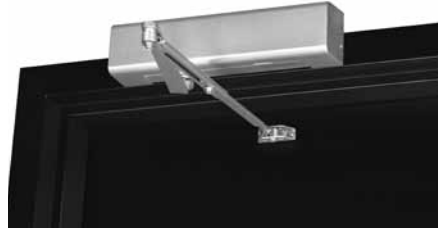

Non-hold open arm shown, hold open application available.

For efficiency reasons this application provides the best alternative to the regular arm application. There must be sufficient frame face and/or ceiling clearance for this application. It requires a top rail on the door of just 2-1/4" (57mm). This application provides the best door control for doors in exterior walls that swing out of a building. The entire door closer and arm assembly project from the frame, similar to the regular arm application, where matters of appearance and malicious abuse can be of concern. Consideration must be given to depth of reveal.


parallel arm

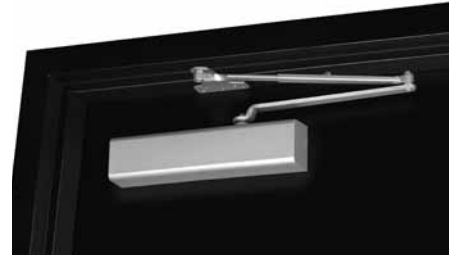


Non-hold open arm shown, hold open application available.

This application provides the most appealing design appearance for a surface-mounted door closer having a double lever arm. This also makes it beneficial in vandalism-prone areas. It is on the push side of the door and the arm assembly extends almost parallel to the door. In the closed position, there is very little or no hardware projecting beyond the frame face in most situations. Due to the geometry of the arm it is approximately 25% less power-efficient than a regular arm application. The entire closer and arm assembly are mounted below the frame stop. Top rail clearance dimensions will vary based on the type of cover used.

holder/stop arm

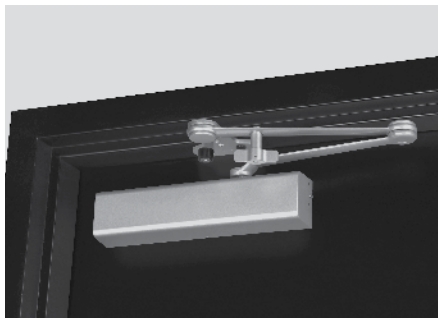

Hold open arm shown

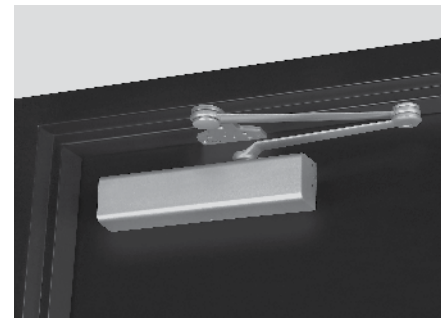

Non-hold open arm shown without stop

This arm incorporates a stop at the arm's soffit plate to dead stop the door at a predetermined degree of door swing between 85° and 110°, in 5° increments. Prior to dead stop the door closer's backcheck feature slows the door speed to reduce the impact of the stop action.

The Holder/Stop arm is intended for use where an auxiliary door stop cannot be utilized and no more than moderate abuse is anticipated. Available with or without hold open. (Hold open strength is adjustable.)

The stop is removable to allow for additional applications where auxiliary door stops are installed.




model/part numbers

Complete Units	
Model Number	Description
2701	Non-Hold Open Tri-Packed, Adjustable Size 1-6
2711	Hold Open Tri-Packed, Adjustable Size 1-6
2721	Heavy-Duty Non-Hold Open Parallel Arm with Removable Stop, Adjustable Size 1-6
2721T	Heavy-Duty Hold Open Parallel Arm with Thumb-turn and Removable Stop, Adjustable Size 1-6

Note: for heavy-duty parallel rigid arm applications, specify 2721 or 2721T, stop is removable.

See page 6 for more how to order info.

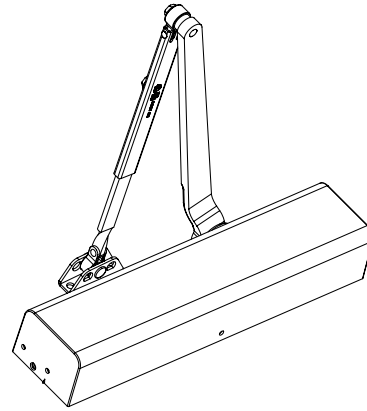

Miscellaneous Parts*	
Part Number	Description
2700COV	Full Plastic Cover
2700SP	Screw pack

*Specify finish when ordering.

Optional Fasteners	
Part Number	Description
SN-134	Sleeve Nuts
TBGN134-38	Through-Bolts & Grommet Nuts

Note: Sleeve nuts furnished standard with parallel rigid and holder/stop arms.

Cover Dimensions		
Width	Length	Projection
2-7/8" (73mm)	13" (330mm)	2-1/8" (54mm)

accessories


parallel rigid and holder/stop arms

BRACKETS FOR NON-HOLD OPEN ARMS & HOLD OPEN ARMS		
		<p>Flush Rabbeted Transom - #293L Angle Bracket: For use where flush transom conditions prevent mounting of the standard soffit plate. This bracket is used in combination with the standard soffit plate. Not for use with heavy-duty arms.</p>
CLOSER MOUNTING PLATES		
		<p>Narrow Top Rail - #3148 Drop Plate: For use where a narrow top rail prevents the closer from being mounted directly to the door surface. This drop plate can be used to mount a closer on a top rail as narrow as 2-7/16" (62mm) in height.</p>
		<p>Exposed Back/Narrow Top Rail - #3158 Molded Full Cover Drop Plate: For use on doors with glass lights where a closer with molded full cover is installed and the back of the closer is exposed. This covers the back of the installation and gives a pleasing appearance from the reverse side.</p>

Note: All measurements are Inches/mm.



how to order

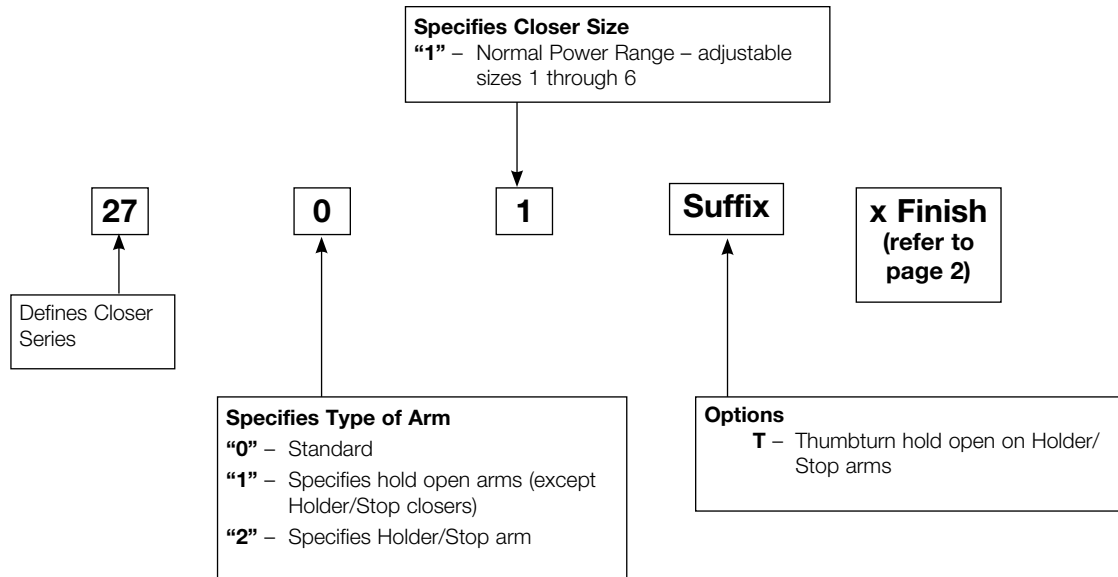

Notes:

- For heavy-duty parallel rigid arm applications, specify 2721 or 2721T, stop is removable.
- Warranty becomes void if door closer is installed on the exterior side of a door in the exterior wall of a building.
- It is strongly recommended, and required on fire door assemblies, that doors having a door closer be hung on ball bearing or anti-friction hinges or pivots; unless an alternate method is identified in the door manufacturer's listing.
- Failure to use the correct type and size fasteners may void factory warranty.
- Fasteners for fire/smoke door assemblies must conform to NFPA 80. In some applications additional fasteners may be mandated by NFPA 80 that are not shipped with standard Yale® product, such as sleeve-nuts/ sex-nuts or through-bolts and grommet nuts.
- Contact factory if door weight exceeds 250 lbs.