

# 7501 Electric Strike Complete Pac

*Works with cylindrical locksets  
up to a 3/4" throw latchbolt*

Also available in  
a Complete One  
Box Solution



## The Grade 1, fire rated, preload solution.

The 7501 Series Electric Strike is ideal for fire rated applications with preload conditions caused by a warped or misaligned door, weather stripping, a smoke seal or any other condition that could cause door bind. The heavy duty stainless steel construction provides the strength and durability required to accommodate fire rated latchbolts up to 3/4" throw.

## Features

### Standard Features

- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1 million cycles
- Field selectable fail safe/fail secure
- Accommodates preload (up to 15lbs: fail secure only)
- Non-handed
- Internally mounted solenoid
- Strike body depth 1-11/16" [42.86mm]
- Plug-in connector
- Trim enhancer
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

### Optional Features

- LBM Latchbolt monitor

### Accessories

- 2001M Plug-in bridge rectifier
- 2004M ElectroLynx® adapter
- 2005M3 SMART Pac® III
- 2006M Plug-in buzzer
- 150 Strike latch guard
- HESCUT-MTK Metal Template Kit



Grade 1



SecuriCare  
Warranty



Cylindrical  
Locksets



Field Selectable  
(Fail secure  
/Fail safe)



Dual Voltage  
12/24



Fire Rated



Preload



Burglary  
Rated

hes.

ASSA ABLOY

## 7501 Electric Strike Complete Pac

## Specifications

## Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed
- UL 10C fire rated, 3-hour (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- UL 294 listed


## Frame Application

- Metal

## Electrical (DC Continuous Duty)

- Dual voltage 12/24 VDC
- 450 mA at 12 VDC/250 mA at 24 VDC

## Dimensions

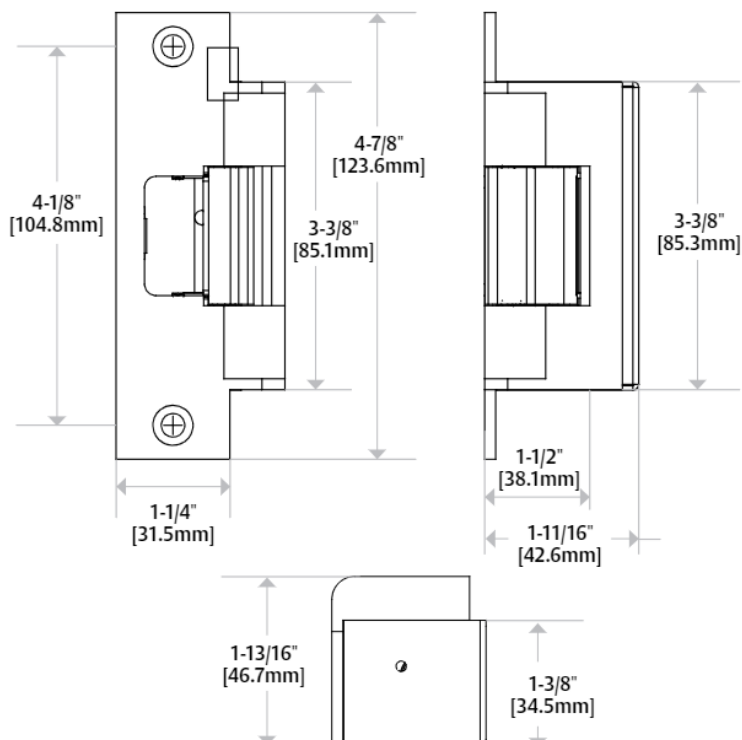

## OPERATION



After releasing the latchbolt, the keeper returns to the locked position.



4-7/8" x 1-1/4" x  
1-11/16"  
[123.8mm x 31.75mm  
x 42.9mm]

## 7501

For use with: Cylindrical locksets up to a 3/4" [19mm] throw

ANSI/BHMA Numbers: E09321, E09322, E09323



## How to Order

SERIES	FINISH	OPTION(S)
<b>7501</b>	<b>- 630</b>	<b>- LBM</b>
7501 Universal Electric Strike; includes faceplate for cylindrical locksets	605 Bright Brass	(blank) No Monitor
	606 Satin Brass	LBM Latchbolt Monitor
	612 Satin Bronze	
	613 Bronze Toned	
	629 Bright Stainless Steel	
	630 Satin Stainless Steel	

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.