


7800 and 8200 Series Mortise Lock

Used with VN1 Escutcheon Trim and
V Series Indicators

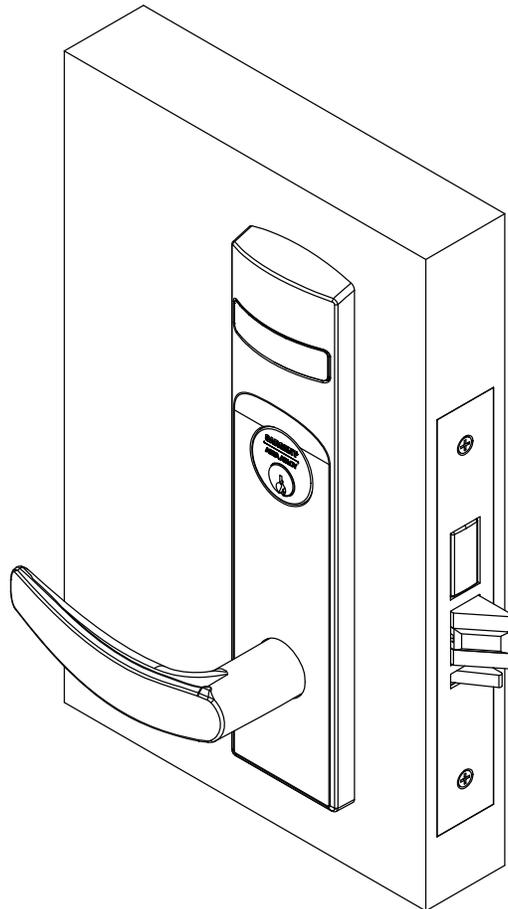

⚠ WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

7800 and 8200 Series Mortise Locks

Used with VN1 Escutcheon Trim and V Series Indicators

SARGENT

ASSA ABLOY

Installation Instructions

TOC	Table of Contents
1	Tools Required2
2	Indicator Variants.....3
3	Lock set configuration3
4	Rehanding Indicator (if required).....3
5	Installation4
a	Prepare Door.....4
b	Install Lock4
c	Install Outside Trim.....4
d	Install Inside Trim.....4
e	Install Cylinder5
f	Install Outside Front5
g	Perform Functional Check5
6	Indicator Parts List.....6

1 Tools Required



#2 & #3 Phillips head screwdrivers



Flat blade screwdriver



1/8" Allen Wrench



3/8" Drill bit



T-20 Torx Screw with Tamper Pin Driver

7800 and 8200 Series Mortise Locks

Used with VN1 Escutcheon Trim and V Series Indicators

SARGENT

ASSA ABLOY

Installation Instructions

2

Indicator Variants

Depending on function and option ordered, indicators are provided in the following variations, these instructions detail how to install with cylinder, however other variations follow similar instructions. (Figure 1)

- Contact factory with questions.

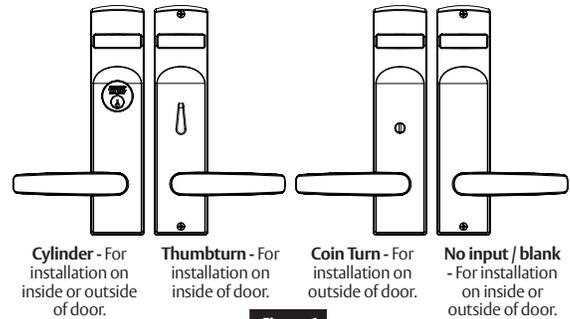


Figure 1

3

Lock set configuration

To set function of multi-function lock or to re-hand, see instructions on lock body.

4

Rehanding Indicator (if required)

Verify hand and bevel of door. (Figure 2)

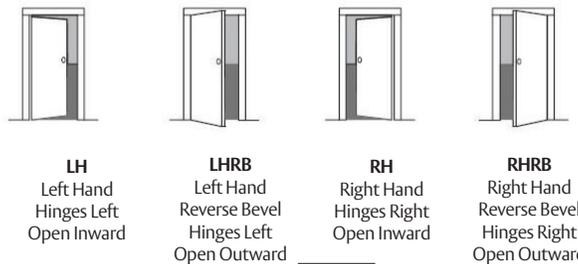


Figure 2

Note:

Stand outside of locked door when determining door hand.

Next, verify inside and/or outside indicators are handed correctly, using Spindle Cam Position chart. (Figure 3)

If they are handed correctly, skip to Step 5 "Prepare Door".


If they are not handed correctly:

1. Remove indicator back plate by pulling out from top slot, then remove spindle cam from assembly. (Figure 4)
2. Position spindle cam in correct direction for door hand. (Figure 3)

Important:

- For thumbturn indicators, make sure thumbturn is positioned in 12 o'clock direction as shown. (Figure 5)
3. Slide spindle cam post into the correct slot of the display slide. (Figure 4)
 4. Re-seat back plate into original position.
 5. Return indicator to vacant/unlocked position for installation.

Spindle Cam Position for Locks with Deadbolt (*and 56 function)

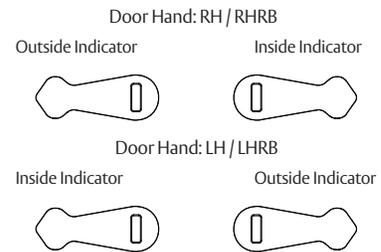

Spindle Cam Position for Locks without Deadbolt (*except 56 function)

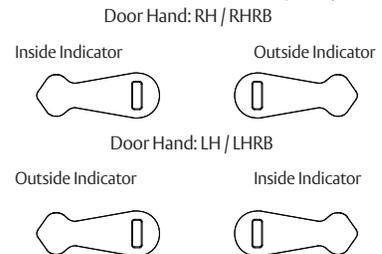


Figure 3

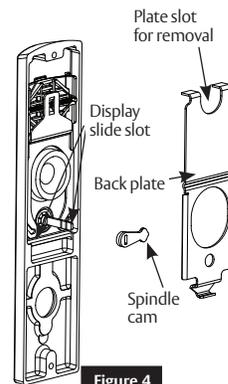


Figure 4

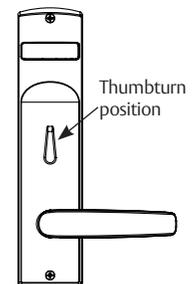


Figure 5

7800 and 8200 Series Mortise Locks

Used with VN1 Escutcheon Trim and V Series Indicators

SARGENT

ASSA ABLOY

Installation Instructions

5

Installation

a

Prepare Door

Prepare door for function holes, size, and location according to A8258 door marker template, if not already prepped.

b

Install Lock

1. Verify strike location according to template. Clean out door pocket and door edge of debris.
2. Ensure handing of lock and door match. Slide lock into door. (Figure 6)
3. Temporarily hand tighten two (2) lock screws (#12 x 1-1/4" wood screws, or #12-24x 1/2" machine screws).

Note:

Keep door open until installation is complete.

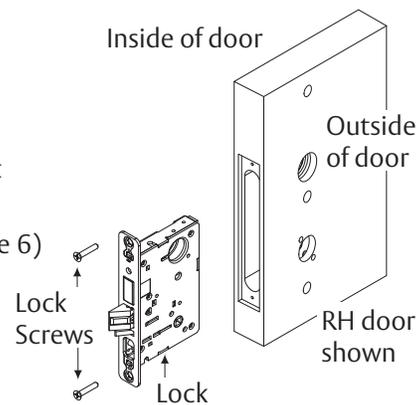


Figure 6

c

Install Outside Trim

1. Verify lock is in unlocked state (control hub slot should be vertical). Also, verify indicator is in vacant/unlocked position.
2. Align trim posts with diagonal holes in door, be sure lever is horizontal. Slide outside escutcheon assembly through lock body from outside door face. (Figure 7)

Note:

If indicator is used on outside, align indicator spindle with control hub.

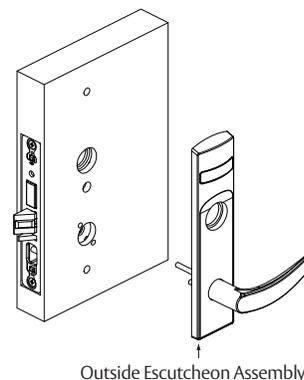


Figure 7

d

Install Inside Trim

1. Slide spindle into lockbody hub. (Figure 8)
2. Slide adapter and plate assembly over spindle.
3. Secure with two (2) #8-32 x 5/8" screws.
4. For Studio Collection levers only, use trim bushing over adapter plate.
5. Verify lock is in unlocked state (turn outside lever to ensure). Also, Verify indicator is in vacant/unlocked position.

Notes:

- If indicator is used on inside, align indicator spindle with control hub.
7. Through-bolt inside escutcheon to outside escutcheon with two (2) #8-32 x 2-1/4" screws.
 8. Install inside lever on adapter plate. Secure with set screw.

Note:

Screw heads should be visible on inside escutcheon.

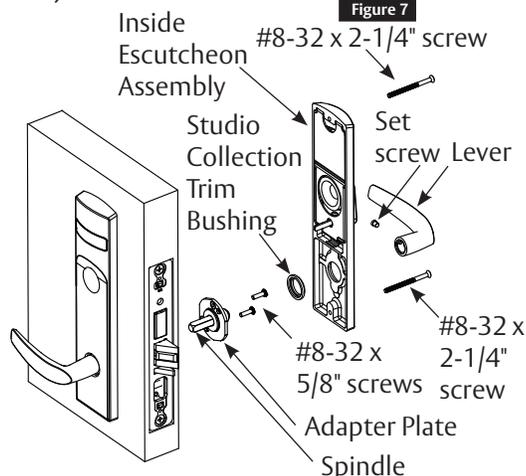


Figure 8

7800 and 8200 Series Mortise Locks

Used with VN1 Escutcheon Trim and V Series Indicators

SARGENT

ASSA ABLOY

Installation Instructions

5

Installation (cont.)

e

Install Cylinder

1. Thread cylinder into lock until flush with escutcheon surface. (Figure 9)
 - Pull key slightly out of cylinder to help thread into lock body.
2. Tighten cylinder clamp screw with #1 Phillips screwdriver.
 - Check operation and adjust cylinder if necessary.

Notes:

- SARGENT logo must be horizontal and on top. (Figure 10)
- If double cylinder function is used, repeat steps 1 and 2 for second cylinder.
- Removable Core or Interchangeable Core cylinders require a control key (key stamped with C) to remove and install the core. This is not provided standard; it must be requested separately. If requesting 1-bitted control key, specify 113511 cut.

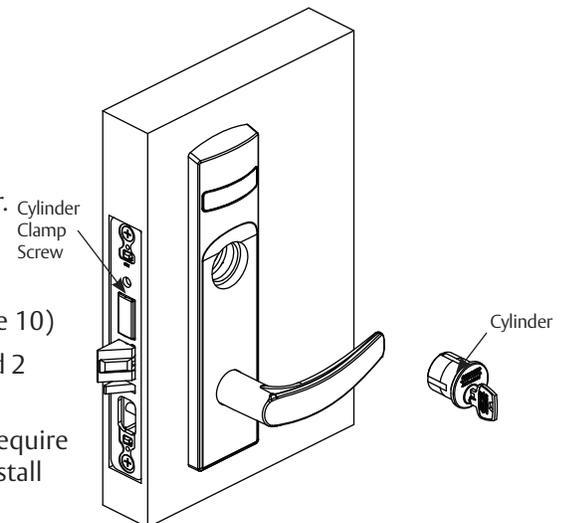


Figure 9

Key and cylinder must be rotated as shown.




Figure 10

f

Install Outside Front

1. Tighten the two (2) lock screws completely. (Figure 11)
2. Attach outside front with two (2) flat head screws #8-32 x 1/4".

g

Perform Functional Check

DO NOT FORCE if resistance is encountered during functional check. Refer back to Rehanding Indicator (if required) section to ensure correct handing. Rehand if necessary.

1. Insert key into cylinder (if present) and rotate:
 - Ensure there is no friction against lock case or any other obstructions.
2. Check key retracts latch:
 - Key should rotate freely.
3. Throw deadbolt (if present):
 - Check key retracts both deadbolt and latch.
4. Test levers:
 - Confirm latch and deadbolt (if installed) retract.
5. Verify indicator displays correct status when locked and unlocked.

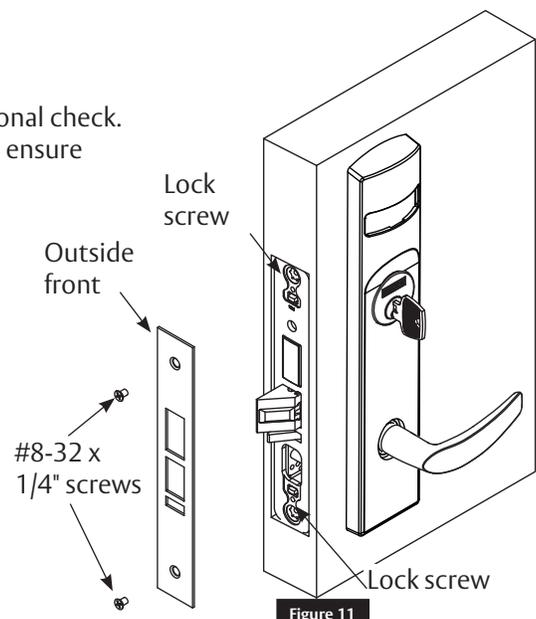


Figure 11

7800 and 8200 Series Mortise Locks

Used with VN1 Escutcheon Trim and V Series Indicators

Installation Instructions

SARGENT

ASSA ABLOY

6

Indicator Parts List

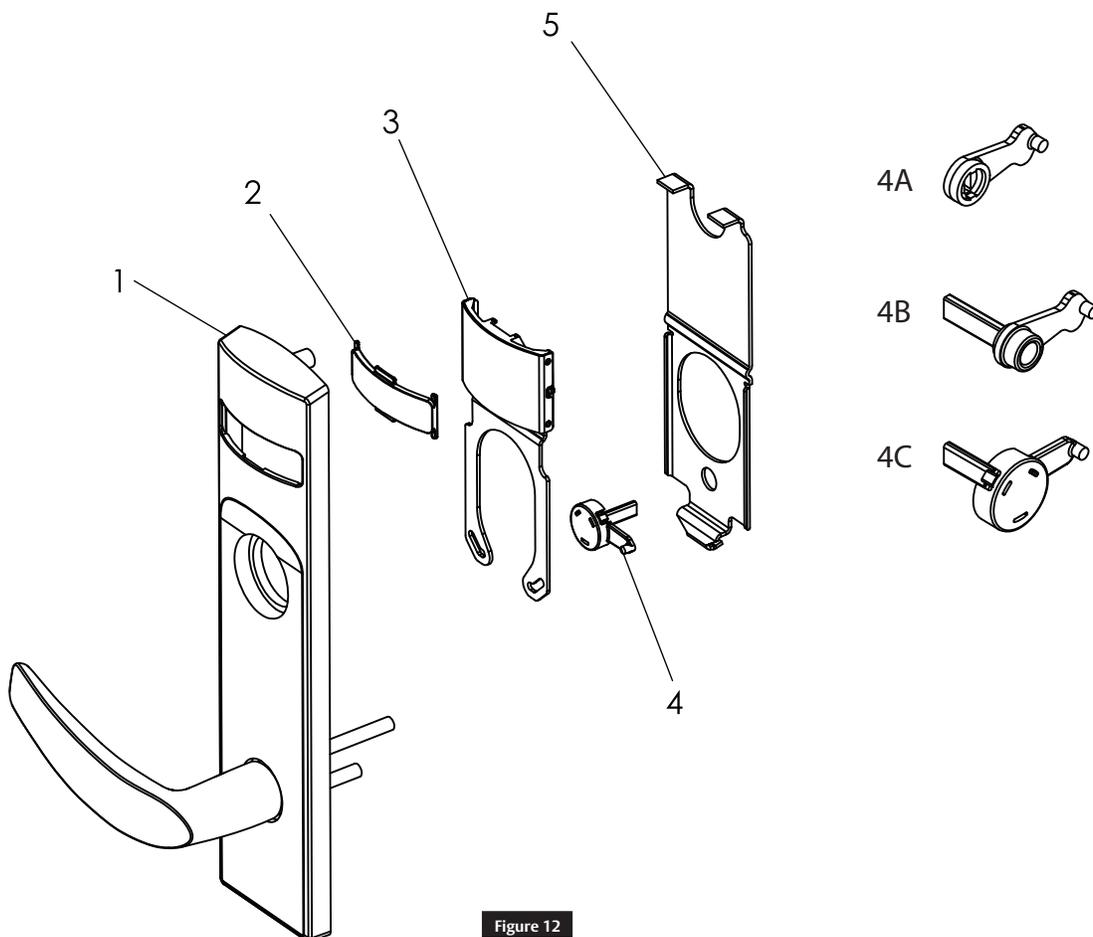


Figure 12

Figure 12	Description	Part Number	Req.
1	VN1 Indicator Escutcheon	Consult Factory	1
2	Indicator Window	81-0811	1
3	Indicator Display Assembly - Green Unlocked / Red Locked	82-5602	1
	Indicator Display Assembly - Green Vacant / Red Occupied	82-5603	
	Indicator Display Assembly - Green Unlocked Icon / Red Locked Icon	82-5604	
	Indicator Display Assembly - White Unlocked / Red Locked	82-5605	
	Indicator Display Assembly - White Vacant / Red Occupied	82-5606	
	Indicator Display Assembly - White Unlocked Icon / Red Locked Icon	82-5607	
4A	Indicator Spindle Cam - Thumbturn / Coin Turn	81-0745	1
4B	Indicator Spindle Cam - Cylinder / No Input / Blank	81-0756*	1
4C	Indicator Spindle Cam - 05, 37, 38, 59 Functions	81-5577*	1
5	Indicator Backing Plate	81-0748	1
6	VN1 Escutcheon Screw Pack (Not shown)	82-5587 x finish*	1
7	Door Marker Template (Not shown)	A8258	1

* These parts are for 1-3/4" standard thickness doors. For other thicknesses, please contact factory.

Note:

Reference 8200 Series parts manual for all lock body parts.

7800 and 8200 Series Mortise Locks

Used with VN1 Escutcheon Trim and V Series Indicators

Installation Instructions

SARGENT[®]

ASSA ABLOY

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, locks, perimeter fencing, access control and service.

SARGENT
ASSA ABLOY

SARGENT Manufacturing Company
100 Sargent Drive
New Haven, CT 06511 USA
800-727-5477
www.sargentlock.com

Founded in the early 1800s, SARGENT® is a market leader in locksets, cylinders, door closers, exit devices, electro-mechanical products and access control systems for new construction, renovation, and replacement applications. The company's customer base includes commercial construction, institutional, and industrial markets.

SARGENT is a brand associated with ASSA ABLOY High Security Group, Inc., an ASSA ABLOY Access and Egress Hardware Group company. Copyright © 2019, 2020, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.