



Series 7290MPI x 790 (infinite hold open range)  
 Series 7290MPS x 790 (selective hold open range)  
 Non-Hold-Open Models

**ASSA ABLOY**

# Installation Instructions

**Fire Block for**  
 Overhead Concealed Closers  
 Holder Releasing Device  
 with Rigid Slide Arm

**CAUTION**  
 An incorrectly installed or improperly adjusted door closer can cause property damage or personal injury. These instructions should be followed to avoid the possibility of misapplication or misadjustment.


*For wood doors 1- 3/4" to 2 -1/4" (45-57mm) thick  
 hung in a hollow metal frame*

*Standard butt hinge  
 Labeled 20 minute fire  
 door openings*

## Supplemental sheet for use with Installation Instructions and separate template.

**Note:**

1. Do not scale drawing
2. Hardware dimensions shown (for cutouts)
3. Dimensions are in inches.
4. This dimension must be taken from separate template provided.

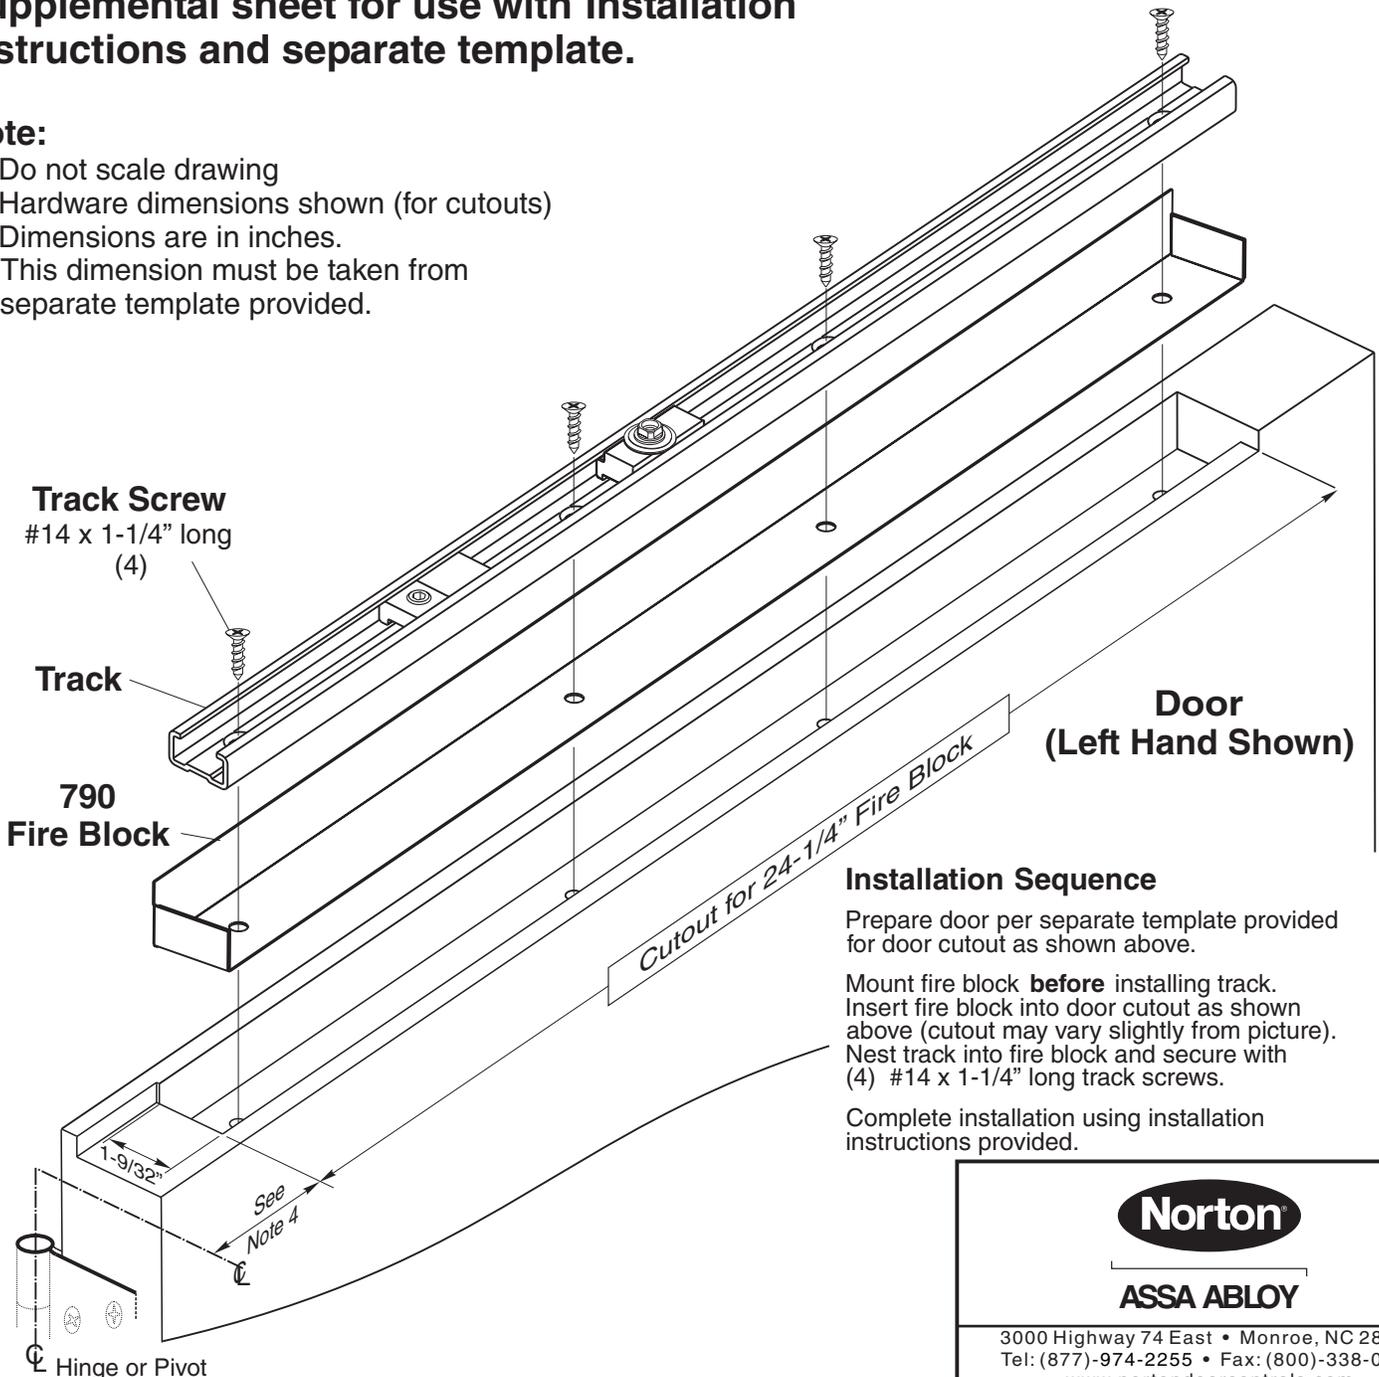

**Installation Sequence**

Prepare door per separate template provided for door cutout as shown above.

Mount fire block **before** installing track. Insert fire block into door cutout as shown above (cutout may vary slightly from picture). Nest track into fire block and secure with (4) #14 x 1-1/4" long track screws.

Complete installation using installation instructions provided.

**Norton**  
**ASSA ABLOY**  
 3000 Highway 74 East • Monroe, NC 28112  
 Tel: (877)-974-2255 • Fax: (800)-338-0965  
 www.nortondoорcontrols.com