



Parallel Arm × Flat Form Arm (or Round Form Arm)

8616 AF86P (Flat Form Arm – Shown)

8616 ARP (Round Form Arm)

8616 AO8P (Round Form Arm)

(P86 bracket furnished standard)

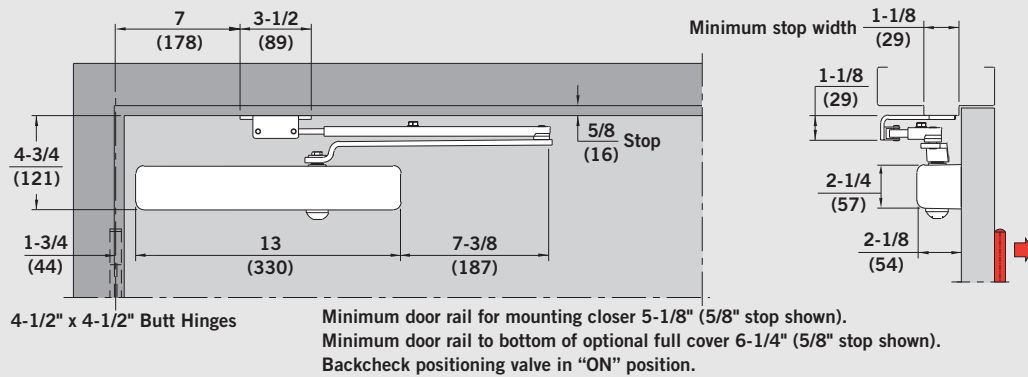



Size Selection Chart

CLOSER	INTERIOR/ EXTERIOR	DOOR WIDTH					MAXIMUM OPENING	APPROX. BACKCHECK	APPROX. DELAYED ACTION	MINIMUM DOOR WIDTH
		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.				
8616	INTERIOR	•	•	•	•	•	180°	60°-180°	180°-75°	24"
	EXTERIOR	•	•	•	•	N/A				

Parallel Arm × Friction Hold Open

8616 FHP

(PHB bracket furnished standard)

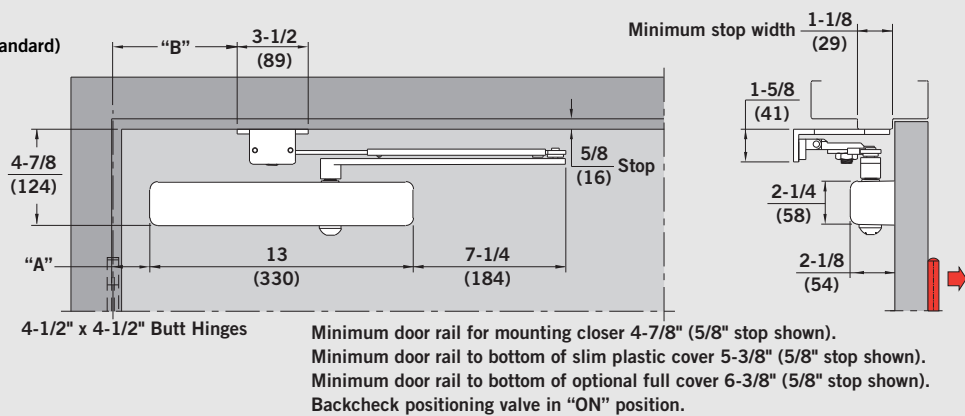

Size Selection Chart

CLOSER	INTERIOR/ EXTERIOR	DOOR WIDTH					TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK	APPROX. DELAYED ACTION	MIN. HOLD OPEN	MAX. HOLD OPEN	MIN. DOOR WIDTH
		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.									
8616	INTERIOR	•	•	•	•	•	TO 100°	3-5/8" (92)	9" (228)	110°	65°-110°	110°-80°	45°	105°	29"
	EXTERIOR	•	•	•	•	N/A	OVER 100°	1-1/8" (29)	6-1/2" (165)	180°	80°-180°	180°-95°	45°	175°	24"