


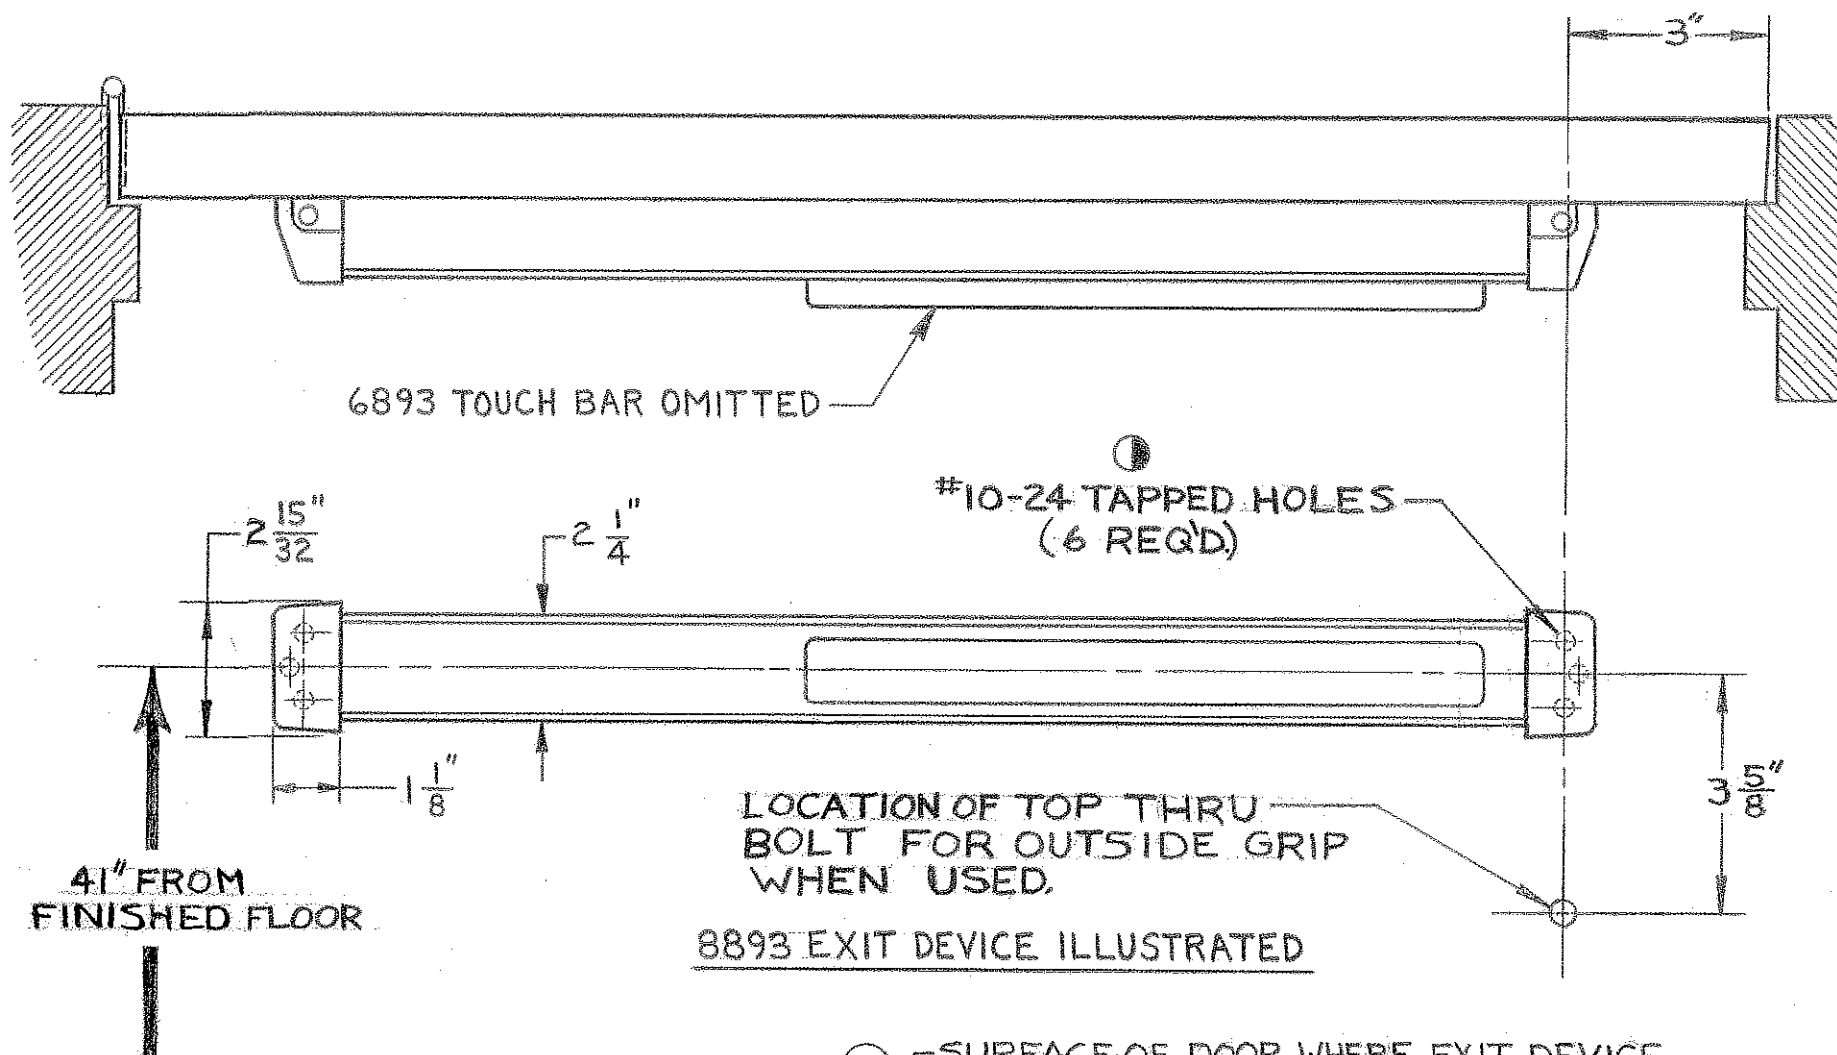

③ — SURFACE OF DOOR WHERE EXIT DEVICE
IS TO BE APPLIED, MUST BE FLUSH.

② — LOCATE, DRILL AND TAP HOLES
WHEN APPLYING HARDWARE TO DOOR.

① — TOLERANCE ON ALL
FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$ ".

SARGENT & COMPANY

NEW HAVEN 9, CONN.

METAL DOOR TEMPLATE :
6893 & 8893 EXIT DEVICE
(INACTIVE TRIM)

RELEASE DATE :

16 DEC 87

TEMPLATE NO.
4286 D