



Top Jamb x Flat Form Arm x Angle Bracket

8916 AF89 AB89
8956 AF89 AB89

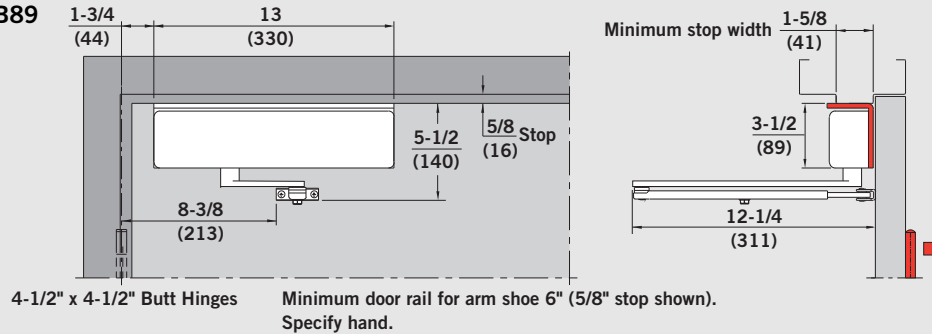

Size Selection Chart



CLOSER	INTERIOR/ EXTERIOR	DOOR WIDTH							MAXIMUM OPENING	APPROX. BACKCHECK*	APPROX. DELAYED ACTION
		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.	4'-6" max.	5'-0" max.			
8916	INTERIOR	•	•	•	•	•	•	N/A	180°	70°-180°	180°-80°
	EXTERIOR	•	•	•	•	•	N/A	N/A			
8956	INTERIOR	N/A	N/A	N/A	N/A	•	•	•			
	EXTERIOR	N/A	N/A	N/A	•	•	•	N/A			

* Backcheck positioning valve factory preset to on, advancing backcheck approximately 15°.

Parallel Arm x Flat Form Arm

8916 AF89P
8956 AF89P

(P89 bracket furnished standard)

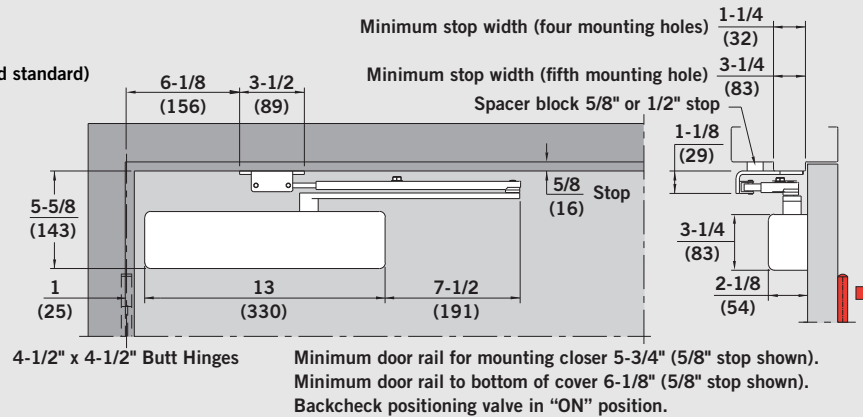

Size Selection Chart

CLOSER	INTERIOR/ EXTERIOR	DOOR WIDTH							MAXIMUM OPENING	APPROX. BACKCHECK	APPROX. DELAYED ACTION	MINIMUM DOOR WIDTH
		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.	4'-6" max.	5'-0" max.				
8916	INTERIOR	•	•	•	•	•	N/A	N/A	180°	60°-180°	180°-70°	24"
	EXTERIOR	•	•	•	•	N/A	N/A	N/A				
8956	INTERIOR	N/A	N/A	N/A	•	•	•	•				
	EXTERIOR	N/A	N/A	•	•	•	N/A	N/A				