














9500/F9500 Wide Stile Mortise Lock Exit Devices

The 9500 and F9500 include a heavy-duty, high quality deadlocking mortise lock that provides a high level of security

and exceptional durability. The F9500 Series devices are U.L.-listed for three-hour steel fire door applications.

New mortise lock chassis with several new benefits including easier and faster to field reverse.

Model	Function	Operation	Trim Model									
9500 F9500	01 ¹	Exit Only (no trim)										
9500 F9500	DT ¹	Dummy Trim	VODT		NPTDT		YODT					
9500	02 ¹	Entrance by trim when actuating bar is locked down.	V102M V302M		PTT02M PRT02M							
9500 F9500	03 ²	Entrance by trim when latch bolt is retracted by key. Key removable only when locked.	VO03M		V103M V303M		NPT03M		PTT03M PRT03M		YO03M	
9500 F9500	05 ³	Entrance by thumbpiece. Key locks or unlocks thumbpiece.					HTT05M HRT05M					
9500 F9500	08 ¹	Entrance by knob or lever. Key locks or unlocks knob or lever.							YK08M			
9500	22 ³	Entrance by thumbpiece (no cylinder). Trim always active.					HTT22M HRT22M					
9500 F9500	23 ¹	Entrance by knob or lever (no cylinder). Knob or lever always active.										











¹ Uses 08 function lock case


² Uses 03 function lock case—
Uses 08 Lock case with #13 cam to achieve 03 function.

³ Uses 05 function lock case

NOTES:

- When a trim designation includes an x (such as Yx23), replace x with the letter or number assigned to the chosen lever style. For example, YR23 specifies lever style R. See pages 34-35 for details.
- When ordering a 9500 device without trim, specify the handing and device function so the correct mortise lock can be supplied.


Trim Model		
YP02		
YK02R		
Yx02R		
YP03		
YK08M		
Yx03MR		
Yx08M		
Yx08MC		
YK23M		
Yx23M		

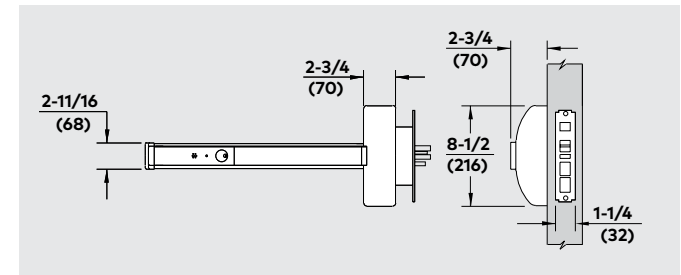

Standard Strike

No. -

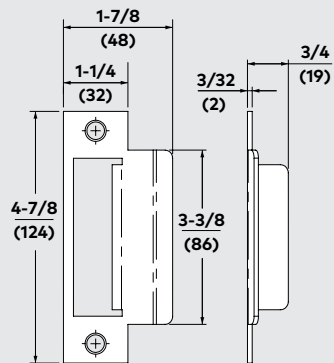
Standard strike with
9500/F9500



Optional Strike


No. O

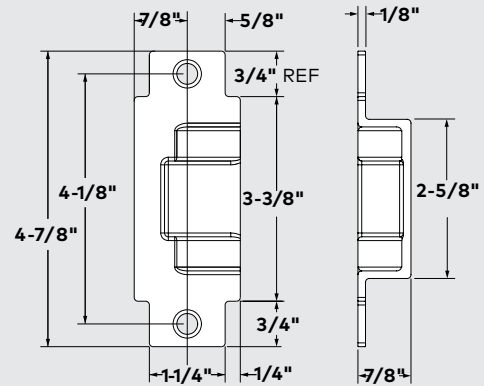Non-handed open back strike (Double door
applications)



Mortise Lock

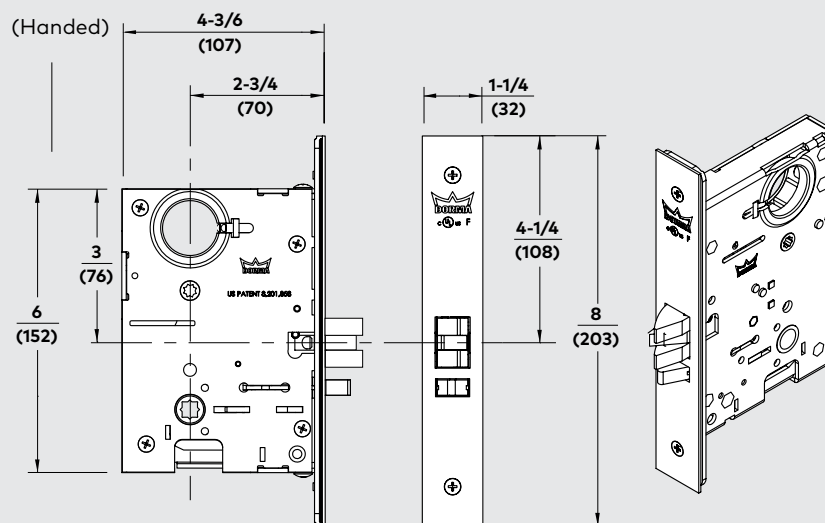Available Functions – 03, 05, 08



Vertical Reference

