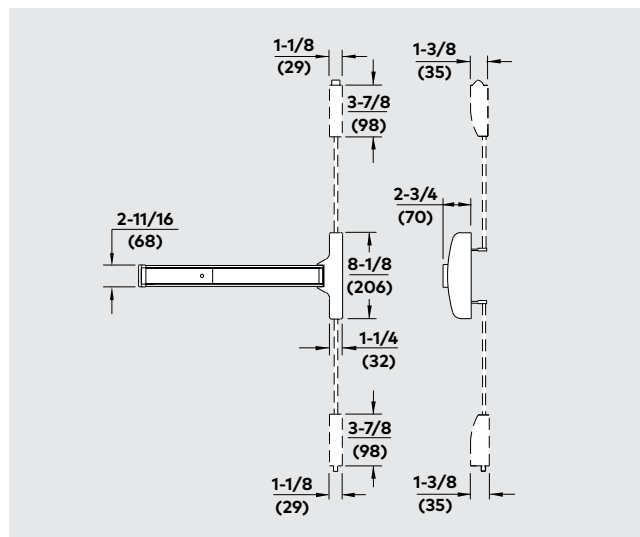
























9600/F9600 Narrow Stile Concealed Vertical Rod Exit Devices



Specify Door Brackets

NS – 2-1/8" narrow stile aluminum (default)

WD – Narrow stile wood or hollow steel

Model	Function	Operation	Trim Model									
9600 F9600	01	Exit Only (no trim)										
9600 F9600	DT	Dummy Trim	ZODT									
9600	02	Entrance by trim when actuating bar is locked down.	OP02		ZP02		ZK02R		Zx02R			
9600 F9600	03	Entrance by trim when latch bolt is retracted by key. Key removable only when locked.	ZO03*		ZP03		ZK03R		Zx03R			
9600 F9600	08	Entrance by knob or lever. Key locks or unlocks knob or lever.					ZK08		Zx08		Zx08C	
9600 F9600	09	Entrance by knob or lever only when released by key. Key removable only when locked.					ZK09		Zx09		Zx09C	
9600 F9600	11	Entrance by thumbturn and pull. Key locks or unlocks thumbturn.	Z011		ZP11							
9600 F9600	12	Entrance by thumbturn and pull only when released by key. Key removable only when locked.	Z012		ZP12							
9600 F9600	23	Entrance by knob or lever (no cylinder). Knob or lever always active.					ZK23		Zx23			
9600 F9600	25	Entrance by thumbturn and pull (no cylinder). Thumbturn always active.					ZP25					

* Pull by others.

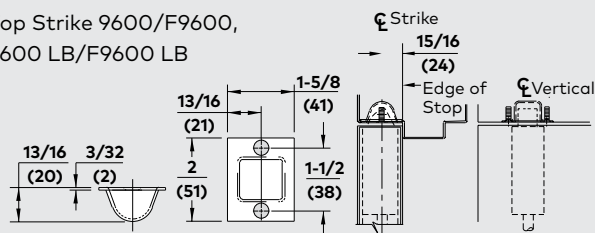
NOTE: When a trim designation includes an x (such as Zx23), replace x with the letter or number assigned to the chosen lever style.

For example, ZR23 specifies lever style R. See page 63 for details.

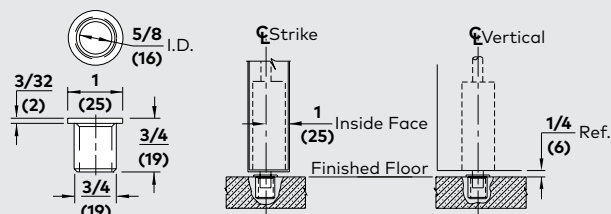
Standard Strikes

No. -

Top Strike 9600/F9600,
9600 LB/F9600 LB

**No. -**

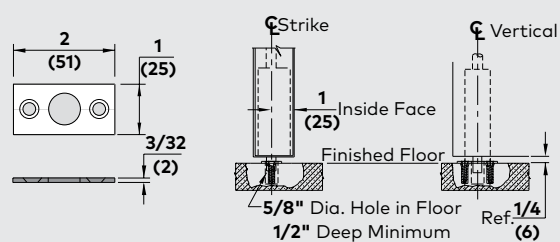
Bottom Strike 9600/F9600



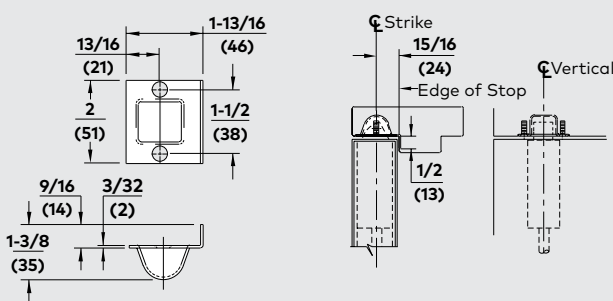
Optional Strikes

No. F

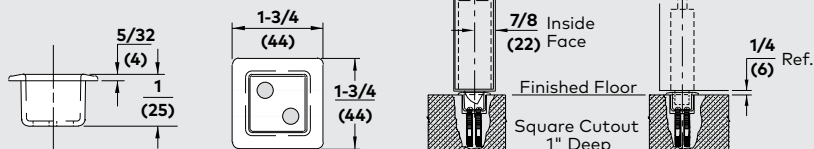
For bottom slidebolt

**No. W**

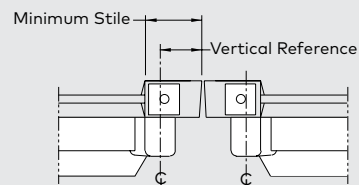
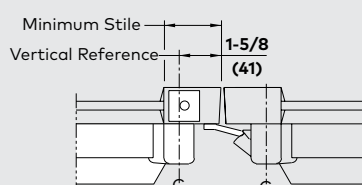
For wood frame installations

**No. P**

For use with optional pullman
bottom latch bolt



Minimum Stile & Vertical Reference

Vertical Rod x Vertical Rod**Vertical Rod x Rim**

9600	Vertical Reference	Minimum Stile
No Trim/OP02	1-1/4 (32)	1-7/8 (48)
Z Trim	1-1/4 (32)	2-1/16 (52)

F9600	Vertical Reference	Minimum Stile
No Trim/OP02	2-3/4 (70)	3-3/16 (81)
Z Trim	2-3/4 (70)	3-3/16 (81)

Not Fire Rated

9600	Minimum Stile
No Trim/OP02	2-3/16 (56)
Z Trim	2-7/16 (62)