


9700/F9700 Narrow Stile Rim Exit Devices

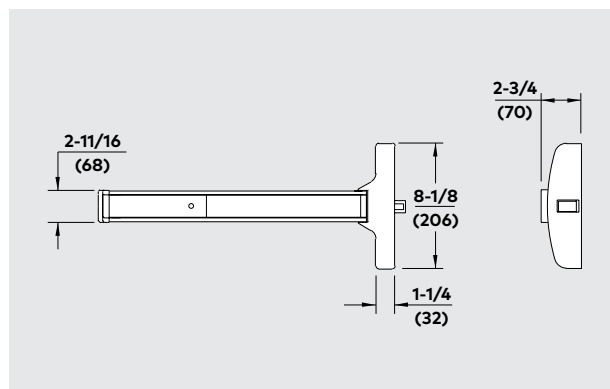

Model	Function	Operation	Trim Model			
9700 F9700	01	Exit Only (no trim)				
9700 F9700	DT	Dummy Trim	ZODT			
9700	02	Entrance by trim when actuating bar is locked down.	OP02		ZP02	
9700 F9700	03	Entrance by trim when latch bolt is retracted by key. Key removable only when locked.	ZO03*		ZP03	
9700 F9700	08	Entrance by knob or lever. Key locks or unlocks knob or lever.			ZK08	
9700 F9700	09	Entrance by knob or lever only when released by key. Key removable only when locked.			Zx08	
9700 F9700	11	Entrance by thumbturn and pull. Key locks or unlocks thumbturn.	ZO11		ZP11	
9600 F9600	12	Entrance by thumbturn and pull only when released by key. Key removable only when locked.	ZO12		ZP12	
9700 F9700	23	Entrance by knob or lever (no cylinder). Knob or lever always active.			ZK23	
9700 F9700	25	Entrance by thumbturn and pull (no cylinder). Thumbturn always active.			ZP25	


* Pull by others.

NOTE: When a trim designation includes an x (such as Zx23), replace x with the letter or number assigned to the chosen lever style.
For example, ZR23 specifies lever style R. See page 63 for details.

Standard Strikes

No. B

Standard strike with 9700

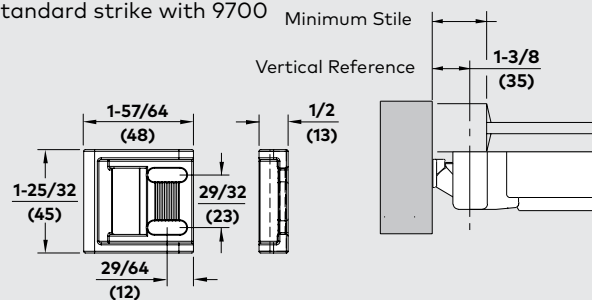


Strike	Vertical Ref./ Min. Stile	No Trim/ OP02	Trim
B	Vertical Ref.	1-3/8 (35)	1-3/8 (35)
	Min. Stile	2-7/16 (62)	2-9/16 (65)

All dimensions based on 1/2" (13) stop height

No. -

Standard strike with F9700

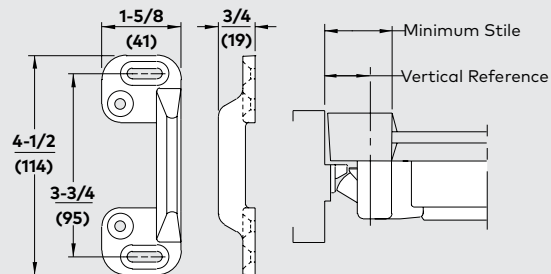


Strike	Vertical Ref./ Min. Stile	No Trim/ OP02	Trim
-	Vertical Ref.	1-1/2 (38)	1-1/2 (38)
	Min. Stile	2-9/16 (65)	2-11/16 (68)

All dimensions based on 1/2" (13) stop height

Optional Strikes

No. R

Roller strike

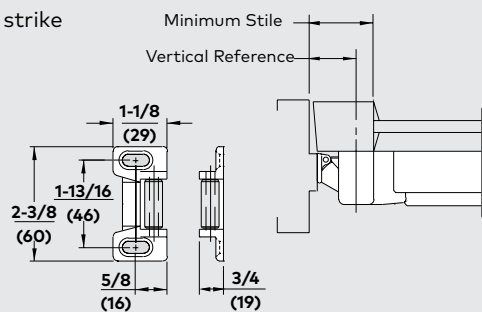


Strike	Vertical Ref./ Min. Stile	No Trim/ OP02	Trim
R	Vertical Ref.	1-1/2 (38)	1-1/2 (38)
	Min. Stile	2-9/16 (65)	2-11/16 (68)

All dimensions based on 1/2" (13) stop height

No. V

Overlap strike

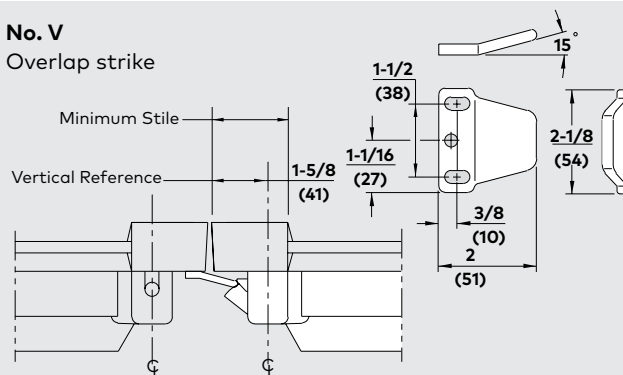**Not Fire Rated**

9700	Minimum Stile
No Trim/OP02	2-3/16 (56)
Z Trim	2-7/16 (62)