

# Electric Strikes

# 9700 Surface Mounted Electric Strike

Works with Corbin Russwin SecureBolt®  
and Yale SquareBolt® exit devices



The stylish  
windstorm resistant  
and fire rated,  
squarebolt solution.

The 9700 Series Electric Strike is a heavy duty, surface mounted electric strike designed to accommodate Corbin Russwin SecureBolt® and Yale SquareBolt® exit devices. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. It is field selectable for fail secure or fail safe operation, and for 12 or 24 VDC.

The 9700 is designed with the strength and durability required to exceed the severe forces of ANSI Windstorm testing. This unique electric strike also complies with NFPA 80-07 guidelines for retrofit into fire rated frames.

## Features

### Standard Features

- Installs in metal or wood (wood screws not included)
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper resistant
- Static strength to 2,000 lbs
- Dynamic strength to 120 ft-lbs
- Endurance 1 million cycles
- Field selectable fail safe/fail secure
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

### Optional Features

- LBM Latchbolt monitor
- LBSM Latchbolt strike monitor

### Accessories

- 9000-116-XXX 1/16" Spacer plate (Available in 613E, 628E, 630 & BSP finishes)
- 9000-108-XXX Spacer plate (BSP, 613E, 630, 628E)
- 9000-MTK Metal template kit
- SMB Surface mounting box
- 2001M Plug-in bridge rectifier
- 2004M ElectroLynx® adapter
- 2005M3 SMART Pac® III
- 2006M Plug-in buzzer



Grade 1

SecuriCare  
WarrantyRim Exit  
DevicesField Selectable  
(Fail Secure  
/Fail safe)Dual Voltage  
12/24

Fire Rated

Windstorm  
ResistantOutdoor  
RatedBurglary  
Rated

ASSA ABLOY

## 9700 Surface Mounted Electric Strike

### Specifications

#### Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 listed
- UL 305 listed
- RoHS compliant
- UL 10C fire rated, 3-hour single door (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- California Fire Marshal listed
- NFPA 80-07 compliant
- ANSI/SDI A250.13 windstorm resistant
- Florida Building Code approved TAS 201, 202, 203
- ANSI-ASTM E330


#### Frame Application

- Metal
- Wood

#### Electrical (DC Continuous Duty)

- Dual voltage 12/24 VDC
- 450 mA at 12 VDC/250 mA at 24 VDC

### Dimensions

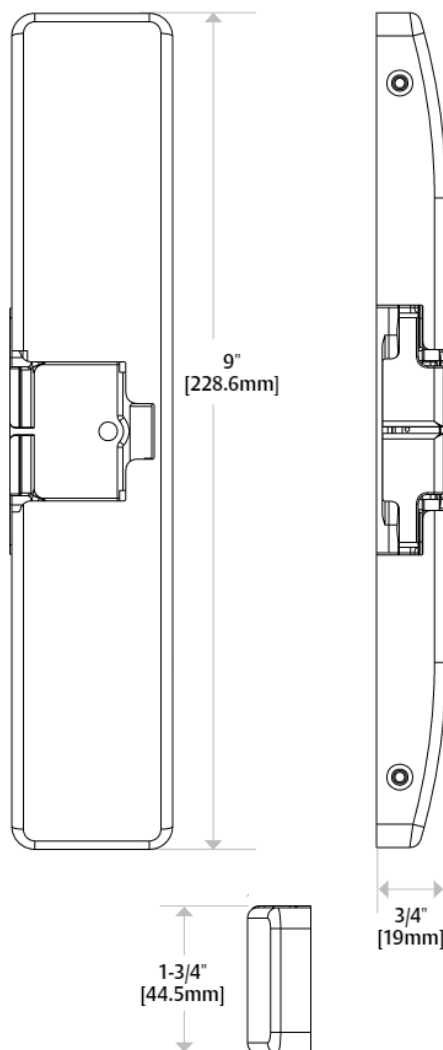

### How to Order

| SERIES  | FINISH   | OPTION (S)   |
|---|--|--|
| <b>9700</b>   | <b>- 630</b>   | <b>- LBM</b>   |
| 9700 Surface Mounted Electric Strike for Corbin Russwin SecureBolt® and Yale SquareBolt® Rim Exit Devices; no faceplates required | 605 Bright Brass<br>606 Satin Brass<br>612 Satin Bronze<br>613 Bronze Toned<br>613E Dark Oxidized Satin Bronze Powder<br>629 Bright Stainless Steel<br>630 Satin Stainless Steel | LBM Latchbolt Monitor<br>LBSM Latchbolt Strike Monitor |

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.