



11U93 Single Lever Pull

1. Align mounting plate with five holes prepared in door, dimple faces edge of door
2. Install screw and washer from opposite side of door
3. Install four surface screws
4. Assemble rose and tighten
5. Assemble lever
6. Secure with set screw

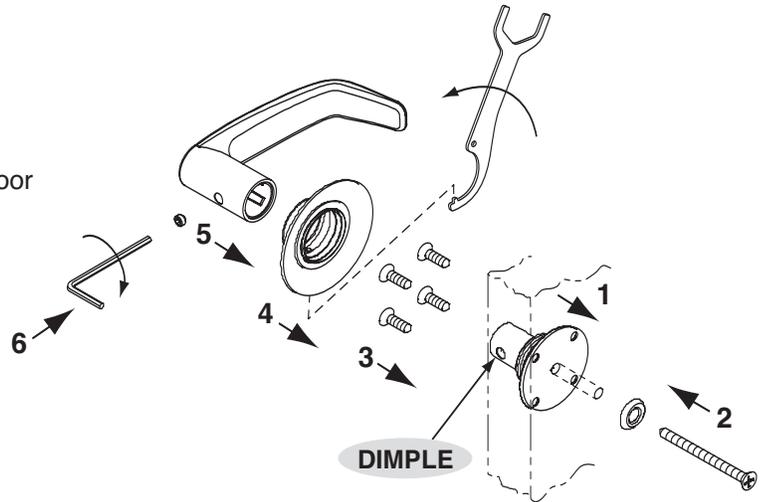

11U94 Double Lever Pull

1. Align both mounting flange assemblies with five holes prepared in door, dimple faces edge of door
2. Install long screw to secure mounting plates
3. Install eight surface screws
4. Assemble both roses and tighten
5. Assemble both levers
6. Secure with set screws

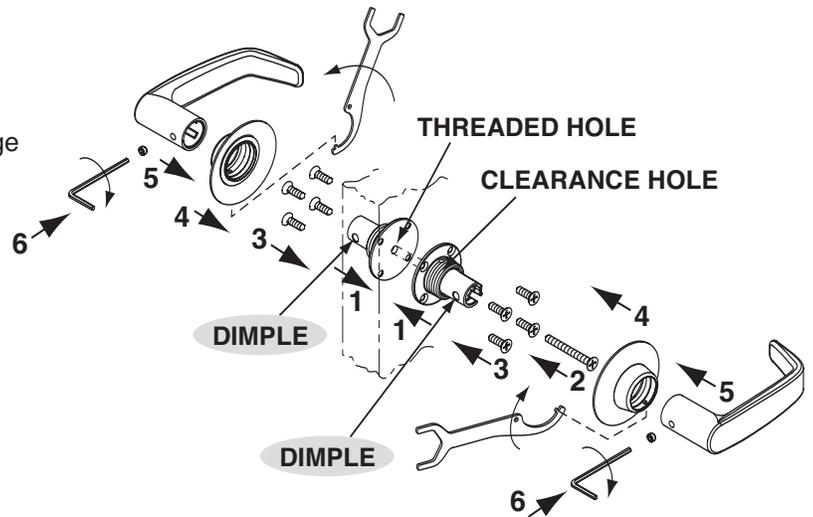

11U94-2 Double Lever Pull

1. Insert tube assembly into hole in door
2. Insert latch assembly
3. Push aligning pin through tube assembly and latch assembly
4. Secure latch assembly with two screws
5. Assemble both rose assemblies and tighten
6. Assemble both levers
7. Secure with set screws

