


30-Option Lever to Accept Schlage® Fixed Core Cylinder

Tailpiece Instructions

1. Remove tailpiece from Schlage® cylinder.
2. Slide steel washer (supplied by Sargent) onto tailpiece as shown below.
3. Re-install tailpiece and washer into Schlage® cylinder.

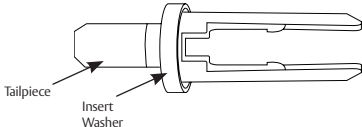

1-800-727-5477 • www.sargentlock.com

Copyright © 2020 SARGENT Manufacturing Company. All rights reserved.
Reproduction in whole or in part without the express written permission
of SARGENT Manufacturing Company is prohibited.

A7476C 03/20

Experience a safer
and more open world