



CERTIFICATIONS

FIRE-RATED LITE KITS

Lite Kits installed in fire-rated doors require fire-rated glass and glazing tape.

ACCESSIBILITY STANDARD COMPLIANCE

ADA Standards require that the bottom of the glass panel in a vision lite be located 43" maximum above the floor. Exception is made for vision lites with the lowest part more than 66" above the floor, which are not required to comply.





LITE KIT AND LOUVER ORDERING INFORMATION

The following information is necessary for ordering (quantities are not included in product numbers):

ALL PRODUCTS ARE ORDERED USING CUTOUT SIZE

LITES KITS

LITES	DESCRIPTION
LT-B1	3/8" Glazing Pocket for 1/4" glass
LT-B2	÷
	9/16" Glazing Pocket for 3/8" to 1/2" glass
LT-B3	13/ ₁₆ " Glazing Pocket for 5/ ₈ " to 3/ ₄ " glass
LT-B4	11/16" Glazing Pocket for 7/8" to 1" glass

QUANTIT	TY PROFILE	FINISH	CUTOUT SIZE (WIDTH X HEIGHT)
10	LT-B1	Beige	12 x 12

LOUVERS

LOUVERS	DESCRIPTION
LV-IY	Inverted Y Louver
LV-FL	Fusible Link Fire Rated Louver
LV-WS	Windstorm Louver

QUANTITY	PROFILE	FINISH	CUTOUT SIZE (WIDTH X HEIGHT)
10	LV-IY	Dark Gray Primer Powder Coat	24 x 24

Order As: Qty 10 LV-IY Dark Gray 24 x 24

Order As: Qty 10 LT-B1 Beige 12 x 12

Steel louvers over 46" wide and aluminum louvers over 36" wide must be furnished as two louver cores. Wider louvers for transom applications require two louvers installed side by side. Please refer to the price book for more information on custom sizes.

US: 800 458 2424 | www.rockwoodmfg.com CA: 800 461 3007 | www.assaabloydss.ca Check the website for the most up-to-date product information.

Experience a safer


ROCKWOOD

ASSA ABLOY



STOCK LITE KIT SIZES

All LT-B1 models are available in the stock sizes listed below (stock sizes available in Beige, Dark Bronze, and Dark Gray Primer finishes). Base metal is galvanneal steel.

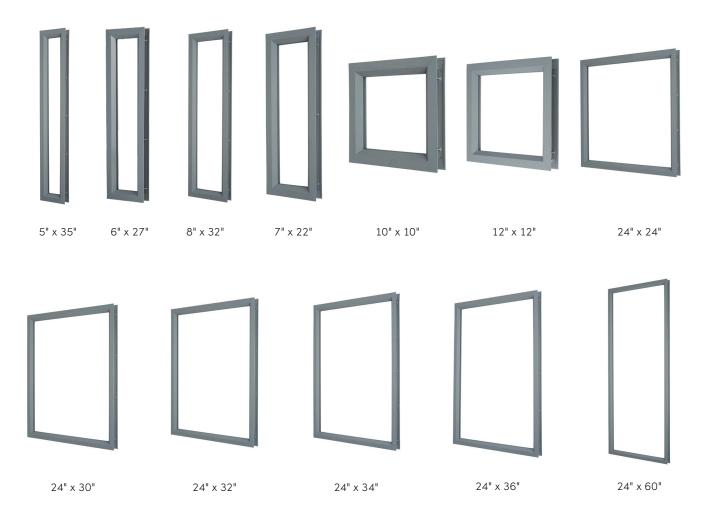

ROCKWOOD

ASSA ABLOY

Experience a safer and more open world

US: 800 458 2424 | www.rockwoodmfg.com CA: 800 461 3007 | www.assaabloydss.ca

Check the website for the most up-to-date product information.

POWDER COAT FINISHES

Lites and Louvers are available in the following Rockwood powder coat finishes. Custom powder coats also available upon request.



Galvanneal



Beige (Beige Powder Coat)



Dark Bronze (Dark Bronze Powder Coat)



Dark Gray (Dark Gray Primer Powder Coat (Standard Gray))



Gray (Gray Powder Coat)



10BE (Dark Oxidized Satin Bronze, Equivalent)



314E (Extra Dark Bronze, Equivalent)



BPC (Black Powder Coat)



BSP (Black Suede Powder Coat)



FBPC (Flat Black Powder Coat)



WPC (White Powder Coat)



WSP (White Suede Powder Coat)



(Red Powder Coat)

RPC

ASSA ABLOY

BEVELED LITE KITS

Our Beveled Lite Kits offer a wide viewing angle, suitable for both wood and metal doors with glazing material. They can be installed quickly without the need for drilling holes. The flush-mounted assembly, featuring a hemmed design, is ideally suited for clean environments.

STANDARD FEATURES

MATERIAL:

20 gauge Galvanneal Steel

FASTENERS:

#8 x 13/4" OH SMS

DIMENSIONS:

- Minimum width: 4" Maximum width: 38"
- Minimum height: 5" Maximum height: 82"

DOOR THICKNESS:

• 13/4" wood or metal

FIRE RATING:

- Classified in accordance with UBC code standard 7-2 for positive pressure
- 90 Minute Fire Rating



OPTIONAL FEATURES:

- Torx (Security screws)
- Custom powder coats

LT-B1

3/8" Glazing Pocket for 1/4" glass

Specifications for ordering custom size LT-B1 Kits

LT-B2


9/16" Glazing Pocket for 3/8" to 1/2" glass


LT-B3


13/16" Glazing Pocket for 5/8" to 3/4" glass


LT-B4

11/16" Glazing Pocket for 7/8" to 1" glass

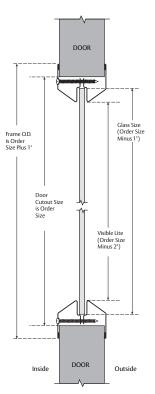

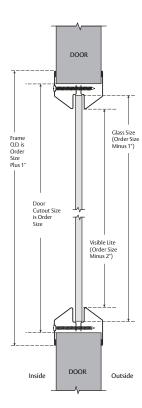

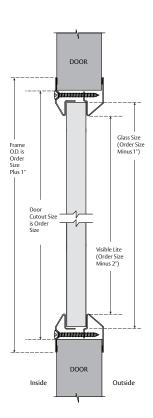

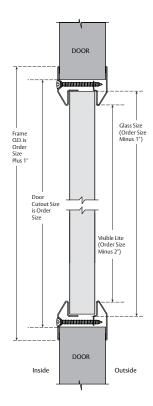



US: 800 458 2424 | www.rockwoodmfg.com CA: 800 461 3007 | www.assaabloydss.ca Check the website for the most up-to-date product information.

BEVELED LITE KITS WITH GLASS

Select sizes of our LT-B1 Lite Kits are available with 1/4" laminated glass, 1/4" tempered glass, or 3/16" Pyran Platinum F fire-rated glass (supplied with Lorient fire glazing tape). Glass is also available to be purchased separately.



3/16" Pyran Platinum F Fire Rated Glass



1/4" Laminated or Tempered Glass

PROFILE #	CUTOUT DIMENSIONS
LT-B1	5" x 35"
LT-B1	6" x 27"
LT-B1	7" x 22"
LT-B1	12" x 12"
LT-B1	24" x 30"

LOUVERS



ROCKWOOD ASSA ABLOY

Experience a safer and more open world

US: 800 458 2424 | www.rockwoodmfg.com CA: 800 461 3007 | www.assaabloydss.ca

Check the website for the most up-to-date product information.

INVERTED "Y" LOUVER

The LV-IY louver for use with 13/4" wood or metal doors provides 50% free air flow. The 20 gauge inverted "Y" blades add stiffness and a burr-free exposed edge. The 18 gauge steel mitered frame secures the grille assembly in place giving it a clean appearance.





Order Size Door Cutout Outside

STANDARD FEATURES

MATERIAL:

18 gauge Galvanneal Steel frame 20 gauge steel inverted "Y" blades

FASTENERS:

#8 x 13/4" OH SMS

DIMENSIONS:

- Minimum width: 12" Maximum width: 34"
- Minimum height: 12" Maximum height: 78"

DOOR THICKNESS:

• 13/4" wood or metal

STANDARDS:

• 50% Free Air Flow

FIRE RATING:

UL listed

OPTIONAL FEATURES:

- Torx (Security screws)
- Security grille
- Insect screen
- Custom powder coats

Stocked LV-IY Sizes **Cutout Dimensions**

12" x 12"

18" x 12"

18" x 18"

24" x 12"

24" x 18"

24" x 24"

24" x 60"

US: 800 458 2424 | www.rockwoodmfg.com CA: 800 461 3007 | www.assaabloydss.ca Check the website for the most up-to-date product information.

Copyright © 2019 2021-2024, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

ROCKWOOD

ASSA ABLOY

FUSIBLE LINK FIRE RATED LOUVER

The LV-FL louver is for use with 13/4" wood or metal doors and provides 50% free air flow while fastening to one side to ensure security.



LV-FL



STANDARD FEATURES

MATERIAL:

18 gauge Galvanneal Steel frame 16 gauge adjustable "Z" blades

FASTENERS:

#8 x 1" FH SMS

DIMENSIONS:

- Minimum width: 12" Maximum width: 24"
- Minimum height: 12" Maximum height: 24"

DOOR THICKNESS:

• 13/4" wood or metal

STANDARDS:

• 50% Free Air Flow

FIRE RATING:

- UL10B Listed for 1-1/2 Hours
- Fusible link activates at 135°F

OPTIONAL FEATURES

- Torx (Security screws)
- Custom powder coats

Stocked LV-FL Sizes **Cutout Dimensions**


12" x 12"

18" x 12"

18" x 18"

24" x 12"

24" x 18" 24" x 24"

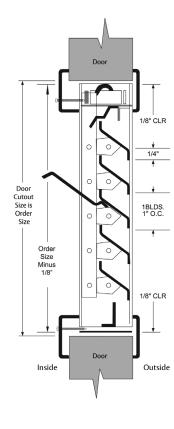

ROCKWOOD

ASSA ABLOY


US: 800 458 2424 | www.rockwoodmfg.com CA: 800 461 3007 | www.assaabloydss.ca Check the website for the most up-to-date product information. Copyright © 2019 2021-2024, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or


WINDSTORM LOUVER

The LV-WS Windstorm Louver is for use with 13/4" exterior doors and provides 50% free air flow. The 18 gauge inverted "Y" blades add stiffness and a burr-free exposed edge. The 18 gauge steel mitered frame secures the grille assembly in place giving it a clean appearance.



LV-WS



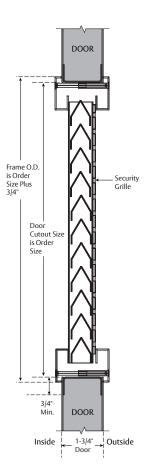

STANDARD FEATURES

MATERIAL:

18 gauge Galvanneal Steel frame18 gauge steel inverted "Y" blades

FASTENERS:

#8 FH MS (Inside) #8 Threaded Sleeve (Outside)

DIMENSIONS:

- Minimum width: 12" Maximum width: 34"
- Minimum height: 12" Maximum height: 78"

DOOR THICKNESS:

13/4" wood or metal

STANDARDS:

- 50% Free Air Flow
- UL Certified. Successfully tested in accordance with ASTM E1886, E1996, TAS 201
- Large Missile Impact, 350 Ft. Lbs., +/- 70 psf and ASTM E330, TAS 202,TAS 203, +/- 70 psf

OPTIONAL FEATURES:

- Insect screen
- Custom powder coats



ROCKWOOD ASSA ABLOY

Experience a safer and more open world

US: 800 458 2424 $\,\mid\,$ www.rockwoodmfg.com CA: 800 461 3007 $\,\mid\,$ www.assaabloydss.ca Check the website for the most up-to-date product information.

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window bardware, mechanical and smart locks, access control and service.



SALES & SUPPORT

SALES

To locate the representative for your area visit the Sales Representative map in the Contact Us area at: www.rockwoodmfg.com, for Canada: www.assaabloydss.ca, or call 1-800-461-3007.

EASY ORDER PLACEMENT

USA

Phone: 1–800–458–2424 Monday through Thursday, 8:00 am ET to 7:00 pm ET;

Friday 8:00 am ET to 4:30 pm ET.

Fax: 1-800-922-9212

Email: orders.rockwood@assaabloy.com

Online: Architectural Door Accessories WebShop: https://accessories.assaabloy.com/

Canada

Phone: 1-800-461-3007 Monday through Friday 8:00 am ET to 4:30 pm ET

Fax: 1-800-461-8989

Email: cavau-orders@assaabloy.com

Online: http://extranet.assaabloydss.ca/ and select Order Entry under the

Customer Service Menu

TECHNICAL SUPPORT

Customer Service Representatives are available Monday through Thursday, 8:00 am

ET to 7:00 pm ET; Friday, 8:00 am ET to 4:30 pm ET at 1-800-458-2424. Our website is available with current catalogs, sell sheets and the most

up-to-date templates. Visit www.rockwoodmfg.com

Canada:

Phone: 1-800-461-3007 Monday through Friday 8:00 am ET to 4:30 pm ET

Email.techsupport.dss.ca@assaabloy.com

Rockwood Manufacturing 300 Main Street Rockwood, Pennsylvania 15557 www.rockwoodmfg.com orders.rockwood@assaabloy.com 1 800 458 2424 ASSA ABLOY Opening Solutions Door Security Solutions Canada 160 Four Valley Drive Vaughan, ON L4K 4T9 www.assaabloydss.ca 1 800 461 3007