

# Adams Rite Product Catalog 2024 Table of Contents

### **DEADLOCKS**

### 1830 Series Swing Bolt Bottom Rail Deadlock\_ MS1837 Series MS® Two-Point Deadlock\_\_\_\_\_ MS1847 Series MS® Deadlock/Deadlatch MS1850S, MS1850S-X5X Series MS® Deadlocks \_\_\_\_\_12 MS1850SN, MS1850SN-45X Series MS® Deadlocks\_\_\_\_\_16 MS1861 Series MS® Bottom Rail Deadbolt \_\_\_\_\_\_ 20 1875 Two-Point Deadlock \_\_\_ MS+1890 Series MS® Deadlock/Deadlatch \_\_\_\_\_\_24 MS1950, MS1950-X5X Series MS® Deadlocks\_\_\_\_\_\_26 Dual Force® 2190, 2290 Series Interconnected Deadbolt/Deadlatch\_\_\_\_ 2331 Heavy Duty Deadbolt\_\_\_\_ 4070 Series Short Throw Deadbolt (Projection Style)\_\_\_\_\_ 38 5017 Deadlock/Deadlatch\_\_\_\_ 5500 Deadlock 42 Options & Accessories\_\_\_\_\_

### **EXIT DEVICES**

3100 Series Fire-Rated, 8100 Series Life-Safety Surface Vertical Rod Exit Device	8
8200 Series Narrow Stile Surface Vertical Rod Exit Device	_ 8
3300 Series Fire-Rated, 8300 Series Life-Safety Mortise Exit Device	_ 8
8400 Series Life-Safety Narrow Stile Mortise Exit Device_	8
3600 Series Fire-Rated, 8500 Series Life-Safety Concealed Vertical Rod Exit Device	_ 9
8600 Series Narrow Stile Concealed Vertical Rod Exit Device	9
3700 Series Fire-Rated, 8700 Series Life-Safety Rim Exit Device	9
8800 Series Narrow Stile Rim Exit Device	9
P8800, P8700 Series Narrow Stile Pullman Exit Device_	9
3900 Series Fire-Rated, 8900 Series Life-Safety Surface Concealed Vertical Rod Exit Device	_ 10
8099 Dummy Push Bar	_ 10
Ontions for 3000/8000 Series Exit Devices	10

### CVIINDEDE 8 ACCECCODIE

4000 Series MS® Deadlock Strikes	16
4015 Threshold Bolt	164
4016 Header Bolt	166
4085 Header Bolt	168
4089 Exit Indicator	170
4800 Series Strikes	172
4901, 4902 Deadlatch Strikes	174
4024, 4025, 4026 Cylinder Pulls	176
4036 Mortise Cylinder, 4066 Thumbturn	178
MS4043 Cylinder Guard	180
B1921   B1923 Reinforcing Pivots	182

### DEADLATCHES

DL100 Wireless Deadlatch	46
Steel Hawk® 4300 Electrified Deadlatch	50
4510 Standard Duty Deadlatch	52
4530 Standard Duty Deadlatch	54
4781 Two-Point Deadlatch with Paddle	56
4900 Heavy Duty Deadlatch	58
4920AN Heavy Duty Deadlatch (ANSI Size)	60
Options & Accessories	62

### FLECTRIC STRIKES

7100 Series Electric Strikes	106
7160, 7170 Electric Strikes	112
7200 Series Electric Strike	116
Ultraline® 7400 Series Electric Strikes	120
Ultraline® 74R1, 74R2 Electric Strikes	126
7800 Electric Strike	130
Options & Accessories	132

### POWER

S-EXIT Power Supply	_186
612 Power Transfer Device	_188
ccessories for Power Supplies	_ 190
OTE: Adams Rite PS-SE and PS-LR have been discontinued as of	

## November 1, 2020. The PS-EXIT is designed to replace the PS-SE and PS-LR.

### FLUSHLOCKS

1870 Series Cylinder-Operated Flushbolt	66
1870HM Cylinder-Operated Flushbolt	68
1877 Cylinder-Operated Flushbolt	70
MS1880 Two-Point Flushbolt	72
MS2180 Auto-Release Two-Point Flushbolt	_74
4189, 4190 Flush Locksets (Including Deadlock)	76
4430, 4431 Flush Locksets (Including Deadlock)	78
Ontions & Accessories	80

### TRIM/

1000 Series Turns	136
3080 Series Entry Trim	138
eForce® 3090-150 Keyless Entry	142
4550 MS® Deadlock Lever	144
4560 Series Deadlatch Handles	146
4570 ICU Latch Operator	150
4576 ICU Flushbolt with ICU Lever	152
4590 Deadlatch Paddle	154
4591 Deadlatch Paddle	156
4600 Heavy Duty Designer Deadlatch Handles	158

### GENERAL INFORMATION

MS® Prep, Upgrade Path	
Icons Glossary	193
Comprehensive Training Opportunities	193
Warranty Torms & Conditions	19.

# Adams Rite MS® Prep

# What is the MS® Prep?

The MS® Prep is the industry standard lock prep and dominant locking solution for aluminum openings. The MS Prep is identified by the 6-7/8" x 1" cut-out with radius corners and is designed to fit Adams Rite MS deadlocks and deadlatches.

Look for the

MS® Prep


symbol throughout this catalog to help identify these products.

When ordering and installing an Adams Rite lockset, here is some important information to keep in mind:

Stile Prep for Aluminum Indicates lockbody cutout and cylinder hole.

Mounting Methods


How to mount the lockbody within the Prep.

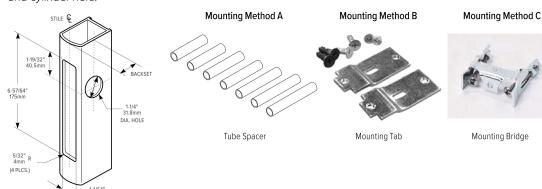

### **Backset**

It's important to know the backset used on the stile as this will change the overall depth of the desired lock body. For example, if the backset on the opening is 1-1/8", you will need to ensure that the desired lock body has a matching 1-1/8" backset in order to align properly with the prep on the door.

Backset is the measured distance from the centerline of the cylinder hole to the outside of the stile wall or nose. Use a tape measure or ruler to measure this horizontal dimension.



BACKSET	"A"
7/8"	1-9/16"
22mm	34.7mm
31/32"	1-5/8"
24.6mm	41.3mm
1-1/8"	1-25/32"
28.6mm	45.2mm
1-1/2"	2-1/4"
38.1mm	57.2mm

0

BACKSET MEASURED

Backset is engraved on the side of MS1850 lock body.

# Mechanical to Electrical Upgrade Path

## How does Adams Rite fit in?

As an architectural brand, Adams Rite offers an effective and affordable mechanical to electrical upgrade path.

Since the launch of the MS1850, Adams Rite has taken this foundational MS\* door prep and designed a modular portfolio of mechanical and electromechanical products that provide easy installation and offer simple retrofit solutions for aluminum applications to easily enhance and improve the safety and security of your opening.



# A Range of Upgrade Options\*

Deadlocks & Deadlatches: A progression of mechanical to electrified to wireless.

- Backward compatibility allows for the replacement of a mechanical lock with a latch that builds off of the base MS prep
- Electrified deadlatches can be the simplest way to electrify an opening and provide flexible traffic control. They also can be paired in conjunction with an auto-operator.
- Provide compliance to ADA and Single Motion to Egress (ANSI/BHMA A156.41) code requirements when paired with compatible Adams Rite lever or paddle

**Electric Strikes:** Compatible with Adams Rite deadlatches, exit devices and power supplies for an easy electrified upgrade path.

- Quickly electrifies an opening and can be tied into an existing access control system in conjunction with a card reader or keypad
- Address preload conditions with the preload-capable 7400 Series

Trim: Integrates with existing mechanical Adams Rite deadlocks and deadlatches.

- Electrified trim is great for applications where reusing the existing mechanical lockset is preferred
- Battery operated products provide an simple upgrade when pulling wires is cost prohibitive but access control is required





**Exit Devices:** Offering access control and code-compliant accessibility; Secure any single or double door application

- · Pair with existing trim and an electric strike
- Electrification options include solenoid Electrified Latching (EL & LR) and Motorized Latch Retraction (MLR)

\*Functionality and code compliance must always be considered with upgrades. Always consult with your local AHJ for more information.



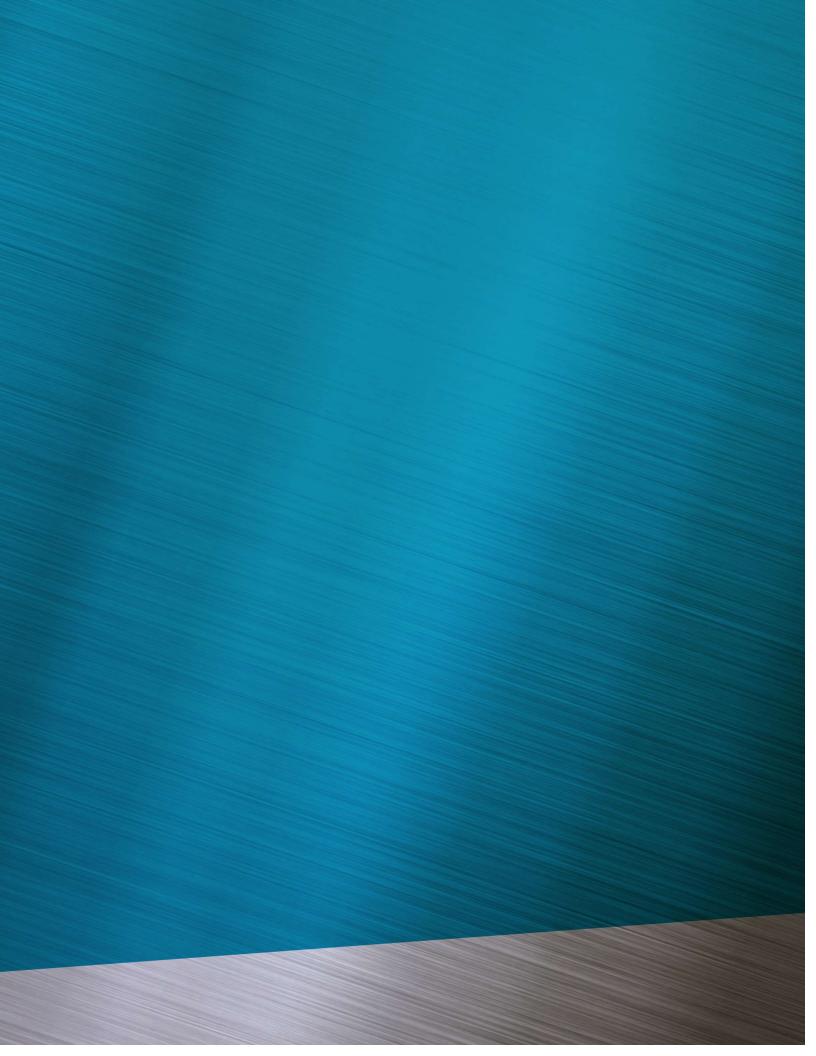

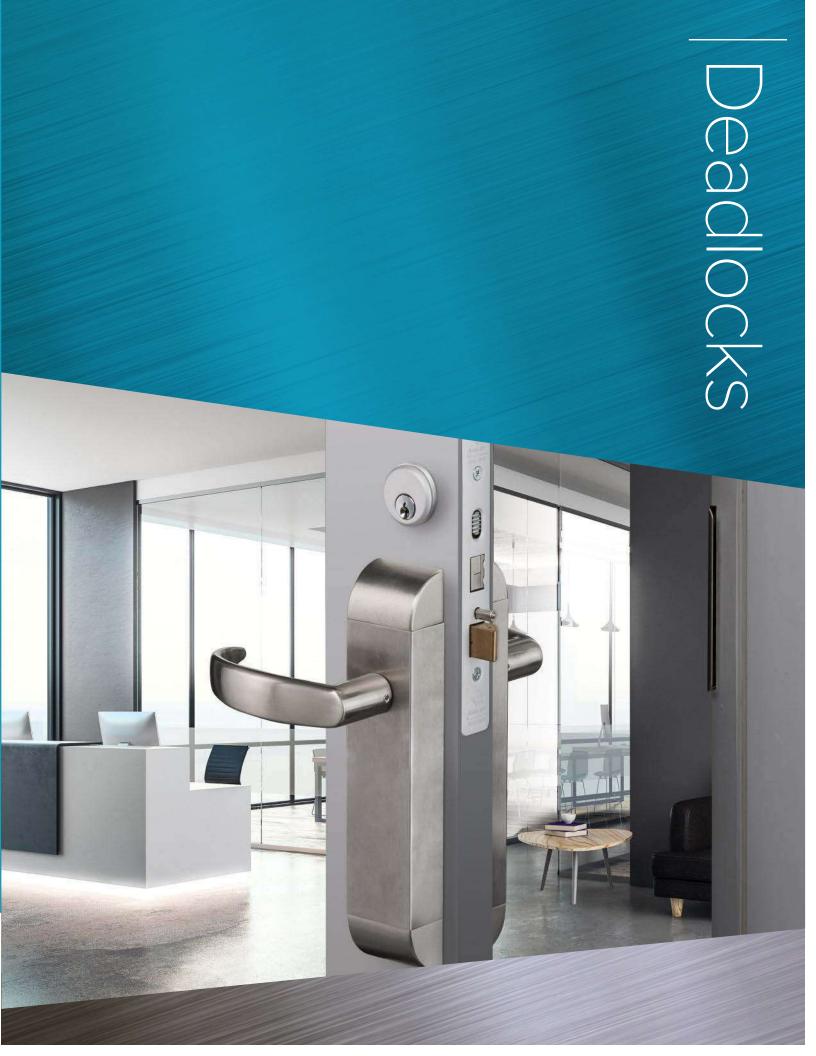







# 1830 Series Swing Bolt Bottom Rail Deadlock

1830 Bottom Rail Deadlock provides bottom rail locking in ultra-narrow stile aluminum or tempered glass doors. Tamper resistant with an armored faceplate, it protects with a minimum threshold strike opening.



### **Function**

For bottom rail locking of ultra-narrow stile or tempered glass doors whose bottom rail (shoe) is too shallow for the MS1861 Bottom Rail Deadbolt. Mechanism is similar to the MS1850S Deadlock, but with the bolt size reduced. This keeps the threshold strike opening to a practical minimum, avoiding collection of debris or snagging on high-heeled shoes. Armored faceplate protects cylinder setscrews from tampering and keeps them from loosening. Not designed for wood door applications.

# Operation

360° turn of key or thumbturn projects or retracts the counterbalanced bolt. Key can be removed only when bolt is in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.

## **Features**

### **Cylinder Height**

31/32" [24.6 mm] and 1-1/8" [28.6 mm] only.

### Case

Measures 1" x 6" x depth [25.4 mm x 152.4 mm x depth] where depth varies with cylinder height. Steel with corrosion-resistant plating.

### **Bolt**

15/32" x 5/8" x 2-1/8" [ 11.9 mm x 15.9 mm x 54.0 mm] with 5/8" [15.9 mm] throw. Six-ply laminated steel with eight plies within case. Center ply has alumina-ceramic core to deter hacksaw attack.

### **Strike**

See back page for dimensions of strike slot which can be cut in metal thresholds, 4006 Strike, shown, available separately with stainless steel trim plate and plastic box.

### **Standard Package**

Individually boxed with mounting screws. Cylinder and/or thumbturn available separately.

### **Shipping weight**


1-1/2 lbs [0.68 kg]

# **Options**


- 4006 Strike, cylinder, thumbturn available separately
- Available in choice of 313 Dark bronze anodized, 628 Clear anodized




# **Dimensions**




### **4006 Strike Dimensions**



# Stile & Threshold Preparation



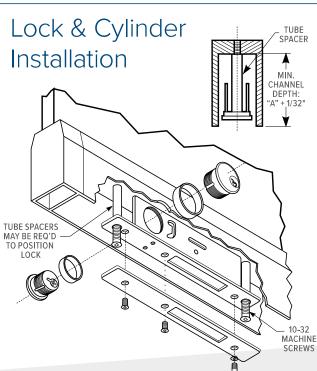

## How to Order & Related Products

1830 Bottom Rail Deadlock (Swingbolt): Specify quantity and the following information. Order related products separately.

PRODUCT NO.	DASH NO. (SPECIFY FOR CYLINDER HEIGHT AND LOCK DEPTH)	F <b>I</b> NISH
1830	-02	-628
-02 Cylinder Height 31/32" Dim. "A" 1-5/8" 313 Dark Bronze And		313 Dark Bronze Anodized
-03 Cylinder Height 1-1/8" Dim. "A" 1-25/32" 628 Clear Anodized		628 Clear Anodized

### **RELATED PRODUCTS**

CYLINDERS	ACCESSORIES
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	4006 strike







# MS1837 Series

# MS® Two-Point Deadlock

Maximum security for wood door pairs is provided with the MS1837 Two-Point Deadlock. A single turn drops a bolt into the threshold and pivots the MS bolt.

### **Function**

Maximum security for wood door pairs is provided by the MS1837 deadlock with a single turn of a key. Simultaneously dropping a stainless steel hexbolt into the threshold and pivoting the massive MS bolt into the opposite leaf, the MS1837 eliminates inconvenient and sometimes forgotten flushbolts in the inactive leaf.

# Operation

360° turn of key or thumbturn projects counterbalanced bolt into opposite door and drops bolt into threshold. Key can be removed only when bolts are in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



Concealed vertical rod not shown

## **Features**

### **Cylinder Backset**

1-1/2" [38.1 mm] only.

### **Cylinder Height**

36" [914.4 mm] standard. Other cylinder heights available on special order, specify exact height from bottom of door to cylinder center. Maximum cylinder height 65" [1651 mm].

### Case

Measures 1" x 6" x 2-3/16" [25.4 mm x 152.4 mm x 55.6 mm]. Steel with corrosion-resistant plate.

### **Pivoted Bolt**

5/8" x 1-3/4" x 2-7/8" [15.9 mm x 44.5 mm x 73.0 mm] with 1-3/8" [34.9 mm] throw. Eight-ply laminated steel with alumina-ceramic core to deter hacksaw attack.

### **Threshold Bolt**

Hexagonal 3/8" [9.5 mm], flat to flat. Stainless steel.

### **Armored Faceplate**

Flat, two-piece plate extends to bottom of door.

### Strike

For MS bolt, a 4001-011 Strike Plate with dust box is furnished. Threshold bolt strike can be 1/2" [12.7 mm] diameter hole in metal threshold or, if threshold is wood, 4005 Strike is available separately.

### Standard Package

MS lock individually boxed with mounting screws. Hexbolt and rod packed separately with face extension plate, screws, bottom bolt guide, and attachment pin. Cylinder and/ or thumbturn available separately.

### **Shipping weight**


3 lbs [1.36 kg]

# **Options**


 Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized, US3 (605) Bright brass, US26D (626) Satin chrome



## **Dimensions**

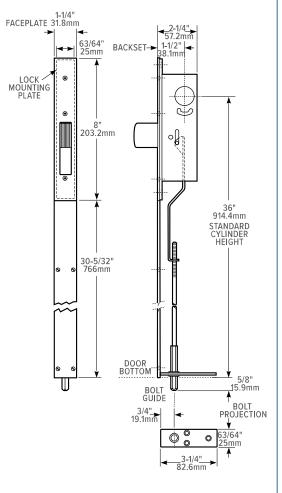

# Installation

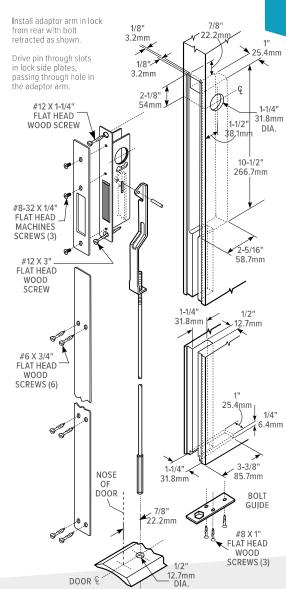

## How to Order & Related Products

MS1837 Two Point Deadlock Specify quantity and the following information. Order related products separately.

PRODUCT NO.	FACEPLATE
MS1837	-313
	313 Dark Bronze Anodized
	335 Black Anodized
	605 Bright Brass
	626 Satin Chrome
	628 Clear Anodized

If cylinder height other than 36" is required, specify exact height from bottom of door to cylinder center.

### **RELATED PRODUCTS**

CYLINDERS	ACCESSORIES
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn MS4043 cylinder guard	4005 Strike for wooden threshold



# MS1847 Series

# MS® Deadlock/Deadlatch

The MS1847 Deadlock/Latch for ultra-narrow stile aluminum sliding doors features a self-protecting bolt with adjustable bolt projection.





### **Function**

A compact lock designed to fit within very narrow sliding door stiles without compromising the high degree of security that these doors need. The sturdy stainless steel bolt has two important features not usually found in sliding door hardware. First, it is adjustable: a full 3/16" [4.8 mm] lengthening or shortening of bolt projection is possible by turning an exposed screw in the face of the lock. This can compensate for considerable misalignment between door and jamb. Second, the bolt is self-protecting: if the door is closed with the bolt in the locked position, the bolt will retract immediately upon contact with the jamb, thus preventing damage or accidental lockout.



Cylinder pulls are available separately for keyed operation. Three hub slot positions allow installation even where jamb and stile design provides severely limited turn clearance.



# **Features**

### Case

Measures 1/2"  $\times$  3-3/16"  $\times$  1-1/8" [12.7 mm  $\times$  80.97 mm  $\times$  28.6 mm]. Stainless steel.

### Bolt

Three-ply laminated stainless steel. Designed to withstand approximately one-half ton of either horizontal or vertical force. Anti-lift bolt stops both door-from-jamb pry bar attacks and attempts to lift the door from its track.

### **Faceplate**

Rectangular face or full radiused ends (see how-to-order table on back of page for dash numbers).

### **Latch Version**

The MS1847-11 and MS1847-13 feature the same stainless steel hookbolt, but the bolt is spring-loaded for automatic latching. All dimensions and available accessories for the MS1847 Deadlocks also apply to MS1847 Deadlatches.

### **Standard Package**

Case-packed with mounting screws. Turn and cylinder pull available separately.


### **Shipping weight**

1/2 lb [0.23 kg].





Deadlatch

# **Dimensions**

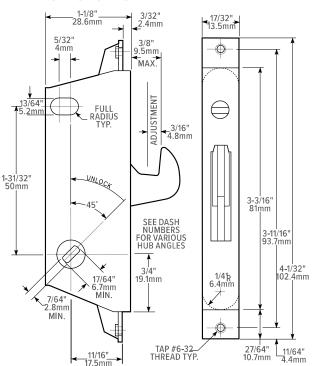

# Stile Preparation





# How to Order & Related Products

MS1847 Deadlock: Specify quantity and the following information. Order related products separately.

MODEL	F	FACE SHAPE, HUB A	NGLE, LOCK OR LAT	CH	BACKSET
MS1847		-(	02		-630
101047	(Blank) Lock	-02 Lock	-06 Lock  SELF- LATCHING	SELF-LATCHING DO O	630 Satin Stainless
	-09 Lock	-10 Lock			

### **RELATED PRODUCTS**

TRIM	CYLINDERS	ACCESSORIES
1000 Series Turn	4024, 4025, 4026 Cylinder Pulls	4800 Strike









X5X only

MS® Prep

# MS1850S, MS1850S-X5X

# Series MS® Deadlocks

The MS1850S Series MS® Deadlock utilizes a laminated stainless steel bolt to provide maximum security for a single leaf narrow stile aluminum door. The MS1850S-X5X Series MS® Deadlock utilizes a laminated stainless steel hookbolt to provide maximum security for a sliding narrow stile aluminum door. Both are activated by a pivot mechanism.



A huge bolt of laminated stainless steel, nearly 3" long, activated by an uncomplicated pivot mechanism, has made the basic **MS1850S**Series MS\* Deadlock the standard of the narrow stile aluminum door industry. The length of this bolt provides maximum security for a single leaf door, even a very tall and flexible one or an installation where the gap between the door and jamb is greater than it should be.

The MS1850S-X5X Series MS® Deadlock answers the security need of sliding narrow stile aluminum doors in commercial, industrial, and institutional buildings. The locking mechanism is identical to the MS1850S Series MS Deadlock, except that the massive laminated bolt is provided in a hook shape to resist the parting motion of sliding door and jamb. The over-center maximum security (MS) locking action assures that forced entry attempts to pry the door in any direction, up, down, or sideways will be defeated.

Special configuration: The 1850S-X2X Series Short Throw

Deadlock utilizes a laminated stainless steel short bolt, activated by a pivot mechanism to secure a single leaf narrow stile aluminum door.

# Operation

360° turn of key or thumbturn projects or retracts the counterbalanced bolt. Key can be removed only when bolt is in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



MS1850S



MS1850S-X5X

MS1850S MS1850S-X5X

Series MS®

**Deadlocks** 

### **Features**

7/8" [22.2 mm], 31/32" [24.6 mm], 1-1/8" [28.6 mm], and 1-1/2" [38.1 mm]. 1850S-X2X not available with 7/8" backset.

Measures 1" x 6" x depth [25.4 mm x 152.4 mm x depth], depth varies by backset (see table on left). Steel with corrosion-resistant plating.

### **Faceplate**

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm].

### **Strike**

See below for dimensions of strike slot which can be cut in metal jamb. Trim plate, box strike, and armored strike are available separately.

### **Bolt**

Eight-ply laminated stainless steel. Center ply has alumina-ceramic core to defeat any hacksaw attack, including rod-type "super" hacksaws.

MS1850S: Standard straight bolt measures 5/8" x 1-3/8" x 2-7/8" [15.9 mm x 34.9 mm x 73.0 mm] with 1-3/8" [34.9 mm] throw.

MS1850S-X5X: Hookbolt measures 5/8" x 1-3/8" [15.9 mm x 34.9 mm] with 13/16" [20.6 mm] throw. Hook shaped bolt repels pry bar attempts to "spread" the door from its jamb or lift it off its track.

**1850S-X2X:** Short bolt measures 5/8" x 1-3/8" x 2-3/8" [15.9 mm x 34.9 mm x 60.3 mm] with 13/16" [20.6 mm] throw.

### Standard Package

Individually boxed with faceplate and mounting screws. Strike plates, cylinders and/ or thumbturns available separately.

### **Shipping Weight**

1-1/2 lbs [0.68 kg].

# **Options**

"SCHOOLHOUSE" version, also available, is modified so that operation from inside is "unlock only". This lock is handed and must be specified LH or RH. Specify SCH1850S or SCH1850S-X5X (for standard or hook), SCH1850S-X2X (for short)...

ARMORED FACEPLATE 1" X 6-7/8"

FLAT MS1850S

RADIUS MS1851S

RADIUS W/ WEATHERSTRIP

LH BEVEL MS1852S-X15


RH BEVEL MS1852S-X16

5/8"

15.9mm 25.4mm

BACKSET	"A"
7/8"	1-9/16"
22mm	34.7mm
31/32"	1-5/8"
24.6mm	41.3mm
1-1/8"	1-25/32"
28.6mm	45.2mm
1-1/2"	2-1/4"
38.1mm	57.2mm

HOW BACKSET IS MEASURED: CYLINDER &






BEVEL

All measurements are approximate and are provided for informational purposes only.

# MS1850S

# **Dimensions**

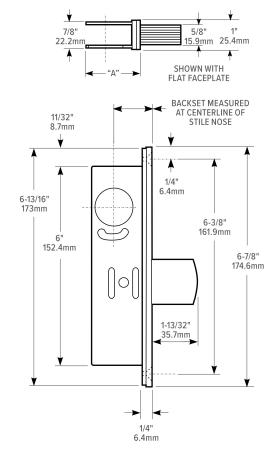


# MS1850S-X5X

# **Dimensions**


7/8'

22.2mm

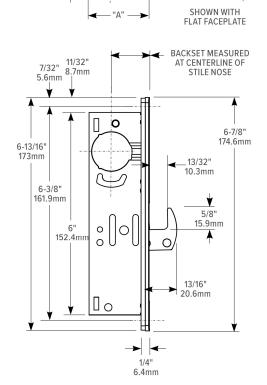


# MS1850S

# Stile Preparation




# Lock & Cylinder Installation

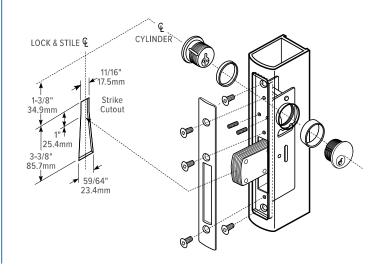


# MS1850S-X5X

# Stile Preparation



# Lock & Cylinder Installation

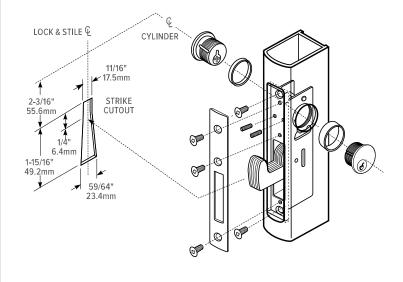



# How to Order & Related Products

MS1850S, MS1850S-X5X Series MS® Deadlock: Specify quantity and the following information. Order related products separately.

PRODUCT NO.	FACEPLATE	BACKSET	BOLT SHAPE	HANDING	FINISH
MS185	0S	-2	1	0	-628
	<b>0S</b> Flat	<b>1</b> 7/8"	1 Straight bolt	O Non-Handed*	313 Dark Bronze Anodized
	1S Radius	<b>2</b> 31/32"	5 Hookbolt	5 LH or RHR	335 Black Anodized
	1SW Radius with weatherstrip	3 1-1/8"		6 RH or LHR	628 Clear Anodized
	2S Bevel	<b>4</b> 1-1/2"			

<sup>&</sup>quot;Any flat or radius faceplate, except Schoolhouse. Select handing for bevel faceplate only. "SCHOOLHOUSE" version, also available, is modified so that operation from inside is "unlock only". This lock is handed and must be specified LH or RH. Specify SCH1850S or SCH1850S-X5X Series. Same faceplate and backset options as MS1850S and MS1850S-X5X Series.

### 1850S-X2X Series Short Throw Deadlock: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	BOLT SHAPE	HANDING	FINISH
185	0S	-2	2	0	-628
	<b>0S</b> Flat	<b>2</b> 31/32"	2 Short Throw	<b>0</b> Non-Handed*	313 Dark Bronze Anodized
	1S Radius	3 1-1/8"		5 LH or RHR	335 Black Anodized
	2S Bevel	<b>4</b> 1-1/2"		6 RH or LHR	628 Clear Anodized

<sup>\*</sup>Any flat or radius faceplate, except Schoolhouse. Select handing for bevel faceplate only. "SCHOOLHOUSE" version, also available, is modified so that operation from inside is "unlock only". This lock is handed and must be specified LH or RH. Specify SCH1850S-X2X. Same faceplate and backset options as MS1850S-X2X.

### RELATED PRODUCTS — MS1850S & MS1850S-X5X

TR <b>I</b> M	CYLINDERS	ACCESSORIES	SPECIAL ORDER OPTIONS
3090-150, 4550 Deadlock Lever	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	4000, 4001, MS4002 Deadlock Strikes 4015 Threshold Bolt, 4016 Header Bolt for multi-point locking. 4085 Header Bolt for pairs of doors Lock mounting accessories and options 4089 Exit Indicator	Schoolhouse function available as special order.











only

MS® Prep

# MS1850SN410, MS1850SN450

# Series MS® Deadlocks

The ANSI size MS1850SN410 Series MS® Deadlock utilizes a laminated stainless steel bolt and the ANSI size MS1850SN450 Series MS Deadlock utilizes a stainless steel hookbolt, both activated by a pivot mechanism to provide maximum security for hollow metal or wood doors.

## **Function**

For hollow metal or wood doors prepared for hardware according to the specifications of the American National Standards Institute (ANSI), the MS1850SN410 Series MS® Deadlock provides maximum security and ease of installation. Its standard 1-1/2" [38.1 mm] backset dimension provides adequate clearance for the deep stop on the door jamb of hollow metal entrances.

The ANSI size MS1850SN450 Series MS® Deadlock provides maximum security and ease of installation for hollow metal or wood sliding doors. Its standard 1-1/2" [38.1 mm] backset dimension provides adequate clearance for the deep jamb "pocket" of many commercial and industrial entrances. The locking mechanism is identical to the widely used MS1850S Series MS Deadlock, except that the massive laminated bolt is provided in a hook shape to resist the parting motion of sliding door and jamb. The over-center maximum security (MS) locking action assures that forced entry attempts to pry the door in any direction, up, down, or sideways will be defeated. Also useful for swinging doors closing against jambs too shallow for the 1-3/8" [34.9 mm] throw of the MS1850SN410 Series MS® Deadlock.

# Operation

360° turn of key or thumbturn projects or retracts the counterbalanced bolt. Key can be removed only when bolt is in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder, available separately or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.





MS1850SN450



### **Features**

### **Backset**

1-1/2" [38.1 mm] available only

### Case

Measures 1" x 6" x 2-1/4" [25.4 mm x 152.4 mm x 57.2 mm]. Steel with corrosion-resistant plating.

### **Bolt**

Eight-ply laminated stainless steel. Center ply has alumina-ceramic core to defeat any hacksaw attack, including rod-type "super" hacksaws.

MS1850SN410: Standard straight bolt measures 5/8" x 1-3/8" x 2-7/8" [15.9 mm x 34.9 mm x 73.0 mm] with 1-3/8" [34.9 mm] throw.

MS1850SN450: Hookbolt measures 5/8" x 1-3/8" [15.9 mm x 34.9 mm] with 13/16" [20.6 mm] throw.Hook shape repels pry bar attempts to "spread" the door from its jamb or lift it off its track.

### **Faceplate**

Measures 1-1/4" x 8" [31.8 mm x 203.2 mm].

### Strike

See below for dimensions of strike slot which can be cut in metal jamb. Lipped, ANSI-spec, and other strike plates available separately.

### **Standard Package**

Individually boxed with faceplate and mounting screws. Strike plates, cylinders and/ or thumbturns available separately.

### **Shipping Weight**

1-1/2 lbs [0.68 kg].

# **Options**

• "SCHOOLHOUSE" version, also available, is modified so that operation from inside is "unlock only". Specify SCH1850SN410 or SCH1850SN450 Series. Same faceplate and backset options as MS1850SN410 or MS1850SN450 Series.


MS1850SN410. MS1850SN450 Series MS® **Deadlocks** 



All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions

# MS1850SN410

### **Dimensions**

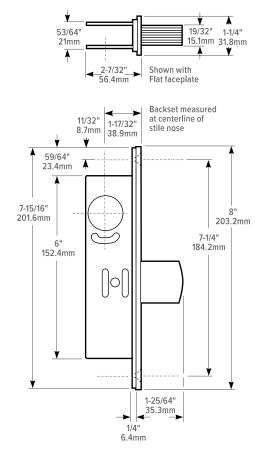



# MS1850S450

2-7/32" \_

56.4mm


## **Dimensions**

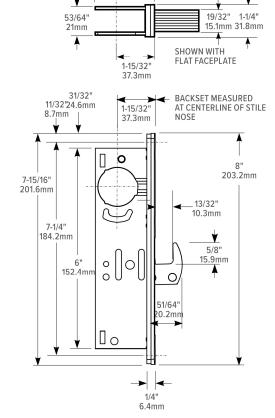






# MS1850SN410




# Lock & Cylinder Installation

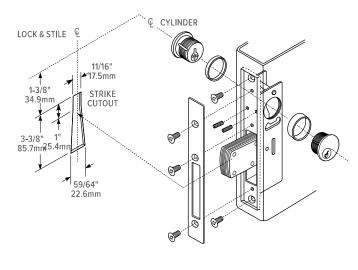

# MS1850S450


# Stile & Wood Preparation

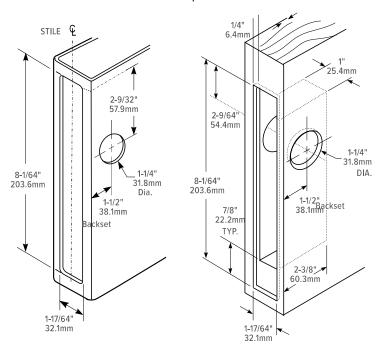



# MS1850S450

# Lock & Cylinder Installation

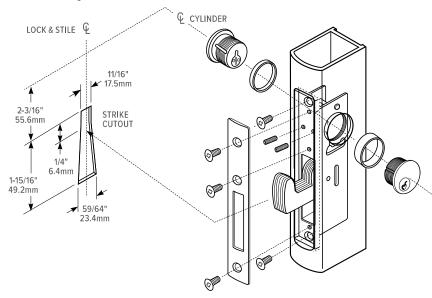

# How to Order & Related Products

MS1850SN410, MS1850SN450 Deadlock: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	ANSI SIZE	BOLT SHAPE	FINISH
MS185	0	SN	410	628
	0 Flat		410 Straight bolt	313 Dark Bronze Anodized
	1 Radius		450 Hookbolt	335 Black Anodized
				628 Clear Anodized

<sup>\*</sup>Any flat or radius faceplate, except Schoolhouse. "SCHOOLHOUSE" version, also available, is modified so that operation from inside is "unlock only". Specify SCH1850SN410 or SCH1850SN450 Series. Same faceplate and backset options as MS1850SN410 or MS1850SN450 Series.

### **RELATED PRODUCTS - MS1850SN410 & MS1850SN450**

TRIM	CYLINDERS	ACCESSORIES	SPECIAL ORDER OPTIONS
3090-150, 4550 Deadlock Lever	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	4000, 4001, MS4002 Deadlock Strikes 4015 Threshold Bolt, 4016 Header Bolt for multi-point locking. 4085 Header Bolt for pairs of doors Lock mounting accessories and options 4089 Exit Indicator	Schoolhouse function available as special order.



# MS1861 Series

# MS® Bottom Rail Deadbolt









MS1861 Bottom Rail Deadbolt provides maximum security with MS deadbolt locking mechanism. It utilizes hardened steel bolts for the limited space of ultra-narrow stile doors.



### **Function**

The MS1861 lies horizontally in the bottom rail of ultra-narrow stile doors which have insufficient vertical space for a lock, or tempered glass doors which have no stile at all. The hardened steel cylindrical bolts allow simple drilled strike holes of a relatively small size to minimize the nuisance and danger presented by some threshold strikes in collecting debris or snagging on high-heeled shoes. MS1861-02 locks either single-leaf or pairs of doors. Not recommended for wood doors.

# Operation

360° turn of key or thumbturn projects or retracts bolt(s). Key can be removed only when bolts are in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.

## **Features**

### **Cylinder Backset**

Minimum backset is approximately 2-1/4" [57.2 mm] for the MS1861- 01 configuration with vertical bolt only. The MS1861-02 configuration with both vertical and horizontal bolts requires placement of cylinder center line 5-3/4" [146.1 mm] from nose of door. Both have cylinder center 1-7/8" [47.6 mm] above bottom edge of door.

### Case

Measures 1"  $\times$  6"  $\times$  1-13/16" [25.4 mm  $\times$  152.4 mm  $\times$  46.0 mm]. Steel with corrosion-resistant plating.

### **Bolt**

3/8" [9.5 mm] diameter. Stainless steel vertical threshold bolt has 13/16" [20.6 mm] throw. Hardened steel horizontal bolt has 1-1/8" [28.6 mm] throw.

### **Strike**

In metal installation, 7/16" [11.1 mm] drilled holes in threshold are required. For MS1861-02 configuration with both vertical and horizontal bolts, drilled holes are also required in jamb or opposite door.

### Standard Package

Individually boxed with mounting screws. Cylinder and/or thumbturn available separately. If required, tube spacers are available separately.

### Shipping weight

MS1861-01: 1-3/4 lbs [0.79 kg], MS1861-02: 2 lbs [0.91 kg]

# **Options**

- Vertical bolt only (-01)
- · Vertical and horizontal bolts (-02)





# **Dimensions**

Refer to the product Installation Instructions

Unit illustrated is MS1861-02. (Both horizontal & vertical bolts included.) Part number for vertical bolt operation only is MS1861-01. Conversion Kit no.

4014 available to convert MS1861-01 to MS1861-02.




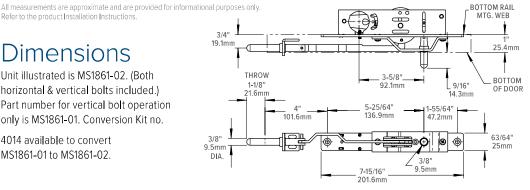


# 4014 Conversion Kit

To convert MS1861-01 to MS1861-02, 4014 Conversion Kit provides horizontal bolt assembly with guide and attachment fittings.


To assemble, press pin through disc and arm.

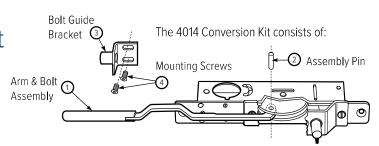

# Rail Preparation



# Lock & Cylinder Installation



# How to Order & Related Products

MS1861 Series MS® Bottom Rail Deadlock: Specify quantity and the following information. Order related products separately.

MODEL	BOLT OPERATION	FINISH	PACKAGING
MS1861	-01	-603	-IB
	01 Vertical Bolt Only	603 Zinc plated steel	IB Individually Boxed
	02 Vertical and Horizontal Bolts		

If tube spacers are required, specify QUANTITY and LENGTH..

### **RELATED PRODUCTS**

CYLINDERS	ACCESSORIES
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn	4014 Conversion Kit for multi-point locking. MS1861 may be ordered with vertical and horizontal bolts (Bolt Operation option 2).
MS4043 Cylinder guard	Tube spacers (26-00090XX)"



# 1875

# Two-Point Deadlock



1875 Two-Point Deadlock provides security for roll-up doors, security screens, or similar doors. Two-point locking is achieved using two bolts, which are operational from either or both sides of the deadlock.



### **Function**

For overhead doors, roll-up security screens, or similar doors. Provides turn operation of two bolts from either or both sides. Accepts standard mortise cylinders for key control of bolts to secure them in either projected or retracted position.

# Operation

90° rotation of turn projects or retracts bolts. 360° turn of key deadlocks mechanism, preventing operation of the turn in either locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.

## **Features**

### Cylinder Backset

Bolt arms require inside stile clearance of 1-11/16" [42.9 mm] on one side of cylinder center, 1" [25.4 mm] on the other.

### Case

Measures 1" x 6" x 2-5/8" [25.4 mm x 152.4 mm x 66.7 mm]. Steel with corrosion-resistant plating.

### **Bolt Arms**

1-1/32" [26.2 mm] throw. Threaded for 1/4" – 20 rods. Because of design variations in this type of door, no standard bolt can be offered to fit all makes of doors. Please contact factory for more information on bolts, rods, bolt guides, and strikes to fit individual door designs.

### Turn

**4060 Turn:** Available separately. Zinc alloy escutcheon and handle. Available in 130 to match 628 Clear Anodized finish. Steel spindle is also available to accommodate various door thicknesses.

### Standard Package

Individually boxed. Cylinder and/ or thumbturn available separately.

### **Shipping weight**


1-1/2 lbs [0.68 kg]


# **Options**

- 4060 Turn available separately with choice of spindle lengths
- Bolt, connecting rod, bolt guide, strike available separately by special order







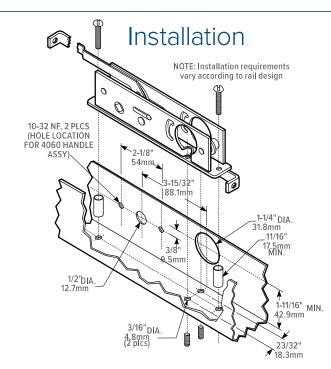

# How to Order & Related Products

1875 Two Point Deadlock: Specify quantity and the following information. Order related products separately.

MODEL	PACKAGING
1875	-IB
	IB Individually Boxed

4060 Turn: Specify quantity and the following information. Order related products separately.

MODEL	DOOR THICKNESS	FINISH		
4060	-05	-130		
	<b>05</b> 1-1/2"			
	06 1-3/4"	130 To match 628 Clear Anodized		
	<b>07</b> 2"			

CYLINDERS		ACCESSORIES	SPECIAL ORDER OPTIONS
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn	MS4043 Cylinder guard	4060 Turn	31-0278-XX Bolt and Connecting Rod Assembly by special order only.









# MS+1890 Series

# MS® Deadlock/Deadlatch

MS+1890 Series MS Deadlock/Deadlatch provides a maximum security deadlock for after hour and traffic control with deadlatch convenience during business hours.

### **Function**

Maximum security MS+ deadlock after hours, plus the convenience of traffic control management during the business day. Typical installation is a bank or store requiring three modes of door control:

- 1. Both lock and latchbolts retracted for unrestricted entry and exit during business hours
- 2. Handle-operated latch for exit-only traffic just after closing
- 3. Maximum security MS hookbolt for overnight lockup. When using trim (available separately) to activate, handle or paddle operates latchbolt only.

# Operation

360° turn of key or thumbturn projects or retracts the hookbolt. 120° further turn retracts latchbolt as well. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder, or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides. When using trim (available separately) to activate, handle retracts springloaded latchbolt only. For door thickness other than 1-3/4", please contact factory.

## **Features**

### **Cylinder Backset**

31/32" [24.6 mm], 1-1/8" [28.6 mm], or 1-1/2" [38.1 mm].

Measures 1" x 7-3/8" x depth [25.4 mm x 187.3 mm x depth], depth varies by backset (see table on back of page). Steel with corrosion-resistant plating.

Deadlock bolt: 5/8" x 1-3/8" [15.9 mm x 34.9 mm] with 13/16" [20.6 mm] throw. Eight-ply laminated stainless steel. Center ply has aluminaceramic core to defeat any hacksaw attack, including rod-type "super" hacksaws, while hook shape repels pry bar attempts to "spread" the door from its jamb or lift it off its track.

Latchbolt: Measures 5/8" x 5/8" [15.9 mm x 15.9 mm] with 7/16" [11.1 mm] throw. Zinc alloy with Delrin

face for smooth, quiet action. Handing easily reversible. Bolt can be held fully retracted to allow door to be free swinging (see illustration on back of page).

### Strike

Armored strike with satin stainless steel trimplate with steel mounting plate and dust box. Flat strike furnished. Also available for pairs of doors in radius shape, or flat with square corners for ANSI hollow metal jambs. Flat strikes also available with longer lip.

MS+1890 Deadlock/Latch cannot be used with electric strikes.

### Standard Package

Individually boxed with strike and machine screws for mounting. Cylinder and/or thumbturn available separately.


### Shipping weight

2 lbs [.91 kg]


# **Options**

- Handle, paddle available separately for one side only or both sides. Handles, paddles on both sides solve, with minimum traffic impediment, the problem of doors that stand ajar due to wind or air-conditioning pressures.
- · Available in right hand or left hand configurations
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized







# Jamb Preparation




Series MS® Deadlock/ **Deadlatch** 



# Latch/Lock, Cylinder



## Latch Holdback Instructions



# Stile Preparation

"A"

1-25/32

45.2mm

2-1/4" 57.2mm

HOW BACKSET

CYLINDER €


FLAT

BACKSET

31/32" 24.6mm

1-1/8"

28.6mm



# How to Order & Related Products

MS+1890 Series MS® Deadlock/Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	STRIKE SHAPE/LIP LENGTH	HANDING	FINISH
MS+189	S+189 1		02	6	-628
	<b>0</b> Flat	<b>2</b> 31/32"	01 Flat/Standard Jamb	5 LH or RHR	313 Dark Bronze Anodized
	1 Radius	3 1-1/8"	02 Radius/Standard Stile	6 RH or LHR	335 Black Anodized
	1W Radius with weatherstrip	<b>4</b> 1-1/2"	17 Flat/Center Hung 4" Jamb		628 Clear Anodized
	2 Bevel		21 Flat/Center Hung 4-1/2" Jamb		
	3 Without faceplate, without strike plate				

For door thickness other than 1-3/4", contact factory.

### **RELATED PRODUCTS**

TRIM	CYLINDERS	ACCESSORIES
4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Deadlatch Paddles.	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	Trim strikes, including 4505 armored strike. 4089 Exit Indicator





# MS1950P, MS1950P-X5X Series

# MS® Deadlocks

The fully stainless steel MS1950P Series MS Deadlock utilizes a laminated stainless steel bolt, now with enhanced security features to provide maximum security for a single leaf aluminum door.

The fully stainless steel MS1950P-X5X Series MS Deadlock utilizes a laminated stainless steel hookbolt, now with enhanced security features to provide maximum security for a sliding aluminum door.

Both are activated by a pivot mechanism.

### **Function**

A 3" laminated stainless steel bolt and complete stainless steel construction makes the heavy duty MS1950P MS° Deadlock a higher security, premium locking solution for swinging doors.

The MS1950P is compatible with header and threshold bolts to accommodate multi-point locking in a double door application.

The stainless steel hookbolt of the MS1950P-X5X Series MS\* Deadock answers the security need of sliding doors. The hook shaped bolt resists the parting motion of sliding door and jamb.

# Operation

For ingress, a 360° turn of the key or thumbturn on the exterior cylinder retracts the counterbalanced bolt. While the bolt is retracted the door acts as a passage function, until the deadlock is re-locked from either side of the opening. Typically, if the door remains unlocked during business hours, the interior side is equipped with a mortise cylinder and indicator to allow for flexible traffic control by management. An interior thumbturn to lock the bolt and a 4550 lever can also be installed on the interior side to ensure free egress & ADA compliance.

Key can be removed only when bolt is in a locked or unlocked state. Lock body accepts a mortise cylinder, thumbturn, 4089 indicator, or 4550 deadlock lever from either side.







### **Features**

### **Cylinder Backset**

31/32" [24.6 mm], 1-1/8" [28.6 mm], or 1-1/2" [38.1 mm] only.

### Case

Measures 1" x 6" x depth [25.4 mm x 152.4 mm x depth], depth varies by backset (see table left). Fully stainless steel case and internal components. Internal stainless steel plate for enhanced security.

### **Bolt**

Eight-ply laminated stainless steel. Center ply has alumina-ceramic core to defeat any hacksaw attack, including rod-type "super" hacksaws.

MS1950P Bolt: Standard straight bolt measures 5/8" x 1-3/8" x 2-7/8" [15.9 mm x 34.9 mm x 73.0 mm] with 1-3/8" [34.9 mm] throw.

MS1950P-X5X Bolt: 5/8" x 1-3/8" [15.9 mm x 349.9 mm] with 13/16" [20.3 mm] throw. Hook shape repels pry bar attempts to "spread" the door from its jamb or lift it off its track.

### **Faceplate**

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm].

### Strike

See next page for dimensions of strike slot which can be cut in metal jamb. Trim plate, box strike, and armored strike are available separately.

### Standard Package

Individually boxed with machine screws for mounting. Cylinders and/or thumbturns available separately.

### **Shipping weight**

1-1/2 lbs. [0.68 kg]

# **Options**


• "SCHOOLHOUSE" version, also available, is modified so that operation from inside is "unlock only". This lock is handed and must be specified LH or RH. Specify Series SCH1950, (-X5X). Same faceplate and backset options as Series MS1950P, (-X5X).

MS1950P-X5X Series MS® **Deadlocks** 

ARMORED FACEPLATE 1" X 6-7/8"
FLAT MS1950P
RADIUS MS1951P
KADIOS MISISSII
RADIUS W/ WEATHERSTRIP
MS1951WP
LILI DEVEL MC40EOD V4E
LH BEVEL MS1952P-X15
RH BEVEL MS1952P-X16


All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions

# MS1950P **Dimensions**

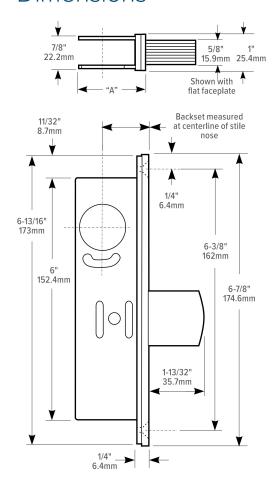

# MS1950P-X5X


# **Dimensions**

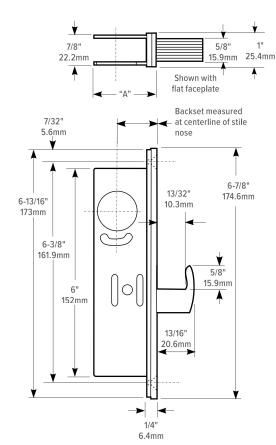

31/32"	1-5/8"
24.6mm	41.3mm
1-1/8"	1-25/32"
28.6mm	45.2mm
1-1/2"	2-1/4"
38.1mm	57.2mm


"A"

BACKSET







# MS1950P Stile Preparation




# Lock & Cylinder Installation

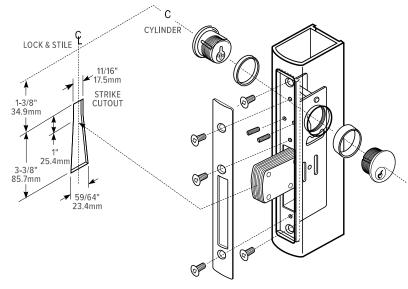

# MS1950P-X5X Stile Preparation



# Lock & Cylinder Installation

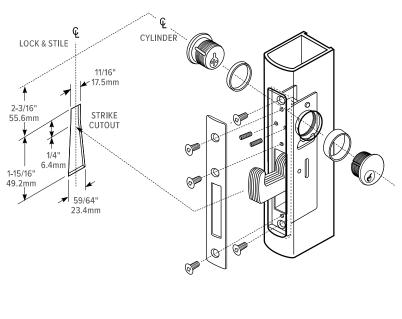

# How to Order & Related Products

MS1950P, MS1950P-X5X Series MS® Deadlock: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	BOLT SHAPE	HANDING	FINISH
MS195	0P	-2	1	О	-628
	OP Flat	<b>2</b> 31/32"	1 Straight bolt	O Non-Handed*	313 Dark Bronze Anodized
	1P Radius	3 1-1/8"	5 Hookbolt	5 LH or RHR	335 Black Anodized
	<b>1WP</b> Radius with weatherstrip			6 RH or LHR	628 Clear Anodized
	2P Bevel				
	3P Without faceplate, without strike plate				

<sup>\*</sup>Any flat or radius faceplate, except Schoolhouse. Select handing for bevel faceplate only.

### **RELATED PRODUCTS**

, , , , , , , , , , , , , , , , , , , ,	,		
TRIM	CYLINDERS	ACCESSORIES	SPECIAL ORDER OPTIONS
3090-150, 4550 Deadlock Lever	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	4000, 4001, MS4002 Deadlock Strikes 4015 Threshold Bolt, 4016 Header Bolt for multi-point locking. 4085 Header Bolt for pairs of doors Lock mounting accessories and options 4089 Exit Indicator	Schoolhouse function available as special order.











# Dual Force® 2190, 2290

# Series Interconnected Deadbolt/Deadlatch

The 2190 Series Interconnected Deadbolt/Deadlatch provides access control and security for narrow stile aluminum (2190), hollow metal and wood doors (2290). Deadlatch and deadbolt capabilities are combined for fast, easy, and panic-proof exiting.

### **Function**

The Dual Force combines the access control capabilities of a latch with the security of a deadbolt. The key retracts and extends the deadbolt and deadlatch from either side. The exterior lever retracts the latch only. With the deadbolt projected, a simple turn of the inside lever retracts both the latch and deadbolt simultaneously, providing single-motion, panic-proof exiting. The Dual Force is available with electrified trim set for easy integration into an existing access control system. Standard and electrified trim sets are for out-swinging doors only; low profile trim set designed for in-swinging doors only.

# Operation

Key or thumbturn projects or retracts deadbolt or deadlatch. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS\* cam such as the 4036 Mortise Cylinder, available separately. Lock accepts cylinder from either or both sides.

Inside lever retracts both deadbolt and deadlatch when configured with interconnect feature. Outside lever retracts latch only. Latch holdback feature activated or deactivated by turning key to retract latch. Sliding holdback button on faceplate down will holdback latch and sliding up will release. The 2190 Series Interconnected Deadbolt/Deadlatch are designed to operate with the uniquely designed strike plate that comes standard in the package from the factory.



### **Features**

### **Cylinder Backset**

1-1/8" [28.6 mm] or 1-1/2" [38.1 mm] only.

### Bolt

Latchbolt: 5/8" [15.9 mm] throw of solid brass. Easily reversible using only a screwdriver. Deadbolt: 1" [25.4mm] throw of stainless steel.

### **Auxiliary Deadlatch Pin**

Stainless steel. Deadlocks latchbolt to prevent "loiding" or case-knife entry.

### **Faceplate**

Includes faceplate system that adapts to flat, radius, or beveled door edge.

2190: Measures 1" x 6-7/8" [25.4 mm x 174.6 mm]. Radius with weatherseal faceplate available separately.

2290: Measures 1-1/4" x 8" [31.8 mm x 203.2 mm].

### Strike

The Dual Force 2190, 2290 Interconnected Deadbolt/Deadlatch will not operate without its specially designed strike, included standard in package.

2190: Standard strike furnished is the 2101-01 Strike for flat jamb where door closes flush or nearly flush. The 2101 Strike covers MS® Deadlock strike preparation with modification, and the 4901 Deadlatch Strike directly. Also available in radius version for opposite stile pairs of doors and with extended lip strikes for special jamb conditions.

2290: Standard strike furnished is the 2206 (ASA) Strike for flat jamb where door closes flush or nearly flush.

### Inter Connection

Field-selectable inter-connection feature allows interior trim to retract deadbolt and deadlatch. Consult local authority having jurisdiction (AHJ) for guidance in code compliance. 1-3/4" [44.5 mm] minimum door thickness required.

• 2190 retrofits to existing MS1850S Deadlock or 4500 and 4900 Deadlatch of the same backset.

### Standard Package

Individually boxed with trim as specified, strike and machine screws for mounting. Cylinder available separately.

### **Shipping Weight**

9 lbs [4.08 kg].

### Electrical

### **Electrified Trim Options**

Electrified trim set is designed for easy integration into an existing access control system. Dual-voltage 12/24 VDC rated for continuous duty operation. Energizing the trim set allows the exterior lever to be turned to retract the latch only.

The electrified option is not available for low profile trim (trim option 3). Dual Force 2190/2290 Electrification Kit EK-2190 available separately for field-installation into the exterior standard trim set.

# **Options**

- · Specify trim option, lever style, finish, and strike.
- Thick Door Kits (2190-TDKXX) available separately. Specify door thickness.
- · Request to Exit REX-4600 switch available separately for small format low profile trim set.
- Available in choice of US3 (605) Bright brass, US4 (606) Satin brass, 10B powder coat to match dark bronze, US32 (629) Bright stainless, or US32D (630) Satin stainless.


# Options & Accessories


OPTION	DESCRIPTION   SHORT
Standard Series 01	Standard lever, curved
Standard Series 02	Standard lever, round
Standard Series 03	Standard lever, square
Aventura Series ME	Studio Collection designer lever
Aventura Series MG	Studio Collection designer lever
Aventura Series MI	Studio Collection designer lever
Aventura Series MW	Studio Collection designer lever
Centro Series MD	Studio Collection designer lever
Centro Series MJ	Studio Collection designer lever
Odeon Series MN	Studio Collection designer lever
Odeon Series MV	Studio Collection designer lever



All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.

# 2190 Dimensions







5/8"

15.9mm


# Stile Preparation

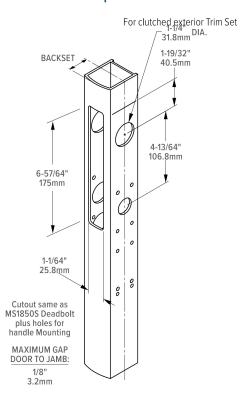






HOW BACKSET IS MEASURED:

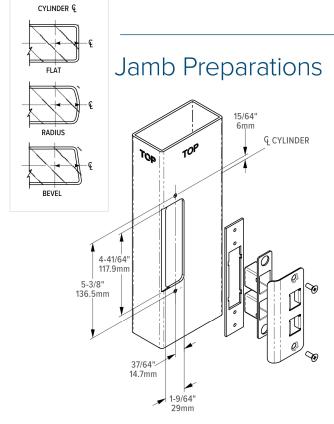


# 2101 Strike (covers and previous cutout for MS® Deadbolt) — Retrofits 4901 and 4501 strike preparations.


# Latch/Lock, Cylinder & Level Installation

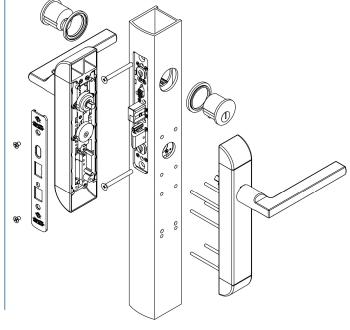


# 2190 Dimensions

Handles in the Designer Series do not have this same feature. Please verify with local code requirements to ensure compliance.

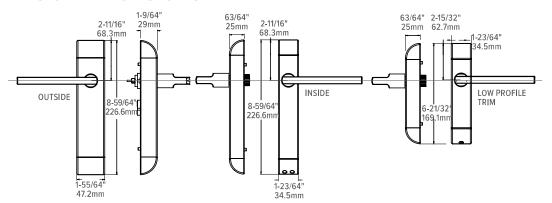

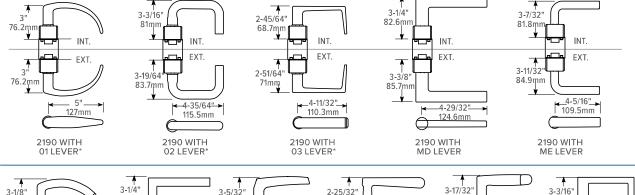

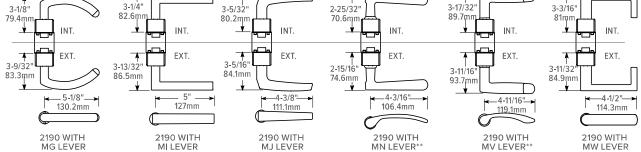

<sup>\*\*</sup> Handed

# How to Order & Related Products

2190 Interconnected Deadbolt/Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	BACKSET	STRIKE	FACEPLATE FINISH	TRIM	HANDLE DESIGNATION		TRIM AND HANDLE FINISH		
2190	-3	1	1	<b>-</b> 1		01		32D	
	3 1-1/8"	<b>0</b> None	1 Clear Anodized 628	0 None	00 No Handle		03 Bright Brass (US3)		
	<b>4</b> 1-1/2"	1 Standard Flat	2 Dark Bronze Anodized 313	1 With Trim Set	STANDARD SERIES:		<b>04</b> Satin Brass (US4)		
		2 Radius Strike	3 Black Anodized 335	2 With Electrified Trim Set	01 Curve	02 Round	<b>03</b> Sqt	uare	10B to match Dark Bronze
				3 Low Profile Trim	DESIGNER SERIES:		32 Bright Stainless (US32)		
					MD	MG	MJ	MV	32D Satin Stainless (US32D)
					ME (Handed)	МІ	MN	MW	


### **RELATED PRODUCTS**

		· · · · · · · · · · · · · · · · · · ·
CYLINDERS	ACCESSORIES	ELECTRIFICATION
Standard 1" length, 1-5/32" diameter mortise cylinder with MS* cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	2190-TDK Thick Door Kit for standard exterior trim set, TDK-4600 Thick Door Kit for low profile trim set.	EK-2190 Electrification Kit. 2190 may be ordered with electrified trim (trim option 2).




All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.

# 2290 Dimensions

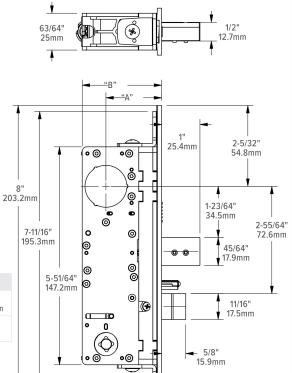

# Stile Preparation

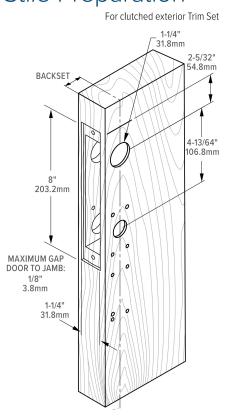

### BACKSET "A" "B" 28.6mm 28.6mm 45.2mm 2-1/8" 1-1/2" 1-1/2" 38.1mm 54mm


ARMORED FACEPLATE 1-1/4" X 8"

FLAT (included)


FPK-0066-OX-XXX












# Latch/Lock, Cylinder & Level Installation

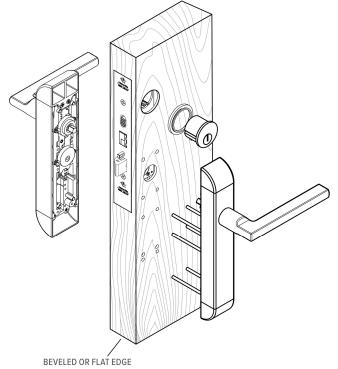





# 2290 Dimensions


Handles in the Designer Series do not have this same feature. Please verify with local code requirements to ensure compliance.

\* The 2290-01, -02, and -03 lever handles are

designed to return within 1/2" of the door face.

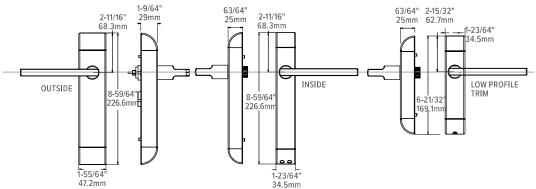

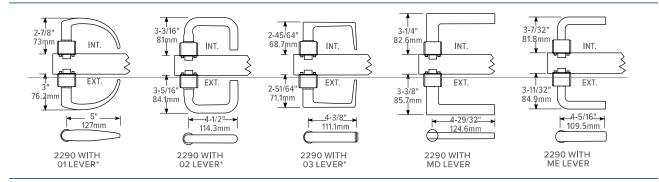

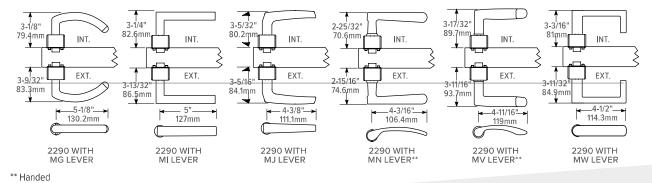

# How to Order & Related Products

2290 Interconnected Deadbolt/Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	BACKSET	STRIKE	FACEPLATE FINISH	TRIM	HANDLE DESIGNATION		TRIM AND HANDLE FINISH	
2290	-3	1	1	-1	01		32D	
	<b>3</b> 1-1/8"	<b>0</b> None	<b>0</b> US to match trim finish	0 None	00 No Handle		03 Bright Brass (US3)	
	<b>4</b> 1-1/2"	1 Standard Flat	1 Clear Anodized 628	1 With Trim Set	STANDARD SERIES:		04 Satin Brass (US4)	
			2 Dark Bronze Anodized 313	2 With Electrified Trim Set	01 Curve 02 Round 03 Square		10B to match Dark Bronze	
			3 Black Anodized 335	3 Low Profile Trim	DESIGN	DESIGNER SERIES:		32 Bright Stainless (US32)
					MD MG MJ MV		32D Satin Stainless (US32D)	
					ME (Handed) MI MN MW			

# **RELATED PRODUCTS**

CYLINDERS	ACCESSORIES	ELECTRIFICATION
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard	2190-TDK Thick Door Kit for standard exterior trim set, TDK-4600 Thick Door Kit for low profile trim set.	EK-2190 Electrification Kit. 2190 may be ordered with electrified trim (trim option 2).









# 2331 Heavy Duty Deadbolt

2331 Heavy Duty Deadbolt provides a heavy duty deadbolt lock that expands into the strike for heavy duty hollow metal or wood applications.

# **Function**

A heavy duty deadbolt for hollow metal or wood sliding doors, the 2331 Heavy Duty Deadbolt throws a massive brass bolt into its strike, then expands two stainless steel dogs to secure the door. A single turn of the key expands or retracts the bolt. There is no latch action.



360° turn of key or thumbturn extends and projects or retracts and withdraws the bolt. Key cannot be removed unless bolt is positively locked or totally retracted. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder or thumbturn with special cam dimensions. Lock accepts cylinder from either or both sides.



# **Features**

# **Cylinder Backset**

1-3/4" [44.5 mm] only.

### Case

Measures 7/8" x 3-5/8" x 2-5/8" deep [22.2 mm x 92.1 mm x 66.7 mm]. Zinc alloy.

### **Bolt**

Brass with stainless steel dogs, 1/2" x 1-1/2" [12.7 mm x 38.1 mm] with 3/4" [19.1 mm] horizontal throw and 11/32" [8.7 mm] expansion above and below main bolt.

### **Strike**

1/8" x 1" x 4-11/16" [3.2 mm x 25.4mm x 119.1 mm] with 5/8" x 1-5/8" [15.9 mm x 41.3 mm] opening. Brass, with four-screw mounting. Trim finish same as faceplate.

## **Armored Faceplate**

Measures 1"  $\times$  5-3/4" [25.4 mm  $\times$ 146.1 mm]; Flat faceplate of brass. Available in a variety of finishes.

### **Special Cylinder Cam**

Operable by any standard mortise cylinder with special cam dimensions. Cylinders with such cams can be readily obtained from most cylinder manufacturers. See CYLINDERS & ACCESSORIES section for cylinder make, thumbturn and trim ring information.

### Standard Package

Individually boxed with strike and wood screws for mounting lock and strike. Cylinder and/or thumbturn available separately.

# Shipping weight


2 lbs [.91 kg].

# **Options**


 Available in choice of US3 Polished Brass (605), US26 Bright Chrome (625), US26D Satin Chrome (626), 121 to match 313 Dark bronze anodized.




# **Dimensions**

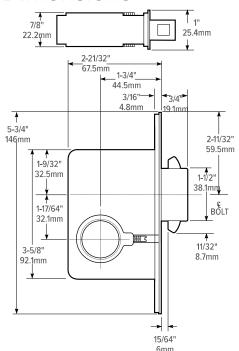

# Wood Door Preparation



Lock & Cylinder Installation

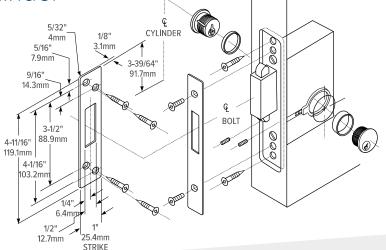

# How to Order & Related Products

2331 Heavy Duty Deadbolt: Specify quantity and the following information. Order related products separately.

MODEL	FINISH		
2331	-626		
	121 To match 313 Dark Bronze Anodized		
	<b>605</b> Bright Brass		
	625 Bright Chrome		
	626 Satin Chrome		

### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

Standard 1" length, 1-5/32" diameter mortise cylinder with special 2331 cam, such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard.



# 4070 Series

# Short Throw Deadbolt (Projection Style)





4070 Short Throw Deadbolt provides security for a conventionally projected bolt in installations where the longthrow MS® Deadlock cannot be used. The smaller 4070 deadbolt offers the longest practical throw from a narrow stile.

# **Function**

For installation where the long-throw MS® Deadlock cannot be accommodated, the smaller 4070 deadbolt offers the longest practical throw for a conventionally projected bolt from a narrow stile. Operates with one-half key turn of any standard mortise type cylinder or cylinder type thumbturn. This product is not designed for use in bottom rail.

# Operation

180° turn of key or thumbturn projects or retracts the bolt. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder or thumbturn with special cam dimensions. Lock accepts cylinder from either or both sides.



# **Features**

### **Cylinder Backset**

7/8" [22.2 mm], 31/32" [24.6 mm], or 1-1/8" [28.6 mm] only.

### Case

Measures 1" x 6" x depth [25.4 mm x 152.4 mm x depth], depth varies by backset. Steel with corrosion-resistant plating.

5/8" x 1-1/4" x 5/8" [15.9 mm x 31.8 mm x 15.9 mm] throw.

### **Strike**

In metal installations, a slot in door jamb serves as strike. 4170 Trim Strike is available separately for wood installations.

### **Faceplate**

Measures 1" x 5-9/16" [25.4 mm x 141.3 mm].

## **Special Cylinder Cam**

Operable by any standard mortise cylinder with special cam dimensions. Cylinders with such cams can be readily obtained from most cylinder manufacturers. See CYLINDERS & ACCESSORIES section for cylinder make, thumbturn and trim ring information.


# Standard Package


Individually boxed with machine screws for mounting. Cylinder and/ or thumbturn available separately.


### Shipping weight

1 lb [0.45 kg].




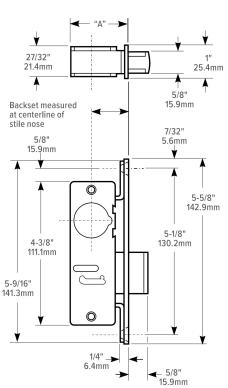








# **Door Preparation**



# Lock & Cylinder Installation







BACKSET	"A"
7/8"	1-37/64"
22.2mm	40.1mm
31/32"	1-5/8"
24.6mm	41.3mm
1-1/8"	1-25/32"
28.6mm	45.2mm

# How to Order & Related Products

4070 Short Throw Deadbolt (Projection Style): Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	HANDING	FINISH
407	2	-2	6	-628
	<b>0</b> Flat	<b>1</b> 7/8"	O Non-Handed*	313 Dark Bronze Anodized
	1 Radius	<b>2</b> 31/32"	5 LH or RHR	335 Black Anodized
	2 Bevel	3 1-1/8"	6 RH or LHR	628 Clear Anodized
	3 Without faceplate, without strike plate			

<sup>\*</sup>Select handing for bevel faceplate only.

### **RELATED PRODUCTS**

CYLINDERS	ACCESSORIES
Standard 1" length, 1-5/32" diameter mortise cylinder with special 4070 cam, such as 4036 Mortise Cylinder, 4066 Thumbturn; MS4043 Cylinder Guard.	4170 trim strike for wood installations







# Deadlock/Deadlatch

5017 Deadlock/Latch provides the strength and deeper backset required to secure sliding wood doors.

# **Function**

For wood framed sliding doors, the compact 5017 Wood Door Deadlock/Latch provides the same 1000 lbs strength that the MS1847 Deadlock/Latch provides for metal stiles. A deeper backset clears the recessed jamb used with wood doors. The sturdy stainless steel bolt has two important features not usually found in sliding door hardware. First, it is adjustable: a full 3/16" [4.8 mm] lengthening or shortening of bolt projection is possible by turning an exposed screw in the face of the lock. This can compensate for considerable misalignment between door and jamb. Second, the bolt is self-protecting: if the door is closed with the bolt in the locked position, the bolt will retract immediately upon contact with the jamb. This automatic latch can prevent damage or accidental lockout.



# Operation

45° rotation of turn or key projects or retracts bolt. Bolt is self- protecting: if door is shut while bolt is extended, it will retract, preventing damage or accidental lock-out. Cylinder pulls available separately for keyed operation.

# **Features**

# **Cylinder Backset**

1-3/16" [30.2 mm]; 1-1/4" [31.8 mm] including faceplate.

### Case

Measures 1/2" x 4" x 1-19/32" deep [12.7 mm x 101.6 mm x 40.5 mm deep]. Stainless steel.

### **Bolt**

Three-ply laminated stainless steel. Designed to withstand approximately one-half ton of either horizontal or vertical force. Anti-lift bolt stops both door-from-jamb pry bar attacks and attempts to lift the door from its track.

# Cylinder Pull

(4026 Pull) Five pin tumbler cylinder in zinc alloy housing. Standard finish 130 Satin Aluminum.

### Lock

Stainless steel, 5/8" x 4-1/2" [15.9 mm x 114.3 mm] with radiused ends.

## Mounting

By through-bolts, which also secure the inside turn and outside cylinder when installed.

### Turn

1015 Turn available with 1016 blank plate shown for doors from 5/6" [21.2 mm] to 2-1/4" [57.2 mm] thickness.

Without blank plate turn available (for use with cylinder pull) on doors from 1-7/16" [36.5 mm] to 2" [50.8 mm] thickness. Standard finish 130, Satin Aluminum enamel.

### Standard Package

Cylinder pull available separately.

# Shipping weight


1/2 lb [0.23 kg].


# **Options**


- 1015 Turn for inside operation is available alone (for use with 4026 cylinder pull on outside) or with a blank 1016 outside trim plate and binder posts (when cylinder is not required).
- · 4810 Box Strike with wood screws available separately.




# **Dimensions**








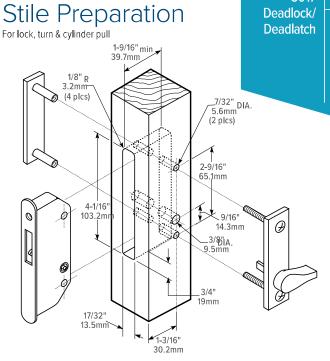

# Jamb Preparation

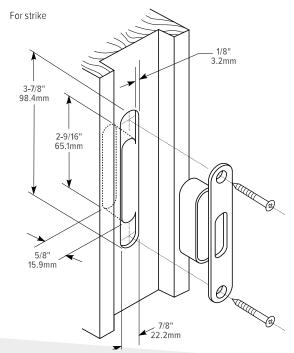

# How to Order & Related Products

5017 Deadlock/Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	LATCH CONFIGURATION	
5017	-00	
	00 Standard	
	02 Self Latching	

### **RELATED**

TRIM		CYLINDERS	ACCESSORIES	
	1004, 1015, 1016 Series Turn	4024, 4025, 4026 Cylinder Pulls	4810 Strike for wood installations	



# Deadlock





5500 Deadlock for sliding wood doors is a hardware set that includes the lockset, strike, and operators. The package features the 5017 Deadlock/Deadlatch with adjustable hookbolt and uses an over-sized thumbturn operator on the interior, coupled with an emergency override access location on the exterior escutcheon.

# **Function**

For wood framed sliding doors, the 5500 Deadlock features the 5017 Deadlock/Latch which provides the same 1000 lbs strength that the MS1847 Deadlock/Latch provides for metal stiles. The bolt throw is easily adjusted by means of a screw in the faceplate. Mounting is by through-bolts, which also secure the inside 1004 Turn Lever and outside 1016 Blank Plate escutcheon. The package incorporates the 1004 Turn Lever, an oversized thumbturn operator on the interior, coupled with the 1016 Blank plate escutcheon with an emergency override access location on the exterior.



45° rotation of 1004 Turn Lever projects or retracts bolt. Bolt is self-protecting: if door is shut while bolt is extended, it will retract, preventing damage or accidental lock-out.



# **Features**

# **Cylinder Backset**

1-3/16" [30.2 mm]; 1-1/4" [31.8 mm] including faceplate.

### Case

Measures 1/2" x 4" x 1-19/32" deep [12.7 mm x 101.6 mm x 40.5 mm deep]. Stainless steel.

### **Bolt**

Three-ply laminated stainless steel.

# **Door Thickness**

1" to 1-1/4" [25.4 mm to 31.8 mm] thick doors.

### **Faceplate**

Measures 5/8" x 4-1/2" [15.9 mm x 114.3 mm] with radiused ends. Stainless steel.

### Strike

4810 Box Strike for wood.

### **Operators**

**Inside:** 1004 Turn lever is zinc alloy with stainless steel escutcheon for interior activation of lock. Spindle is hardened steel, plated for corrosion resistance.


Outside: 1016 Blank plate escutcheon with emergency override access location on exterior of door.


# **Options**

· Available in choice of finish US26D (626) Satin chrome, or powder coat 119 Black to match 335 Black anodized.




# **Dimensions**











# Stile Preparation

For lock, turn & cylinder pull



# Jamb Preparation

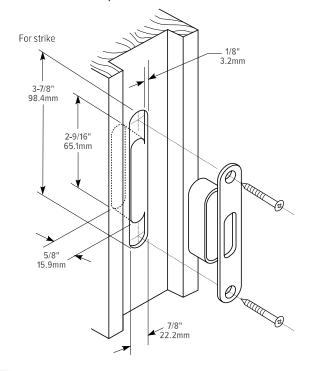

# How to Order

**5500 Deadlock:** Specify quantity and the following information. Order related products separately.

MODEL	DOOR THICKNESS	FINISH
5500	-20	-626
	20 1-1/4" thick	626 Satin Chrome
		119 To match 335 Black Anodized



# Options & Accessories

Adams Rite Deadlocks including the MS\* Maximum Security Deadlocks can be ordered with a variety of related products including strike plates, cylinder accessories and trim. Different deadlocks have different installation and cylinder requirements. Please refer to product pages for more information on all available deadlock types, functions, installation requirements and complete How-to-Order quides.

For more detailed information on any of the products listed below please refer to the corresponding section of this catalog.

# Accessories

# 4000 Series MS Deadlock Strikes

4000 surface mounted strike plate, 4001 strike plate with dust box, 4005 threshold strike, 4006 floor strike, 4505 armored strike, or 4003 ANSI strike add aesthetics and finish to strike cutouts in jambs.

### **4800 Series Strikes**

4801 for hollow metal, 4802 for wood, or MS4804 reinforcing strike, the 4800 Series Strikes boast vertical adjustment and include a shim system for horizontal positioning for nearly any sliding door using a mortised MS1847 Deadlock or latch.

### **Header Bolts**

4015 Threshold Bolt is a two-point lock that easily secures a single door entrance. Security for pairs of doors with single key turning is possible with the 4016 Header Bolt. The three-point lock easily secures the entire double door entrance when working in conjunction with an MS Deadlock. 4085 Header Bolt facilitate top-ofdoor third locking point for pairs of doors when working in conjunction with an MS pivoted bolt deadlock and 4015 Threshold Bolt in the active leaf.

# **Exit Indicator**

The 4089 Exit Indicator provides exit door notification for various Adams Rite deadlocks.

# Trim

### 1000 Series Turns

The 1000 Series Turns with or without escutcheon are designed to operate Adams Rite MS1847 Deadlocks and 5017 Wood Door Deadlock. These turns mount easily to door pull or other trim plate using push-nut mounting. The 1004 Turn has a longer, more ergonomically-friendly turn lever, the 1015 Turn is available for wood door applications with the 5017 Wood Door Deadlock.

# 3090 Keyless Entry

A battery-operated keyless entry control device, the eForce-150 3090 Keyless Entry provides access control for Adams Rite deadlocks, deadlatches, and exit devices for aluminum stile, steel, and wood door applications.

### 4550 Deadlock Lever

The 4550 MS Deadlock Lever easily unlocks an MS Deadlock with approximately 3 pounds of downward force. The spring-loaded lever relocks with an upward motion. Can be installed in place of existing key cylinder or cylinder type thumbturn on inside of door.

### **Deadlatch Paddles**

The 4590 and 4591 Deadlatch Paddles are an ergonomically-friendly alternative to a knob or lever handle. Operate the MS+1890 Deadlock/ Latch or 2190, 2290 Interconnected Deadbolt/Deadlatch with a simple push or pull.

# Cylinders

# **Cylinder Pulls**

The 4024, 4025, 4026 Cylinder Pulls are designed to operate Adams Rite MS1847 Deadlocks and 5017 Wood Door Deadlock.

# 4036 Mortise Cylinder

The 4036 Mortise Cylinder is a standard 1" long, 1-5/32" diameter cylinder that provides five-pin security with most Adams Rite locks or latches.


### 4066 Thumbturn

The 4066 Thumbturn interchanges with standard 1-5/32" diameter mortise cylinder and operates locks or latches without a key.


### MS4043 Cylinder Guard

The MS4043 Cylinder Guard is a hardenedsteel, free swiveling ring to protect cylinder from vandalism such as prying or twisting. Dimensions of MS cam to operate Adams Rite deadlocks, excluding 4070 Deadlock and 2331 Deadlock.


### **Dimensions of MS® Cam**



# Dimensions of cam to operate Adams Rite 2331 Deadlock



# Dimensions of cam to operate Adams Rite 4070 Deadlock





# Deadlatches















# DL100

# Wireless Deadlatch

The most advanced electrified deadlatch, with Aperio® wireless technology, for aluminum stile openings.

# **Function**

The DL100 Wireless Deadlatch seamlessly combines electrified locking hardware with access control system while working within standard aluminum stile entrance door preparations. Always operable from the inside via handle or paddle device. Entry via the integrated card reader or mortise cylinder. The standard fail secure DL100 Wireless Deadlatch with integrated locked state, latchbolt, and tamper monitoring is powered by 2 AA lithium batteries. Units are equipped with a quick connect



plug-in type connector. Interchangeable without stile modification for MS° Deadlocks or Adams Rite Deadlatches. 1-3/4" [44.5 mm] minimum door thickness required. Real time communication with DPS, tamper, REX and battery health monitoring and control with support for HID multiCLASS SE and NFC/BLE mobile access card technologies.

# Operation

Entry is achieved via key override, mobile or card credentials while free egress is achieved by operating the inside lever or paddle to release the spring-loaded latchbolt. Available in a fail-secure configuration only. Lock accepts any standard 1" mortise cylinder with MS\* cam, available separately.

# Certifications

- UL 294 Listed Indoor Rated
- UL 294 Salt Spray Test Compliant
- Tested to IP65 (Reader Only)
- FCC Part 15 & Industry Canada Compliant
- CE RED Radio Equipment Directive — 2014/53/EU

# **Features**

### All Models

- 2.4 GHz Aperio wireless technology
- Integrates with most existing access control systems and credentials
- Audit trail limited by access control system
- Battery operated; (2) AA Lithium

### **Deadlatch Features**

- · Non-handed
- Fail secure operation (standard)
- Integrated locked state, latchbolt, and tamper monitoring
- Universal compatibility with any existing MS® door prep
- Fully finished faceplate and strike plate

- Tamper resistant
- Low energy EcoLatch® motorized actuator technology

# Lock Backset

31/32" [24.6 mm], 1-1/8"[28.6 mm], and 1-1/2" [38.1 mm]

### Case

Steel with corrosion-resistant plating. Measures 15/16" x 5-13/16" x depth [23.8 mm x 147.6 mm x depth]. Depth varies by backset

### Latchbolt

Stainless steel. Measures 5/8" x 1" x 5/8"[15.9 mm x 25.4 mm x 15.9 mm] throw.

# **Auxiliary Bolt**

All metal. Deadlocks latchbolt to prevent "loiding" or case-knife entry.

# Cylinder

Standard 1" mortise cylinder accepted

### **Faceplate**

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm]. Both flat and radius faceplates are supplied. Flat faceplates can also be adjusted in the field for right or left beveled edge doors.



### Strike Plate

Pick from optional strikes: **4304 Surface mounted** strike for easy retrofits. **4901-01 Mortised-flush** when covering existing MS®deadlock preparation or for new applications. **4901-02 Mortised-radius** for pairs of doors and with extended lips of center-hung or thick door applications.

# **Deadlatch Reader Features**

- Supports HID multiCLASS SE® card technologies
- Supports NFC & BLE mobile access credentials
- Bi-color LED visual status indicators; Red/Amber or Green/Amber

# **Standard Package**

Individually boxed with strike plate, flat and radius faceplates, and mounting screws. Supplied with 4581 Universal Cam Plug to work with specified handles or paddle operators. Cylinder, paddle, handle available separately, (unless purchasing a Solution Set, see Options).

# **Options**

- Bundled with 4591 REX Paddle.
   See How to Order for ordering information.\*
  - \* Only available through ACP/Cl channel

27/64<u>"</u> 10.7mm

# Specifications

# **Wireless Access Control**

Minimal field configuration for quick, easy wireless deployments that eliminate the cost and inconvenience of hardwiring the door.

Fully-encrypted AES 128-bit wireless communication between the DL100 lock and Aperio® hub ensures data security.

The Aperio wireless hub connects to an access control system with typical access control cabling or via an ethernet connection.

# Compatible Aperio Hub Models

AH20, AH30, AH40



4591 Deadlatch Paddle

### **Electrical**

- (2) "AA" lithium batteries (included);
   Use of other types of batteries,
   such as alkaline, will significantly
   decrease battery life.
- · microUSB port for emergency power

### **Environmental**


- Operating Temperature (lock & reader): 14° to 140° F [-10° to 60° C]
- Operating Humidity (lock & reader): 0 to 93% relative humidity non-condensing
- · Tested to IP65 (Reader only)

# **Credential Support**

- High Frequency (13.56 MHz): HID iCLASS®, HID iCLASS SE® (SIO®-enabled), HID iCLASS® Seos®, HID MIFARE® SE, HID DESFire® EV1 SE, MIFARE CLASSIC, DESFire® EV1, DESFire® EV2 (legacy mode)
- Low Frequency (125 kHZ): HID Prox®, AWID, EM4102, IOProx
- Mobile Access Credentials: NFC, HID BLE
   Mobile Access, SEOS iOS Apple Wallet

NOTE: The DL100 is available as either a pre-paired reader and hub kit (no certification required) or as a field configurable component (requires Aperio\* Certified Integrator certification). Pre-paired kits support limited features, field configured devices are required in order to support all options. Visit IntelligentOpenings.com to learn more.


# **Dimensions**

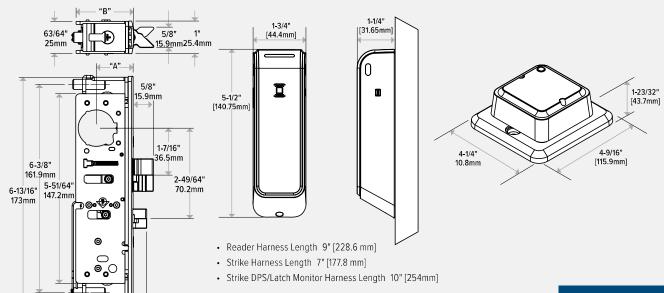


ARMORED FACEPLATE 1" X 6-7/8"
FLAT (INCLUDED) P/N 91-4300-01-XXX*
RADIUS (INCLUDED) P/N 91-4300-01-XXX*
RADIUS W/ WEATHERSTRIP P/N 91-4300-02-XXX*

\*Flat faceplate can be adjusted for right or left beveled edge doors. Radius weatherstrip is optional. 91-4300-01-XXX Faceplate kit includes both flat and radius faceplates.


BACKSET A	DIM. B
31/32"	1-19/32"
24.6mm	[40.5mm]
1-1/8"	1-49/64"
28.6mm	[44.8mm]
1-1/2"	2-9/64"
38.1mm	[54.4mm]



# Stile Preparation

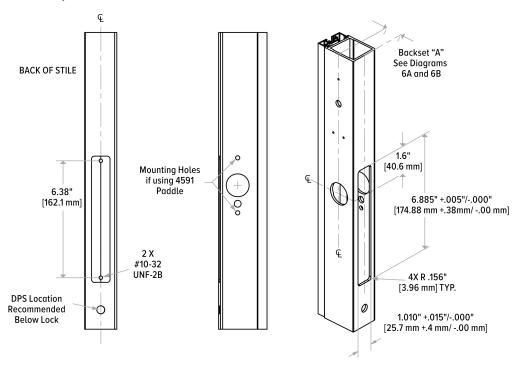


# ADA Cylinder Height

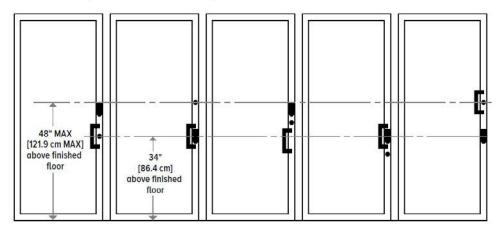



# Latch Paddle & Cylinder Installation

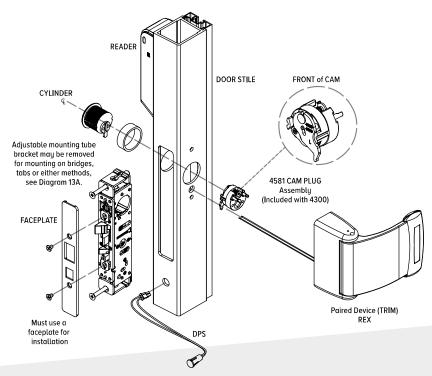

# How to Order & Related Products

DL100 Wireless Deadlatch: Specify quantity and the following information. Order related products separately.

SERIES	BACKSET	STRIKE	STRIKE SHAPE/ LIP LENGTH	OPT <b>I</b> ONS	CARD TECHNOLOGY	FINISH
DL100	-3	2	01	Н	-IPS	-628
Monitoring & DPS are Standard Features		1 Surface Mount	<b>01</b> Flat/ Standard Jamb	(* ****)	IPS HID iCLASS®, HID iCLASS SE® (SIO-enabled), HID iCLASS® Seos™, HID MIFARE® SE, HID DESFire® EV1 SE, MIFARE	313 Dark Bronze Anodized
		(4304)			Classic, MIFARE DESFire EV1, NFC-enabled Mobile Phones: HID Mobile Access (NFC), Seos Apple Wallet (NFC)	335 Black Anodized
			02 Radius Standard Stiles	AH30,	, , , , , , , , , , , , , , , , , , ,	628 Clear Anodized
		2 Mortised (4901) 17 Fi H	17 Flat/Center	or AH40 wireless hubs	IPEXXXXX <sup>†</sup> Same as IPS but with factory loaded HID Elite Credential	
			Z Mortiseu I/ Flat/Celitei		BIPSXXXXX*** † HID iCLASS, HID iCLASS SE (SIO-enabled), HID iCLASS Seos, HID MIFARE SE, HID DESFire EV1 SE, MIFARE Classic, MIFARE DESFire EV1, NFC & BLE-enabled Mobile Phones: HID Mobile Access (BLE and NFC), Seos Apple Wallet (NFC)	
				paired to work with AH20		
				BIPEXXXXX***† Same as BIPS but with factory	-	
				B (push right) * ^	loaded HID Elite Credential	
			C (pull left) * ^			
				D (pull right) * ^		

<sup>\*</sup> Only available through ACP/CI channel. ^ REX switch only available on PUSH configurations \*\* XXXXX is a unique or customer specific key that is only re-orderable for that specific company.

† HID Authorization form will need to be filled out and signed by the end user who has authority of the ELITE KEY.

TRIM	CYLINDERS	ACCESSORIES
4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles, 4600 Deadlatch Handles	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn, MS 4043 Cylinder guard	4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer, 4901, 4902 Deadlatch Strikes, DL100-DRK Door Repair/Retrofit Plate, APD10USB Aperio Radio Dongle*, ACC10 Credential Test Cards, HSA-HPK hard powered kit  * Only available through ACP/CI channel



MS® Prep

# Steel Hawk® 4300

# **Electrified Deadlatch**

The Steel Hawk® 4300 Electrified Deadlatch is a non-handed, narrow backset, electrified deadlatch designed for easy integration with access control systems.



The 4300 Electrified Deadlatch seamlessly combines electrified locking hardware with access control while working within standard narrow stile aluminum entrance door preparations. Always operable from the inside via handle or paddle device. Entry via keyed mortise cylinder or access control device such as keypad or card reader. Fail secure lock with optional form "C" latch status monitor. The standard fail secure 4300 Electrified Deadlatch operates on 12, 16, or 24 VDC power and is rated for continuous duty. Units are equipped with a quick connect plug-in type connector. Interchangeable without stile modification for

MS° Deadlocks or Adams Rite 4500 and 4900 Deadlatches. 1-3/4" [44.5 mm] minimum door thickness required.



Turn key, apply voltage, or operate handle or paddle to release the spring-loaded latchbolt. Electrically-rated for continuous duty for timed applications. Easily interfaces with other access control system elements. Available in fail secure configuration only. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS\* cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.

# Certifications

UL 294 Listed

# **Features**

### **Cylinder Backset**

31/32" [24.6 mm], 1-1/8" [28.6 mm], and 1-1/2" [38.1 mm].

### Case

Steel with corrosion-resistant plating. Measures 15/16" x 5-13/16" x depth [23.8 mm x 147.6 mm x depth]. Depth varies by backset (see table on back of page).

### Latchbolt

Stainless steel. Measures 5/8" x 1" x 5/8" [15.9 mm x 25.4 mm x 15.9 mm] throw.

# **Auxiliary Bolt**

All metal. Deadlocks latchbolt to prevent "loiding" or case-knife entry.

# **Faceplate**

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm]. Both flat and radius faceplates are supplied. Flat faceplates can also be adjusted in the field for right or left beveled edge doors.

# Strike

Pick from optional strikes. 4304 surface mounted strike for easy retrofits. Specify 4901-01 mortised-flush version when covering existing MS® deadlock preparation or for new applications. 4901-02 strike is available with radius profiles for pairs of doors and with extended lips of center-hung or thick door applications.

### **Standard Package**

Individually boxed with strike plate, flat and radius faceplates, and mounting screws. Supplied with 4581 Universal Cam Plug to work with specified handles or paddle operators. Cylinder, paddle, handle available separately.

### **Shipping Weight**

1-1/4 lbs [0.57 kg].

### **Product Note**

The 4600M with monitoring switch option cannot be used in conjunction with the 4300 Electrified Deadlatch.

# Electrical

# Voltage

Field-selectable to match power source of 12, 16, or 24 VDC.

# **Current Draw/Amps**

0.44A at 12VDC 0.458A at 16VDC\* 0.23A at 24VDC \*Required 16 VDC adapter (P/N VA 7400-16VDC)

# **Options**

- Backset, strike, and finish must be specified when ordering.
- Optional form "C" latch status monitoring available.


### RITE Pack®

Pairs the electrified deadlatch with multiple faceplates in a single package. Faceplates Included: 2 flat faceplates, 2 radius faceplates: one each of 628 Clear and one 313 Dark bronze anodized finish.




**US** adamsrite.com | 800.626.7590 | customerservice.adamsrite@assaabloy.com **Canada** assaabloydss.ca | 800.461.3007 | sales.dss.ca@assaabloy.com

P/N 91-4300-01-XXX<sup>3</sup>





27/64' 10.7mm



for mounting on bridges, tabs, or other methods

1-7/16" 2-49/64" 70.2mm





Adjustable Mounting Tube Bracket may be removed for mounting on bridges, tabs, or other methods.

4581 Cam Plug Assy.

Latch Paddle & Cylinder Installation

# How to Order

Steel Hawk® 4300 Electrified Deadlatch: Specify quantity and the following information. Order related products separately.

Strike

MODEL	BACKSET	MONITORING	STRIKE	STRIKE SHAPE/LIP LENGTH	FACEPLATE FINISH
4300	-3	М	-2	01	-628
	<b>2</b> 31/32"	<b>0</b> None	1 Surface Mount (4304)	01 Flat/Standard Jamb	313 Dark Bronze Anodized
	3 1-1/8"	M Monitored	2 Mortised (4901) 4-5/8"	02 Radius/Standard Stiles*	335 Black Anodized
	<b>4</b> 1-1/2"			17 Flat/Center Hung 4" Jamb*	628 Clear Anodized
				21 Flat/Center Hung 4-1/2" Jamb*	

<sup>\*</sup> See ACCESSORIES for available 4901 strike options.

4300 RITE Pack\*: Specify quantity and the following information. Order related products separately.

MODEL	BACKSET	MONITORING*	STRIKE	RITE PACK
4300	-3	0	-1	RP
	<b>2</b> 31/32"	<b>0</b> None (Standard)	1 Surface Mount (4304)	
	3 1-1/8"		2 Mortised (4901) 4-5/8"	

<sup>\*</sup> Monitoring not available with RITE Pack.

KELAILD I KODOCI	ELATED I RODOGTO when purchasing this product, please consider the following related products, available separately.					
TRIM	CYLINDERS	ACCESSORIES	POWER			
4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles,	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise	4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer, 4901, 4902 Deadlatch Strikes	4605 Transformer, 4603 Rectifier, and 4612 Power Transfer Device			
4600 Deadlatch Handles	Cylinder, 4066 Thumbturn MS 4043 Cylinder guard		- Adams			



# Standard Duty Deadlatch

4510 Standard Duty Deadlatches provide flexible traffic control during and after business hours.







# **Function**

The 4510 Series Standard Duty Deadlatch offers flexibility of traffic control during and after business hours. A reverse turn of the key while the bolt is held retracted retains the bolt to allow two-way traffic for healthcare, financial institutions, retail, and other applications that require free entrance at certain times and exit-only at other times. Interchangeable, without stile modification, with any MS1850S Deadlock of same backset and faceplate shape. They do not, however, provide the same maximum security level as the MS\*Deadlock.

# Operation

Turn key or operate handle or paddle to retract spring-loaded latchbolt. To hold bolt retracted, push it in and secure by reverse turn of key. Lock accepts any standard mortise cylinder with MS\* cam, available separately. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS\* cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



# **Features**

# **Cylinder Backset**


7/8" [22.2 mm], 31/32" [24.6 mm], 1-1/8" [28.6 mm] or 1-1/2" [38.1 mm].

### Case

Steel with corrosion-resistant plating. Measures 1" x 5-13/16" x depth [25.4 mm x 147.6 mm x depth]. Depth varies by backset (see table on back of page).

### **Bolt Holdback**

While bolt is held fully retracted, a reverse turn of the key retains the bolt, allowing the door to be free swinging.



### Latchbolt

All metal with hardened steel internal pins. Handing is reversible without special tools. Measures 1/2" x 1" x 1/2" [12.7 mm x 25.4 mm x 12.7 mm] throw.

### **Auxiliary Bolt**

All metal. Deadlocks latchbolt to prevent "loiding" or case-knife entry.

# Faceplate

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm].

# Strike

Standard strike furnished is 4902-01 for flat jamb where door closes flush or nearly flush. Available separately: radius strike for opposite stile in paired doors; longer strike (4901) to cover slot strike of MS lock; long lip strikes for center hung doors.

### Standard Package

Individually boxed with strike and mounting screws. Cylinder, paddle, handle available separately.

### **Shipping Weight**

1-1/4 lbs [.57 kg]. Also available in a 25-unit pack for volume customers. Please contact factory for more information.


# **Options**


- Backset, faceplate shape, strike, handing, and finish must be specified when ordering.
- Available without faceplate or strike plate, select 4513.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.




# Stile Preparation

Identical to MS1850S Series (Also see prep for 4590 Paddle)





Latch Paddle & Cylinder Installation



BACKSET	"A"	ARMORED FACEPLATE 1" X 6-7/8"
7/8" 22.2mm	1-33/64" 38.5mm	1 X 0-7/8
31/32" 24.6mm	1-19/32" 40.5mm	FLAT 4510
1-1/8" 28.6mm	1-49/64" 44.8mm	RADIUS 4511
1-1/2" 38.1mm	2-9/64" 54.4mm	RADIUS W/WEATHERSTRIP 4511W
		LH BEVEL 4512-X5
		RH BEVEL 4512-x6

# How to Order & Related Products

4510 Standard Duty Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	HANDING	STRIKE SIZE	STRIKE SHAPE/LIP LENGTH	FACEPLATE FINISH
451	1	-3	6	-2	01	-628
	0 Flat	<b>1</b> 7/8"	<b>5</b> LH or RHR	1 Mortised (4901) 4-5/8"	01 Flat/Standard Jamb	313 Dark Bronze Anodized
	1 Radius	<b>2</b> 31/32"	6 RH or LHR	2 Mortised (4902) 2-5/8"	02 Radius/Standard Stiles	335 Black Anodized
	1W Radius w/ Weatherstrip	3 1-1/8"			17 Flat/Center Hung 4" Jamb	628 Clear Anodized
	2 Bevel	<b>4</b> 1-1/2"			21 Flat/Center Hung 4-1/2" Jamb	
	3 Without faceplate, without strike plate					

ELECTRIC STRIKES	TRIM	CYLINDERS	ACCESSORIES
7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes	3090-150, 4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles, 4600 Deadlatch Handle	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn MS4043 Cylinder guard	4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer, 4901, 4902 Deadlatch Strikes







# 4530

# Standard Duty Deadlatch

4530 Standard Duty Deadlatches provide flexible traffic control during and after business hours. Designed to retrofit into the prep of older MS1850 Deadlocks and discontinued 4250 Deadlatches.

# **Function**

The 4530 Standard Duty Deadlatch offers flexibility of traffic control during and after business hours. A reverse turn of the key while the bolt is held retracted retains the bolt to allow two-way traffic for healthcare, financial institutions, retail, and other applications that require free entrance at certain times and exit-only at other times. 4530 Deadlatches are designed to fit without alteration, the stile cutout for older MS1850 Series Deadlocks and discontinued 4250 Deadlatches of same backset.



# Operation

Turn key or operate handle to retract spring-loaded Latchbolt. To hold bolt retracted, push it in and secure by reverse turn of key. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS\* cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.

# **Features**

### **Cylinder Backset**

7/8" [22.2 mm], 31/32" [24.6 mm], or 1-1/8" [28.6 mm] only.

### Case

Steel with corrosion-resistant plating. Measures 1" x 5-13/16" x depth [25.4 mm x 147.6 mm x depth]. Depth varies by backset (see table on back of page).

# **Bolt Holdback**

While bolt is held fully retracted, a reverse turn of the key retains the bolt, allowing the door to be free swinging.

# Latchbolt

All metal with hardened steel internal pins. Handing is reversible without special tools. Measures 1/2" x 1" x 1/2" [12.7 mm x 25.4 mm x 12.7 mm] throw.

### **Auxiliary Bolt**

All metal. Deadlocks latchbolt to prevent "loiding" or case-knife entry.

### **Faceplate**

Measures 1-1/4" x 7-13/32" [31.8 mm x 188.1 mm].

### Strike

Standard strike furnished is 4901-01 for flat jamb.

# Standard Package

Individually boxed with strike plate and mounting screws. Cylinder, paddle, handle available separately.

### **Shipping Weight**


1-1/4 lbs [0.57 kg]

# **Options**

- Backset, faceplate shape, strike, handing, and finish must be specified when ordering.
- Available without faceplate or strike plate, select 4533.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.





All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.

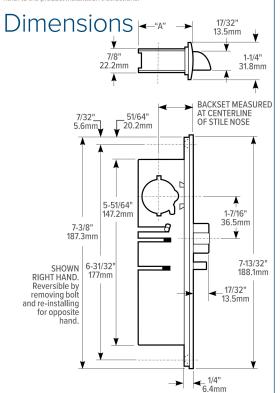


# Stile & Jamb Preparation

To replace old MS1850 lock or 4250 latch of same backset: **No Preparation Required** 








BACKSET	"A"
7/8"	1-33/64"
22.2mm	38.5mm
31/32"	1-19/32"
24.6mm	40.5mm
1-1/8"	1-49/64"
28.6mm	44.8mm

Latch Paddle & Cylinder Installation



# How to Order & Related Products

CYLINDER &

4530 Standard Duty Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	HANDING	STRIKE SIZE	STRIKE SHAPE/ LIP LENGTH	FACEPLATE FINISH
453	1	- 3	6	- 1	O1	- 628
	<b>0</b> Flat	<b>1</b> 7/8"	5 LH or RHR	1 Mortised (4901) 4-5/8"	01 Flat/Standard Jamb	313 Dark Bronze Anodized
	1 Radius	<b>2</b> 31/32"	6 RH or LHR	2 Mortised (4902) 2-5/8"	02 Radius/Standard Stiles	335 Black Anodized
	2 Bevel	<b>3</b> 1-1/8"			17 Flat/Center Hung 4" Jamb	628 Clear Anodized
	3 Without faceplate, without strike plate				21 Flat/Center Hung 4-1/2" Jamb	

ELECTRIC STRIKES	TRIM	CYLINDERS	ACCESSORIES
7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes	3090-150, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles, 4600 Deadlatch Handle	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn MS4043 Cylinder guard	4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer, 4901, 4902 Deadlatch Strikes







# Two-Point Deadlatch with Paddle

The 4781 Two-Point Deadlatch latches to header and threshold allowing both door leaves to remain active. It is designed for paired out-swinging narrow stile doors, but is also suitable for single doors.

# **Function**

Designed for paired out-swinging narrow stile doors, but also suitable for single doors. Instead of operating a conventional horizontal-throw latchbolt, the 4781 Two-Point Deadlatch latches to header and threshold. This allows both door leaves to be "active". There is no need to pin one door with flush bolts or other devices. The paddle is a modified version of the 4591 Deadlatch Paddle and the concealed vertical rod mechanism is the same as used in Adams Rite's 8600 Series Exit Devices. Note however, that the 4781 Two-Point Deadlatch is not intended to substitute for an exit device, which must have a door-spanning bar.

# Operation

Inside: Push paddle to unblock top bolt and withdraw bottom bolt. Continuing to push will open the door in a very natural, ergonomically-friendly motion. Paddle stroke is approximately 1-1/2" [38.1 mm] at extreme end. Rod adjustment allows paddle (centerline) to be mounted at any height from 30 to 44 inches above the finished floor.

Outside: If key entry operation is required, any standard mortise cylinder with MS° cam can be installed through an 8650 Cylinder Escutcheon. 3080 Entry Trim compatible with Adams Rite exit devices can be specified in the version used for CVR devices.



# **Features**

# **Paddle Dogging**

Turning hex screw in paddle escutcheon holds paddle down, leaving door free-swinging.

### **Strike**

A flanged post installed on the header has generous location adjustment to allow for door misalignment, sag, bumpers, etc. Designed to prevent forced entry by bowing the door.

### **Threshold Bolt**

Stainless hexagonal steel bolt requires only a 1/2" [12.7 mm] diameter hole in threshold for a strike.

### **Top Bolt**

Similar to door latches on some automobiles and aircraft, the

U-shaped bolt wraps around the strike post to deadlock position, which also deadlocks the bottom bolt through a gear train at the center of the rod assembly.

# **Door Size**

Standard unit will fit doors up to 66" [1676.4 mm] above the paddle height. 110" [2794 mm] door if paddle is at max 44" [1117.6 mm] height.

# Standard Package

Individually boxed with mounting screws and installation instructions.

# **Shipping weight**

3 lbs [1.36 kg].


# **Options**


- Can be exit only or allow key access from outside with use of 8650 Cylinder Escutcheon. 3080 Entry Trim can also be specified in the version used for CVR devices.
- · For taller doors, order 8655 Tall Door Kit, which allows up to 97" above paddle.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized, US26D (626) Satin chrome.



DEADLATCHES

# **Dimensions**

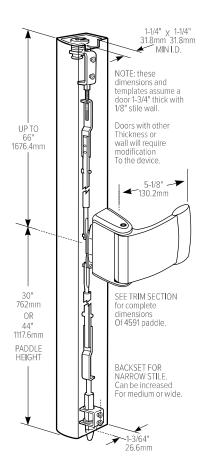

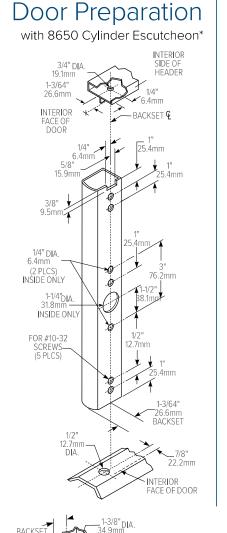

(OUTSIDE ONLY)

Ç OF PADDLE 1-5/8"


1-5/8" 1-5/8" 41.3mm € OF CYLINDER


3/8" DIA.

IMPORTANT

(2 PLCS) DRILL BEFORE 1-3/8" DIA. HOLE

# Installation

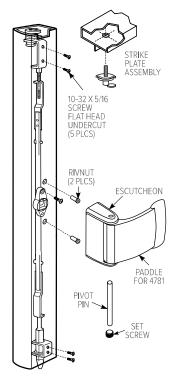



\*OTHER CYLINDER ESCUTCHEONS for use with 17mm profile cylinders (in 44 or 55mm thick doors only) are also available and require different door prep than shown

# How to Order & Related Products

4781 Two-Point Deadlatch with Paddle: Specify quantity and the following information. Order related products separately.

MODEL	ROD TYPE	OPERATION	PADDLE FINISH
4781	Т	- 021	- 628
	T Top Rod Only	<b>021</b> Push to Left	313 Dark Bronze Anodized
	Standard Rod	<b>041</b> Push to Right	<b>335</b> Black Anodized
			628 Clear Anodized
			US26D Satin Chrome

TRIM	CYLINDERS	ACCESSORIES
3080 Series Entry Trim	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder MS4043 Cylinder guard	8650 Cylinder Escutcheon, 8655 Tall Door Kit









# 4900

# Heavy Duty Deadlatch

4900 Heavy Duty Deadlatch provides flexible traffic control and easy installation.

# **Function**

Flexibility of traffic control and easy installation is offered by 4900 Series Heavy Duty Deadlatches. A key-controlled bolt hold-back feature allows for two-way traffic for applications which require free entrance at certain times and exit-only at other times. This allows a "locked" entrance to be used as an exit by visitors already in the building. 1-3/4" [44.5 mm] minimum door thickness required. Interchangeable, without stile modification, with any MS1850S deadbolt of same backset and faceplate shape. Also retrofits to existing 4510 and discontinued 4700 Deadlatch preparations.

# Operation

Turn key or operate handle or paddle to retract spring-loaded latchbolt. To hold bolt retracted, push it in and secure by reverse turn of key. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS\* cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



# **Features**

### **Cylinder Backset**

31/32" [24.6 mm], 1-1/8" [28.6 mm], or 1-1/2" 38.1 mm].

### Case

Steel with corrosion-resistant plating. Measures 7/8" x 5-13/16" x depth [22.2 mm x 147.6 mm x depth]. Depth varies by backset (see table on back of page). Screw-fastened tube spacer brackets allow for cleaner removal when tab mounting.

### **Bolt Holdback**

While bolt is held fully retracted, a reverse turn of the key retains the bolt, allowing the door to be free swinging.

### Latchbolt

Solid brass. Handing is easily reversible without special tools. Measures 5/8" x 1" x 5/8" [15.9 mm x 25.4 mm x 15.9 mm] throw.

### **Auxiliary Linchpin**

Stainless steel. Deadlocks latch bolt to prevent "loiding" or case-knife entry.

### **Faceplate**

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm]. Both flat and radius faceplates are supplied. Flat faceplates can also be adjusted in the field for right or left beveled edge doors.

# Strike

Standard strike furnished is 4902 for flat jamb where door closes flush or nearly flush. Specify 4901 for retrofit installations. Also available: radius strike for opposite stile in paired doors and long lip strikes for center-hung doors.

### Standard Package

Individually boxed with strike plate, flat and radius faceplates, and mounting screws. Cylinder, paddle, handle available separately.

# **Shipping Weight**


1-1/4 lbs [0.57 kg].


# **Options**

- Backset, faceplate shape, strike, handing, and finish must be specified when ordering. See 4920AN Heavy Duty Deadlatch (ANSI Size) for wood and hollow metal door applications.
- Available without faceplate or strike plate, select 4913.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.












Flat faceplate can be adjusted for right or left beveled edge doors.


# Stile Preparation

Identical to MS1850A or MS1850S Series (See also prep for 4591 paddle).

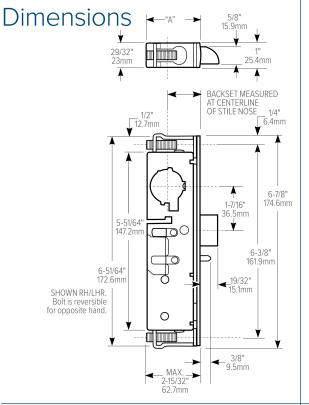


All measurements are approximate and are provided for informational purposes only.

Refer to the product Installation Instructions



# Latch Paddle & Cylinder Installation



# How to Order & Related Products

4900 Heavy Duty Deadlatch: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	HANDING	STRIKE SIZE	STRIKE SHAPE/LIP LENGTH	FACEPLATE FINISH
49	00	- 3	5	- 2	01	- 628
	00 Standard	<b>2</b> 31/32"	5 LH or RHR	1 Mortised (4901) 4-5/8"	01 Flat/Standard Jamb	313 Dark Bronze Anodized
	11W Radius with Weatherstrip	<b>3</b> 1-1/8"	6 RH or LHR	2 Mortised (4902) 2-5/8"	02 Radius/Standard Stile	335 Black Anodized
	13 Without faceplate,	<b>4</b> 1-1/2"			17 Flat/Center Hung 4" Jamb	628 Clear Anodized
	without strike plate				21 Flat/Center Hung 4-1/2" Jamb	

	, ,	1 /1	3 1
ELECTRIC STRIKES	TRIM	CYLINDERS	ACCESSORIES
7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes	3080, 3080E Series Entry Trim, 3090-150, 4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles, 4600 Deadlatch Handle	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn 4043 Cylinder guard	4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer, 4901, 4902 Deadlatch Strikes



# 4920AN

# Heavy Duty Deadlatch (ANSI Size)

4920AN Heavy Duty Deadlatch provides flexible traffic control and easy installation for wood or hollow metal doors.







# **Function**

Flexibility of traffic control and installation is offered by 4920AN Heavy Duty Deadlatches. A key-controlled bolt hold-back feature allows for two-way traffic for applications which require free entrance at certain times and exit-only at other times. This allows a "locked" entrance to be used as an exit by visitors already in the building. 1-3/4" [44.5 mm] minimum door thickness required. Interchangeable, without stile modification, with any MS1850SN Deadlock of same backset and faceplate shape. Replaces 4520 and discontinued 4720 ANSI Deadlatches. For hollow metal or wood doors prepared for hardware according to the specifications of the American National Standards Institute (ANSI).



Turn key or operate handle or paddle to retract spring-loaded latchbolt. To hold bolt retracted, push it in and secure by reverse turn of key. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS\* cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



# **Features**

# **Cylinder Backset**

1-1/2" [38.1 mm] or 2-3/4"[69.9 mm] only.

### Case


Steel with corrosion-resistant plating. Measures 7/8"  $\times$  5-13/16"  $\times$  depth [22.2 mm  $\times$  147.6 mm  $\times$  depth]. Depth varies by backset (see table on back of page).

### **Bolt Holdback**

While bolt is held fully retracted, a reverse turn of the key retains the bolt, allowing the door to be free swinging.

# Latchbolt

Solid brass. Handing is easily reversible without special tools. Measures 5/8" x 1" x 5/8" [15.9 mm x 25.4 mm x 15.9 mm] throw.



# **Auxiliary Linchpin**

Stainless steel. Deadlocks Latchbolt to prevent "loiding" or case-knife entry.

### **Faceplate**

Measures 1-1/4" x 8" [31.8 mm x 203.2 mm] armored flat faceplate can also be adjusted in the field for right or left beveled edge doors.

### **Strike**

4506-02 Strike furnished to ANSI preparation specifications for flat jamb. Stainless steel, US32D Satin finish (630). Available without strike (-000).

### Standard Package

Individually boxed with strike plate, faceplate, and mounting screws. Cylinder, paddle, handle available separately.

# **Shipping Weight**


1-1/4 lbs [0.57 kg].

# **Options**

- Backset, faceplate shape, strike, handing, and finish must be specified when ordering. See 4900 Heavy Duty Deadlatch for aluminum stile door applications.
- Available without faceplate and strike, select 4923AN.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.









Flat faceplate can be adjusted for right or left beveled edge doors.

FLAT 24-0138-01-XXX

BACKSET	"A"
1-1/2"	2-9/64"
38.1mm	54.4mm
2-3/4"	3-25/64"
69.9mm	86.1mm

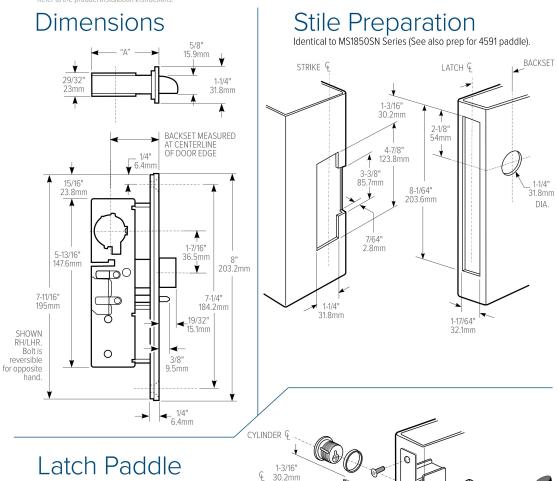

& Cylinder Installation



# How to Order & Related Products

4920AN Heavy Duty Deadlatch (ANSI Size) Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE	BACKSET	HANDING	STRIKE	FACEPLATE FINISH
492	OAN	4	6	- 602	- 313
	OAN Flat	<b>4</b> 1-1/2"	5 LH or RHR	000 Less Strike	313 Dark Bronze Anodized
	3AN Without faceplate,	<b>5</b> 2-3/4"	6 RH or LHR	<b>602</b> 4506 Strike	335 Black Anodized
	without strike plate				628 Clear Anodized

	' '		<u> </u>
ELECTRIC STRIKES	TRIM	CYLINDERS	ACCESSORIES
7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes	3080, 3080E Series Entry Trim, 3090-150, 4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles, 4600 Deadlatch Handle	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn 4043 Cylinder guard	4506-02 Deadlatch Strikes



# Options & Accessories

Adams Rite Deadlatches can be ordered with a variety of related products including strike plates, cylinder accessories, electric strikes and trim. Different deadlatches have different installation and cylinder requirements. Please refer to product pages for more information on all available deadlatch types, functions, installation requirements and complete How-to-Order guides. For more detailed information on any of the products listed below please refer to the corresponding section of this catalog.

# **Accessories**

### 4901, 4902 Deadlatch Strikes

4901, 4902 Deadlatch Strikes add aesthetics and finish to strike cutouts in jambs. These strikes offer a choice of mounting methods: a backup mounting plate included with the 4901 and 4902 allows installation flush in a hollow section jamb. 4506-02 ANSI strike available for wood or steel jambs. See images on next page.

# Cylinders

# 4036 Mortise Cylinder

The 4036 Mortise Cylinder is a standard 1" long, 1-5/32" diameter cylinder that provides five-pin security with most Adams Rite locks or latches.

### 4066 Thumbturn

The 4066 Thumbturn interchanges with standard 1-5/32" diameter mortise cylinder and operates locks or latches without a key.

# MS 4043 Cylinder Guard

The MS4043 Cylinder Guard is a hardenedsteel, free-swiveling ring to protect cylinder from vandalism such as prying or twisting.

# **Electric Strikes**

# 7100, 7400 Series Electric Strikes

The 7100 Series Electric Strikes and Ultraline 7400 Series Electric Strikes are designed for use with Adams Rite deadlatches or cylindrical locksets with a variety of latchbolt projections. An assortment of faceplate dimensions is available for use in hollow metal, wood or aluminum applications.

# Power

### 4603 Rectifier

Converts low voltage AC current to DC of same voltage. Installs in low voltage line between transformer and strike. Full wave bridge type. Rated 2 Amps. (200 PIV).

### 4605 Transformer

Converts 120 VAC to 12 VAC/24VAC. Rated 40 Volt-amp output assures plenty of power for strike release.

### 4606 Transformer

Converts 120 VAC current to 24 VAC. Plugs into standard wall outlet.

### 29-0218 Piezo Horn

Provides for audible indication of when a DC strike is energized. Operates with 12 VDC, 16 VDC, or 24 VDC strikes.

### **4612 Power Transfer Device**

The 4612 Power Transfer Device channels electrical wiring from the door frame into the door itself. This powers electric strikes, locks, exit bars, and more on door hung with butt-type hinges.

# Trim

# 3080 Series Entry Trim

The 3080 Series Entry Trim provides outside activation for doors with any type of Adams Rite deadlatch or exit device. The locked handle is protected from vandalism and forced entry with a breakaway clutching mechanism.

# 3090 Keyless Entry

A battery-operated keyless entry control device, the eForce-150 3090 Keyless Entry provides access control for Adams Rite deadlocks, deadlatches, and exit devices for aluminum stile, steel, and wood door applications.

### **Deadlatch Handles**

The 4560 and 4565 Deadlatch Handles and 4568 and 4569 Euro Deadlatch Handles easily unlock the 4300, 4500 and 4900 Series Deadlatches. These handles fit solidly into the cylinder hole of the latch.

### **Deadlatch Paddles**

The 4590, 4591 Deadlatch Paddle is an ergonomically-friendly alternative to a knob or lever handle. Operate the 4300, 4500 and 4900 Series Deadlatches with a simple push or pull.


# 4600 Heavy Duty Deadlatch Handle


The 4600 Heavy Duty Designer Deadlatch Handles are designed with a patented adjustable drive mechanism to operate the 4300, 4500, and 4900 Series Deadlatches.




# Deadlatch Strikes


# 4901, 4902

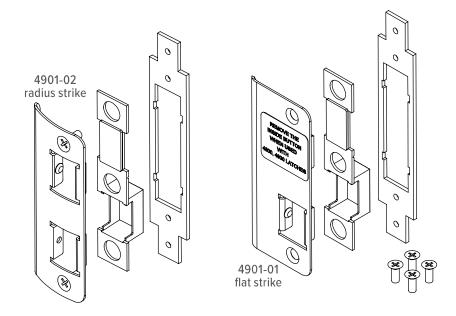







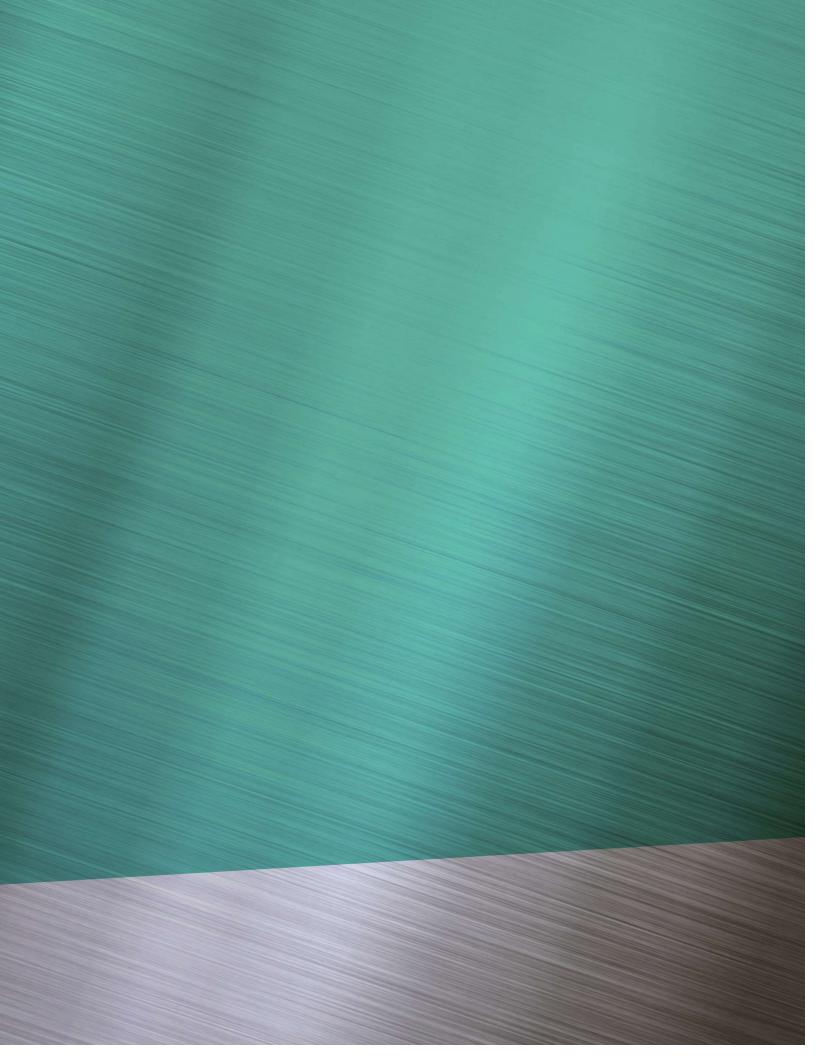

# Plushlocks









# 1870 Series Cylinder-Operated Flushbolt

Designed for greater key control, the 1870 Cylinder-Operated Flushbolt prevents accidental locking of the inactive leaf of narrow stile aluminum paired doors. May be installed to lock at threshold or at header.

# **Function**

Designed for use instead of conventional flip-lever operated flushbolts, 1870 Cylinder-Operated Flushbolts give building management key control of the inactive leaf of paired narrow stile aluminum doors. Prevents casual locking of the inactive leaf by unauthorized persons. Uses same basic over-center action mechanism as MS\* pivoted bolt deadlocks. Recommended for installation at both top and bottom of inactive door with MS1850S MS Deadlock in active door for greatest security. May be installed to lock at threshold or at header.

# Operation

360° turn of key throws or retracts the hex-section bolt. Key can be removed only when bolt is in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder, or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



# **Features**

# **Cylinder Backset**

31/32" [24.6 mm] or 1-1/8" [28.6 mm] only.

# **Cylinder Height**

Standard length (cylinder center to retracted bolt tip) is 12" [304.8 mm] with  $\pm$  1-1/4" [31.8 mm] adjustment. Please contact factory for other lengths available by special order.

### Case

Steel with corrosion-resistant plating. Measures 1" x 6" x depth [25.4 mm x 152.4 mm x depth]. Depth varies by backset (see table on back of page).

# Bolt

Stainless steel. Hexagonal 3/8" [9.5 mm] flat to flat, with 11/16" [17.5 mm] throw.

### Strike

1/2" [12.7 mm] diameter hole in metal threshold or header is suitable. For wood thresholds, 4005 Strike is available separately.

# **Faceplate**

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm]. Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.

### Standard Package

Flushlock mechanism boxed with actuator arm attached, rod/bolt assembly unattached. Stainless steel bolt guide, mounting screws, and installation instructions included. Cylinder available separately.


# **Shipping Weight**

1-1/4 lbs [.57 kg].





# Stile Preparation


For installation locking threshold. Invert for header locking.

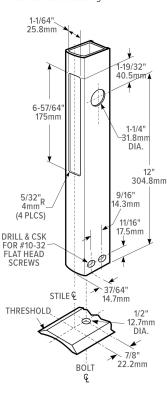

# Lock & Cylinder Installation

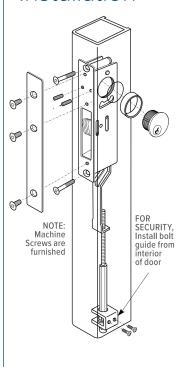





BACKSET	"A"
31/32"	1-5/8"
24.6mm	41.3mm
1-1/8"	1-25/32"
28.6mm	45.2mm

# How to Order & Related Products

1870 Cylinder-Operated Flushbolt Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE SHAPE	BACKSET	HANDING	FINISH
1870	0	- 2	0	- 628
	0 Flat	<b>2</b> 31/32"	1 Non-Handed*	313 Dark Bronze Anodized
	1 Radius	<b>3</b> 1-1/8"	5 LH or RHR	335 Black Anodized
	1W Radius with weatherstrip		6 RH or LHR	628 Clear Anodized
	2 Bevel			

<sup>\*</sup>Any flat or radius faceplate.

11/16" 17.5mm

THROW

CYLINDERS	ACCESSORIES	SPECIAL ORDER OPTIONS
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn MS4043 Cylinder guard	4005 strike for wood threshold 4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer	Other cylinder height / length available by special order. Please contact factory.







# 1870HM

# Cylinder-Operated Flushbolt

Designed for greater key control, the 1870HM Cylinder-Operated Flushbolt prevents accidental locking of the inactive leaf of paired hollow metal doors. May be installed to lock at threshold or at header.

# **Function**

Designed for use instead of conventional flip-lever operated flushbolts, 1870HM Cylinder-Operated Flushbolts give building management key control of the inactive leaf of paired hollow metal doors. Prevents casual locking of the inactive leaf by unauthorized persons. Uses same basic over-center action mechanism as MS® pivoted bolt deadlocks. Recommended for installation at both top and bottom of inactive door with MS1850SN MS Deadlock in active door for greatest security. May be installed to lock at threshold or at header.

# Operation

360° turn of key throws or retracts the hex-section bolt. Key can be removed only when bolt is in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder, or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



# **Features**

### **Cylinder Backset**

1-1/4" [31.8 mm] only.

### **Cylinder Height**

Standard length (cylinder center to door end) is 13-1/2" [342.9 mm]. Please contact factory for other lengths available by special order.

Steel with corrosion-resistant plating. Measures 7/8" x 6" x 1-21/32" [22.2 mm x 152.4 mm x 42.1 mm].

### **Bolt**

Stainless steel. Hexagonal 3/8" [9.5 mm] flat to flat, with 11/16" [17.5 mm] throw.

### **Strike**

2-1/4" x 15/16" [57.2 mm x 23.8 mm] strike is supplied.

## **Faceplate**

Measures 1" x 8" [25.4 mm x 203.2 Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.


# Standard Package

Flushlock mechanism boxed with actuator arm attached, rod/bolt assembly unattached. Stainless steel bolt guide, mounting screws, and installation instructions included. Cylinder available separately.

# **Shipping Weight**

1-1/4 lbs [.57 kg].



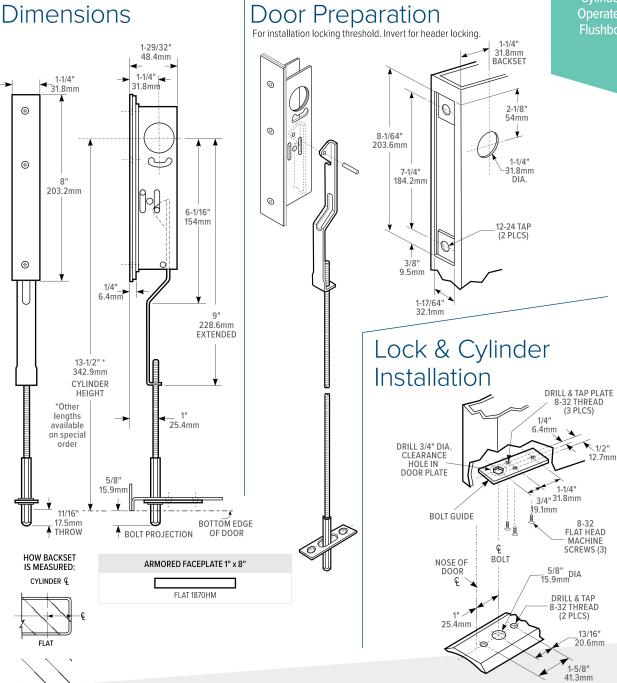

# How to Order & Related Products

1870HM Cylinder-Operated Flushbolt: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE SHAPE	FINISH	
187	ОНМ	- 628	
	OHM Flat	313 Dark Bronze Anodized	
		335 Black Anodized	
		628 Clear Anodized	

	1 3 1 /1	3
CYLINDERS	ACCESSORIES	SPECIAL ORDER OPTIONS
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn MS4043 Xylinder Guard	4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer	Other cylinder height / length available by special order. Please contact factory.



# Cylinder-Flushbolt





# Cylinder-Operated Flushbolt

Designed for greater key control, the 1877 Cylinder-Operated Flushbolt prevents accidental locking of the inactive leaf of paired wood doors. May be installed to lock at threshold or at header.

# **Function**

Designed for use instead of conventional flip-lever operated flushbolts, 1877 Cylinder-Operated Flushbolts give building management key control of the inactive leaf of paired wood doors. Prevents casual locking of the inactive leaf by unauthorized persons. Uses same basic over-center action mechanism as MS® pivoted bolt deadlocks. Recommended for installation at both top and bottom of inactive door with MS1837 MS Two-Point Deadlock in active door for greatest security. May be installed to lock at threshold or at header.

# Operation

360° turn of key throws or retracts the hex-section bolt. Key can be removed only when bolt is in a positively locked or unlocked position. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS° cam such as the 4036 Mortise Cylinder, or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



# **Features**

## **Cylinder Backset**

1-1/4" [31.8 mm] only.

### **Cylinder Height**

Standard length (cylinder center to door end) is 13-1/2" [342.9 mm]. Please contact factory for other lengths available by special order.

# Case

Steel with corrosion-resistant plating. Measures 1" x 6" x 1-29/32' [25.4 mm x 152.4 mm x 48.4 mm].

Stainless steel. Hexagonal 3/8" [9.5 mm] flat to flat, with 11/16" [17.5 mm] throw.

# **Strike**

2-1/4" x 15/16" [57.2 mm x 23.8 mm] strike is supplied.

### **Armored Faceplate**

Measures 1-1/4" x 15-5/8" [31.8 mm x 396.9 mm]. Available in choice of 313 Dark bronze anodized, 628 Clear anodized, US3 (605) Bright brass, US26D (626) Satin chrome.

### Standard Package

Flushlock mechanism boxed with actuator arm attached, rod/bolt assembly unattached. Stainless steel bolt guide, mounting screws, and installation instructions included. Cylinder available separately.

# **Shipping Weight**

2 lbs [0.91 kg]



### **Dimensions**

### 1-1/4" 31.8mm FACEPLATE 1-29/3<u>2"</u> 48.4mm 1-1/4" 31.8mm BACKSET 1/4"\_→ 6.4mm 25.4mm LOCK MTG **④** $\frac{1}{2}$ **③** 15-5/8" 396.9mm 13-1/2" 342.9mm STANDARD CYLINDER HEIGHT **BOLT GUIDE**

5/8'

BOLT

**PROJECTION** 

**BOLT GUIDE** 


3/4"

19.1mm

15 9mm

### Installation

For installation locking threshold. Invert for header locking.

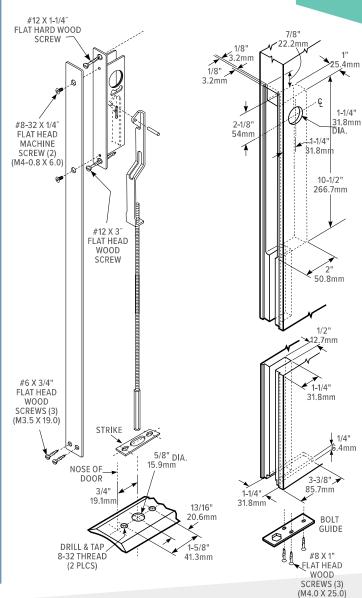

### How to Order & Related Products

\_\_3-1/4"\_\_ 82.6mm

BOTTOM EDGE

OF DOOR

25.4mm

**1877 Cylinder-Operated Flushbolt:** Specify quantity and the following information. Order related products separately.

MODEL	FINISH
1877	- 628
	313 Dark Bronze Anodized
	605 Bright Brass
	626 Satin Chrome
	628 Clear Anodized

CYLINDERS	SPECIAL ORDER OPTIONS
Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumbturn	Other cylinder height / length available by special order. Please contact factory.







# MS1880 Two-Point Flushbolt

MS1880 Two-Point Flushbolts offer greater convenience than flip-lever flushbolts. With one operation, they provide security and reduce human error.

### **Function**

Used instead of flip-lever flushbolts in the inactive leaf of paired doors, the MS1880 Two-Point Flushbolts offer greater convenience: one operation instead of two. They also promote security by removing an element of human error. A positive blocking device makes it impossible to turn the key in the active door unless the inactive leaf has first been secured. The MS1880 must be installed in conjunction with a pivoted bolt MS\* deadlock. Cannot be unlocked when pivoted bolt is in locked position. Not to be used as a standalone locking mechanism.

### Operation

Turn knob or lever 180° clockwise to throw hardened steel bolts into header and threshold and clear strike opening so pivoted MS° bolt can enter from active door. Counterclockwise turn retracts vertical bolts and blocks entry of pivoted bolt. Operates in conjunction with any MS° pivoting deadlock.



### **Features**

### **Header | Threshold Bolt**

Hexagonal 3/8" [9.5 mm] flat to flat. Stainless steel. Guides furnished. Bolt throw is 23/32" [18.3 mm]. Strike required in metal headers and thresholds is 1/2" [12.7 mm] diameter hole. For wood installation, two 4005 Strikes are required, available separately.

### Interlock

All steel mechanism includes device to prevent entry of pivoted bolt until vertical bolts are locked and conversely, to prevent unlocking of vertical bolts when pivoted bolt is locked.

### Turn Lever | Indicator

MS1880 has an hourglass-shaped turn for firmer finger grip. Red background indicator has aluminum letters reading "LOCKED" when secure. No message shown when unlocked.

**MS1881** has a teardrop-shaped turn with red letters on clear decal indicating unlock direction only.

### **Turn Height**

Matches cylinder height of MS® lock in active door.

### Standard Package

Individually boxed with bolt quides and screws.


### Shipping weight

2 lbs [.91 kg].

### **Options**

- For wood header or threshold, 4005 Strike available separately.
- For doors over 84" [2,133.6 mm] up to 120" [3,048 mm].
- Tall Door Kit TDK-1880 available separately.
- Available in choice of powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, and US26D (682) Satin chrome.



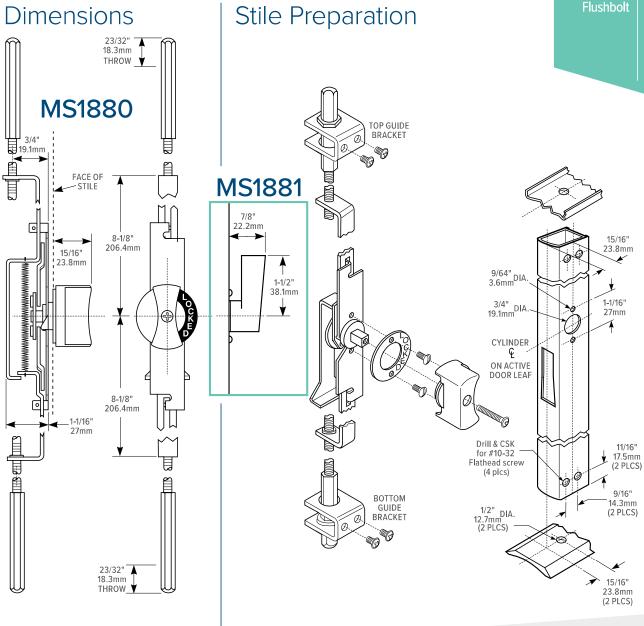

### How to Order & Related Products

MS1880 Two-Point Flushbolts Specify quantity and the following information. Order related products separately.

MODEL	TURN SHAPE	CYLINDER HEIGHT*	FINISH
MS188	0	- 01	- 628
	0 Hourglass	<b>1</b> 31" to 35"	119 Black
	1 Teardrop	2 35-1/16" to 39"	121 Dark Bronze
		<b>3</b> 39-1/16" to 43"	<b>682</b> Satin Chrome
		<b>4</b> 43-1/16" to 47"	
		<b>5</b> 47-1/16" to 51"	

<sup>\*</sup> Distance from floor to cylinder centerline.

DEADLOCKS	ACCESSORIES
1850S-020, MS1850S, MS1850S-050, MS1950, MS1950-050 Series Deadlocks	TDK-1880 Tall Door Kit, 4005 Wood Strikes



# Aluminium



# MS2180

### Auto-Release Two-Point Flushbolt

The MS2180 Auto-Release Two-Point Flushbolts work in conjunction with any MS® pivoting deadlock to provide maximum security for paired narrow stile aluminum doors.

### **Function**

Used instead of flip-lever flushbolts in the inactive leaf of paired doors. One turn pins the inactive leaf in position. The pivoting MS\* deadlock in the active leaf secures the entire opening. The action of securing the MS\* deadlock trips an internal mechanism in the MS2180 so that when the MS\* deadlock is retracted, the entire opening releases with only one operation. This auto-release two-point flushbolt must be installed with a pivoted bolt MS\* deadlock. **Not to be used as a standalone locking mechanism.** 

### Operation

Turn knob or lever 120° counterclockwise to throw stainless steel bolts into header and threshold and clear strike opening so pivoted MS° bolt can enter from active door. Clockwise turn retracts vertical bolts and blocks entry of pivoted bolt. Operates in conjunction with any MS° pivoting deadlock.

### **Features**

### **Header | Threshold Bolt**

Hexagonal 3/8" [9.5 mm] flat to flat. Stainless steel. Guides furnished. Bolt throw is 23/32" [18.3 mm]. Strike required in metal headers and thresholds is 1/2" [12.7 mm] diameter hole. For wood installation, two 4005 Strikes are required, available separately.

### **Smart Lock**

Mechanism includes device to prevent entry of pivoted bolt until vertical bolts are locked and conversely, to prevent unlocking of vertical bolts when pivoted bolt is locked.

### Monitoring

Monitoring Kit available as add-on switch kit that signals when the top and bottom bolts are fully projected and the MS® deadlock is in the extended and locked position. More than an easily defeated door position switch, the MK-2180 Monitoring Kit

uses a form "C" switch to provide a tamper-proof indication of the door position and locked condition.

### Turn Lever | Indicator

MS2180 has an hourglassshaped turn for a firm finger grip. Red lettered indicator shows "LOCKED" when secure.

**MS2181** has a teardrop-shaped turn with red letters on clear decal indicating unlock direction only.

MS2182 is a limited-access flush turn to comply with IBC requirements for "no doorknob" actuation. MS2182 is supplied with an activation tool. Red lettered indicator shows "LOCKED" when secure.

### **Turn Height**

Matches cylinder height of MS® deadlock in active door, adjustable from 34" [863.6 mm] to 48" [1,219.2 mm].

### **Standard Package**

Individually boxed with bolt guides and screws.


### **Shipping weight**


2 lbs [.91 kg].

### **Options**

- For wood header or threshold, 4005 Strike available separately.
- Available in choice of powder coat 119 Black to match 335 Black anodized, 121 Dark bronze to match 313 Dark bronze anodized, and 130 Clear to match 628 Clear anodized.



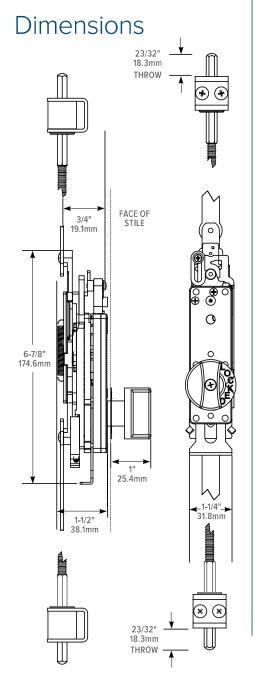

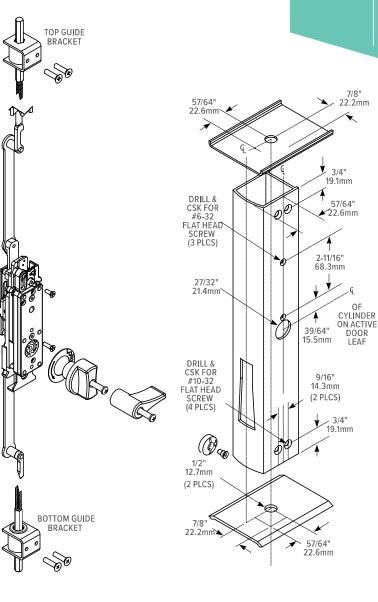

Stile Preparation

### How to Order & Related Products

MS2180 Auto-Release Two-Point Flushbolt Specify quantity and the following information. Order related products separately.

MODEL	TURN SHAPE	DOOR HEIGHT (FROM FLOOR TO TOP OF DOOR)	FINISH TO MATCH*
MS218	О	- 07	- 130
	0 Hourglass	<b>07</b> Up to 7' Door	119 Black Anodized
	1 Teardrop	08 Up to 8' Door	121 Dark Bronze Anodized
	2 Flush Operator	09 Up to 9' Door	130 Clear Anodized
		<b>10</b> Up to 10' Door	000 Electroless Nickel

<sup>\*</sup> MS2182 only available in Electroless Nickel finish (-000)









# 4189, 419C

### Flush Locksets

### (Including Deadlock)

The 4189, 4190 Flush Locksets for sliding doors combine the time-tested and field-proven Adams Rite MS1847 Deadlock with a slide button.

### **Function**

Projecting only 1/10" [2.5 mm] from the door stile on either side, the all-metal 4189, 4190 Flush Locksets allow doors to slide freely past other sliding units or stationary panels. There are no projecting handles to prevent doors from being stacked in a wall pocket. Not recommended for wood doors.

### Operation

Locksets operated from inside by a simple up or down movement of a slide button, set flush in the deeply recessed finger pull. The lock mechanism (latching action unavailable) is the time-tested and field-proven Adams Rite MS1847 Deadlock and features the adjustable, self-protecting bolt.

- · 4189 without cylinder
- 4190 has a flush mounted cylinder outside
- 4195 matching 'dummy set' is also available



### **Features**

### **Backset**

Variable, minimum 5/8" [15.9 mm], maximum 1-9/32" [32.5 mm] from face of lock to escutcheon and cylinder centerline.

### Stile Depth

Minimum clear depth: Backset plus 9/16" [14.3 mm].

### **Escutcheons**

Zinc alloy, satin silver epoxy.

### **Anti Lift Lock Mechanism**

Basic MS1848-09 (radius ends) or MS1848-10 (square ends) is supplied. Stainless steel bolt is selfprotecting, adjustable for reach.

### Operation

**Inside:** Vertical slide button projects or retracts deadlock bolt.

Outside: 4190 features a key in, five-pin cylinder with Schlage "C" keyway that projects or retracts bolt.

### Standard Package

4190, with cylinder, and 4189, without cylinder, are each complete packages. Shipped individually boxed with mounting screws. 4190 includes two keys. Standard 4190 units are keyed different (KD). Contact factory for special keying.

### **Shipping Weight**


1-1/4 lbs [0.57 kg].


### **Options**

- · Specify 4190 if outside key-cylinder operation required; 4189 if not. Dummy set 4195 also available.
- · Lock face is available as -09 for radius-ended lock face or -10 for square-ended lock face.
- 4413 Interior Pull available separately.




### **Dimensions**

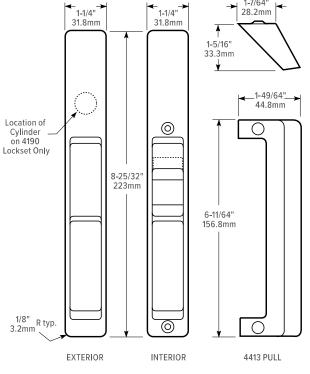



### Stile Preparation

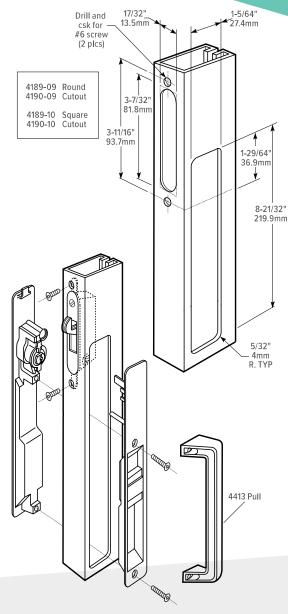

### How to Order & Related Products

4189, 4190, 4195 Flush Locksets: Specify quantity and the following information. Order related products separately.

MODEL	LOCKSET EXTERIOR	LOCK FACE	STILE THICKNESS	FINISH	KEYING OPTIONS	PACKAGING
41	90	- 09	- 01	- 130	- 01	- IB
	89 Without Cylinder 00 Without Lock		<b>01</b> 1" to 1-3/8"	130 To match Clear Anodized 628	00 Without Cylinder	IB Individually Boxed
	90 With Cylinder 09 Radius		<b>02</b> 1-7/16" to 1-5/8"	<b>121</b> To match Dark Bronze Anodized 313	01 Keyed Different	
	95 Dummy 09S Radius Stainless Steel		<b>03</b> 1-11/16" to 2"	119 To match Black Anodized 335	<b>02</b> Keyed Alike in Pairs	
	10 Square					
		10S Square Stainless Steel				

ACCESSORIES	SPECIAL ORDER OPTIONS
4413 Interior Pull	Keyed alike 50 are available by special order in quantity of 50 locksets only. Please contact factory for ordering information.







# 4430, 4431 Flush Locksets

# (Including Deadlock)

The 4430, 4431 Flush Locksets for sliding doors combine the time-tested and field-proven Adams Rite MS1847 Deadlock with a slide button.

### **Function**

Similar in function and nearly identical in size to the all-metal 4189, 4190 Flush Locksets, these economical units feature escutcheons molded of sturdy ABS resin. The black satin finish of the 4430, 4431 Flush Locksets lends elegance to aluminum doors. Not recommended for wood doors.

### Operation

Locksets operated from inside by a simple up or down movement of a slide button, set flush in the deeply recessed finger pull. The lock mechanism (latching action unavailable) is the time-tested and field-proven Adams Rite MS1847 Deadlock and features the adjustable, self-protecting bolt.

- 4430 without cylinder
- 4431 has a flush mounted cylinder outside
- 4432 matching 'dummy set' is also available.



### **Features**

### **Backset**

Variable, minimum 5/8" [15.9 mm], maximum 1-9/32" [32.5 mm] from face of lock to escutcheon and cylinder centerline.

### Stile Depth

Minimum clear depth: Backset plus 9/16" [14.3 mm].

### **Escutcheons**

Molded ABS resin plastic. Black Satin finish. Deeply recessed finger pull on both sides. Fits same cutout as metal 4189, 4190 Flush Locksets.

### **Anti Lift Lock Mechanism**

Basic MS1848-09 (radius ends) or MS1848-10 (square ends) is supplied. Stainless steel bolt is selfprotecting, adjustable for reach.

### Operation

**Inside:** Vertical slide button projects or retracts deadlock bolt.

Outside: 4431 features a key in, five-pin cylinder with Schlage "C" keyway, projects or retracts bolt. Other cylinder makes not available.

### Standard Package

4431, with cylinder, and 4430, without cylinder, are each complete packages. Shipped individually boxed with mounting screws. 4431 includes two keys. Standard 4431 units are keyed different (KD). Contact factory for special keying.

### **Shipping Weight**


1-1/4 lbs [.57 kg].

### **Options**


- Specify 4431 if outside key-cylinder operation required; 4430 if not. Dummy set 4432 also available.
- Lock face is available as -09 for radius-ended lock face or -10 for square-ended lock face.
- 4413 Interior Pull available separately.



### **Dimensions**

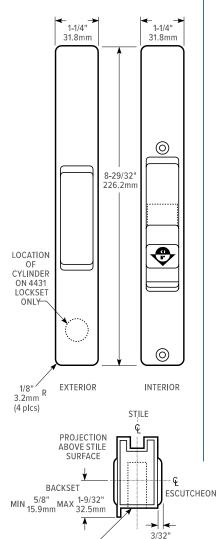

### Stile Preparation

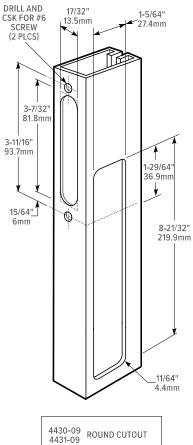


4430-10

4431-10

**SQUARE CUTOUT** 

### Installation

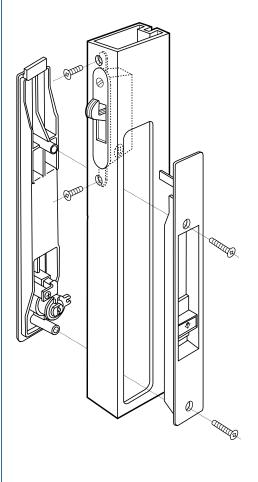

### How to Order & Related Products

**ESCUTCHEONS** 

4430, 4431 Flush Locksets: Specify quantity and the following information. Order related products separately.

MODEL	LOCKSET EXTERIOR	LOCK FACE	STILE THICKNESS	KEYING OPTIONS	PACKAGING
44	31	- 09	-05	-01	-IB
	30 Without Cylinder	00 Without Lock	<b>00</b> 1" to 1-5/16"	00 Without Cylinder	IB Individually Boxed
	31 With Cylinder	09 Radius 09S Radius Stainless Steel	<b>05</b> 1-3/8" to 1-5/8"	01 Keyed Different	<b>10PK</b> 10 Pack
	32 Dummy	10 Square 10S Square Stainless Steel	<b>08</b> 1-3/4" to 2"		

RELATED PRODUCTS When purchasing this product, please consider the following related products, available separately:

ACCESSORIES

4453 Interior Pull

4453-02-335

LOCK FACE



# Options & Accessories

Adams Rite Flushlocks can be ordered with a variety of related products including strike plates, trim and cylinder accessories and compatible products such as Adams Rite deadlocks. Please see product pages for more information on all available flushlock types, functions, installation requirements and complete How-to-Order guides. For more detailed information on any of the products listed below please refer to the corresponding section of this catalog.

### Accessories

### 4000 Series MS Deadlock Strikes

4000 surface mounted strike plate, 4001 strike plate with dust box, 4005 threshold strike, 4006 floor strike, or 4505 armored strike add aesthetics and finish to strike cutouts in jambs.

### Deadlocks

MS1880, MS1881 Two-Point Flushbolts and MS2180 Auto-Release Two-Point Flushbolt **MUST** be installed in conjunction with a pivoted bolt MS deadlock. See DEADLOCKS section of this catalog for information on all available types and functions including complete How-to-Order guides for Adams Rite Deadlocks including the MS® Maximum Security Deadlocks.

### Cylinders

### 4036 Mortise Cylinder

The 4036 Mortise Cylinder is a standard 1" long, 1-5/32" diameter cylinder that provides five-pin security with most Adams Rite locks or latches.

### 4066 Thumbturn

The 4066 Thumbturn interchanges with standard 1-5/32" diameter mortise cylinder and operates locks or latches without a key.


### MS 4043 Cylinder Guard

The MS4043 Cylinder Guard is a hardenedsteel, free-swiveling ring to protect cylinder from vandalism such as prying or twisting.



# Exit Devices



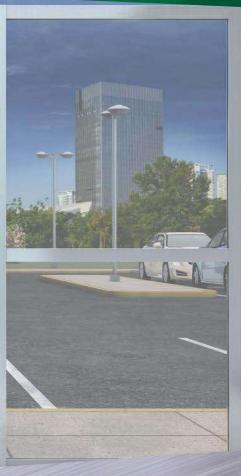











3100 Only



# Series Fire-Rated Surface Vertical Rod Exit Device Series Life-Safety Surface Vertical Rod Exit Device

The 3100 Series Fire-Rated Surface Vertical Rod Exit Device is designed for hollow metal and wood applications that require a fire-rated exit device with surface vertical rods for two-point locking. The 8100 Series Surface Vertical Rod Exit Device is designed for hollow metal and wood applications that require a life-safety exit device with surface vertical rods for two-point locking.

Designed for use in applications with single doors or pairs of doors.

MODEL	TYPE	RATING	DOOR CONSTRUCTION	MAX SIZE SINGLE DOORS	MAX SIZE PAIR & DOUBLE EGRESS	
3100	SVR	3 hr	Hollow Metal Door	4'-0" x 10'-0"	8'-0" x 10'-0"	
3100	SVR	90 min	Wood Door	4'-0" x 10'-0"	8'-0" x 9'-0"	
3100T	SVR-TRO	3 hr	Hollow Metal Door	4'-0" x 8'-0"	8'-0" x 10'-0"	
3100W	SVR-TRO	1-1/2 hr	Wood Door	4'-0" x 8'-0"	8'-0" x 8'-0"	
<b>3100W</b> SVR-TRO 20 min		Wood Door	4'-0" x 9'-0"	8'-0" x 9'-0" (std. pairs)		

### Certifications

UL 305 Panic Hardware

UL10C fire rated, up to 3 hours for non-wood door applications

CAN/ULC S104 fire door conformant NFPA 252 fire door conformant ANSI/BHMA A156.3, Grade 1

### **Features**

### **Materials**

Push bar made of extruded aluminum, available in a variety of finishes.

### Handing

Device is non-handed.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762 mm], 36" [914.4 mm], 42" [1066.8 mm], and 48" [1219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Bar Height**

Standard model adjusts from 30" [762 mm] to 44" [1117.6 mm].

### **Door Height**

Standard configuration suitable for doors up to 8' [2.44 m] door, with bar height at 40" [1016 mm] – 44" [1117.6 mm]. For doors up to 10' [3.05 m] use 3055 Tall Door Kit available separately.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard, up to 2-1/4" [57.2 mm].

### Stile Width

Minimum 3-3/4". Door construction may require additional stile width to meet fire ratings and provide adequate strength.

### **Projection**

2-15/16" [74.6 mm] when fully projected, 1-15/16" [49.2 mm] when dogged.

### Dogging

Standard dogging with hex key or with cylinder not available on fire-rated exit devices. Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.



### Cylinders

Select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### **Cylinder x Fixed Pull Functions**

For entry trim function 03 (Night latch - key releases latch) select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Bolts and Strikes**

The patented top latching mechanism utilizes a rotating top bolt which latches around the header strike, interlocking the door to the frame. Adjustable steel rods protected in contoured covers. The hexagonal, hardened steel bottom bolt is shielded in a cast housing for strength and stability. For wood frames, an additional plate is supplied for securing the header strike.

### Standard Package Individually boxed.

Shipping Weight 12 lbs [5.44 kg]


### Series 8100 **Series**

### **Options**

- · Available in top rod only version, less bottom rod. Specify by adding "T" after exit device model number.
- · Electrification Options Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps

For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions

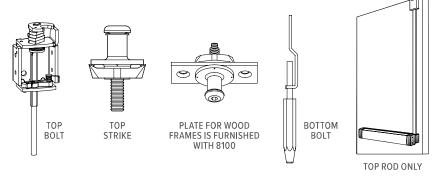

### How to Order & Related Products

8100, 3100 Surface Vertical Rod Exit Device: Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR F <b>I</b> N <b>I</b> SH	ROD TYPE	DEVICE OPTIONS	MONITORING OPTION	DOOR OPENING WIDTH On pair of doors, specify HALF of the total exit opening		US FINISH	END CAPS OPTION FOR US FINISH
81	00	_	MLR	M2	-30			
31 Fire Rated	<b>00</b> US Finish	T Top Rod only	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps
81 Life- Safety	11 Clear Anodized 628	W Top Rod only – Wood doors	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	<b>US4</b> Satin Brass	
	22 Dark Bronze Anodized 313	<ul> <li>Standard rods</li> </ul>	C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor	AXXB Alarmed Exit Device where XX is door opening width		US32 Bright Stainless	
	33 Black Anodized 335		A Alarm				US32D Satin Stainless	
	333		(Blank) No Option				Stainiess	

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option.

TRIM	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150, 3001 Fixed Pull (for hollow metal or wood)	Operable by either 4036 Mortise Cylinder or 8736 Rim Cylinder depending upon the ANSI/BHMA functions of the exit device	26-0584 Sex Bolt Kit (two required per device) Tall Door Kit available separately: 8055 for 8100 or 3055 for 3100 REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE and PS-LR models) , 4612 Power Transfer Device , 4605 Transformer, 4603 Rectifier



### Narrow Stile Surface Vertical Rod Exit Device







The 8200 Series Narrow Stile Surface Vertical Rod Exit Device is designed for narrow stile aluminum applications that require a life-safety exit device with surface vertical rods for two-point locking. Designed for use in applications with single doors or pairs of doors

### Certifications

UL 305 Panic hardware ANSI/BHMA A156.3, Grade 1



### **Features**

### Materials

Push bar made of extruded aluminum, available in a variety of finishes.

### Handing

Device is non-handed.

### Push bar Length

Standard sizes: dimensioned for 30" [762 mm], 36" [914.4 mm], 42" [1066.8 mm], and 48" [1219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Bar Height**

Standard model adjusts from 30" [762 mm] to 44" [1117.6 mm].

### **Fasteners**

Standard machine screws.

### **Projection**

2-15/16" [74.6 mm] when fully projected, 1-15/16" [49.2 mm] when dogged.

### **Door Height**

Standard configuration suitable for doors up to 8' [2.44 m] door, with bar height at 40" [1016 mm] – 44" [1117.6 mm]. For doors up to 10' [3.05 m] use 8055 Tall Door Kit available separately.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard, up to 2-1/4" [57.2 mm].

### Stile Width

Minimum 2" stile. Fits narrow, medium, and wide stile aluminum doors.

### Dogging

Standard dogging with hex key or optional cylinder dogging.
Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### Cylinders

Select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### Cylinder x Fixed Pull Functions

For entry trim function 03 (Night latch - key releases latch) select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.



### **Bolts and Strikes**

The patented top latching mechanism utilizes a rotating top bolt which latches around the header strike, interlocking the door to the frame. Adjustable steel rods protected in contoured covers. The hexagonal, hardened steel bottom bolt is shielded in a cast housing for strength and stability. Supplied with standard header strike.

### **Standard Package**

Individually boxed.

### **Shipping Weight**

12 lbs [5.44 kg]

### **Options**


 Available in top rod only version, less bottom rod. Specify by adding "T" after exit device model number.

### • Electrification Options

Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps

For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.



### How to Order & Related Products

8200 Narrow Stile Surface Vertical Rod Exit Device: Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR FINISH	ROD TYPE	DEVICE OPTIONS	MONITORING OPTION	DOOR OPENING WIDTH On pair of doors, specify HALF of the total exit opening		US FINISH	END CAPS OPTION FOR US FINISH
82	00	_	MLR	M2	-36			
82 Life-Safety	00 US Finish	T Top Rod only	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps
	11 Clear Anodized 628	<ul> <li>Standard rod</li> </ul>	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass	
	22 Dark Bronze Anodized 313		C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor	AXXB Alarmed Exit Device where XX is door opening width		US32 Bright Stainless	
	33 Black Anodized 335		A Alarm				US32D Satin Stainless	
			(Blank) No Option				3300	

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option.

TR <b>I</b> M	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150	Operable by either 4036 Mortise Cylinder or 8736 Rim Cylinder depending upon the ANSI/BHMA functions of the exit device	8055 Tall Door Kit REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE and PS-LR models) , 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier



# (UL)









3300 Only



### 3300 Series Fire-Rated Mortise Exit Device Series Life-Safety Mortise Exit Device

### The 3300 Series Fire-Rated Mortise Exit

**Device** is designed for hollow metal and wood applications that require a fire-rated exit device with mortise locking solution. **The 8300 Series Mortise Exit Device** is designed for hollow metal and wood applications that require a life-safety exit device with mortise locking solution.

Designed for use in applications with single doors or pairs of doors.



MODEL	TYPE	RATING	DOOR CONSTRUCTION	MAX SIZE SINGLE DOORS	MAX SIZE PAIR & DOUBLE EGRESS
3300	(SPM) Single Point Mortise	3 hr	Hollow Metal Door	4'-0" x 10'-0"	8'-0" x 10'-0" *(active leaf)

<sup>\*</sup>May be used with 3100 or 3600 Series with an open back strike.

### Certifications

UL 305 Panic Hardware

**3300 Only:** UL10C fire-rated, up to 3 hours

CAN/ULC S104 fire door conformant NFPA 252 fire door conformant

ANSI/BHMA A156.3, Grade 1

### **Features**

### **Materials**

Push bar made of extruded aluminum, clad or anodized in a variety of finishes.

### Handing

Specify handing and bevel if applicable.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Backset**

2-3/4" [69.9 mm] only

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard. Can be modified for thicker doors.

### Stile Width

Minimum 5" [127.0 mm]. Door construction may require additional stile width to meet fire ratings and provide adequate strength.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### **Dogging**

Standard dogging with hex key or with cylinder not available on fire-rated exit devices. Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### **Fasteners**

Standard self-tapping screws and machine screws. Optional Sex Bolt Kits 26-0584 (two required per device) available separately.



3300 Series & 8300 Series

Accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Cylinder x Fixed Pull Functions**

For function 03 (Night latch – key releases latch) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Bolts and Strikes**

Mortise deadlatch with bolt measuring 5/8" x 1" x 5/8" [15.9 mm x 25.4 mm x 15.9 mm] throw. Solid brass bolt.

A variety of strikes are available for different applications:

 Standard strike of stainless steel included, Open Back Strike 4009-01 available separately.


### **Options**


### • Electrification Options

Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps

For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.





### How to Order & Related Products

8300, 3300 Surface Vertical Rod Exit Device Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE FINISH	FACE SHAPE	DEVICE OPTIONS	MONITORING OPTION	DOOR HANDING	PUSH BAR FINISH	DOOR OPEN On pair of doors of the total ex	, specify HALF	US FINISH	END CAPS OPTION FOR US FINISH
83	3	0	MLR	М	-7	3	A36	6B		
33 Fire Rated	<b>0</b> US Finish	<b>0</b> Flat	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>7</b> RHR	<b>0</b> US Finish	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps
83 Life- Safety	1 Clear Anodized 628		MLR Motorized Latch Retraction	M2 Dual Switch	8 LHR	1 Clear Anodized 628	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass	
	2 Dark Bronze Anodized 313		C Cylinder Dogging (non-fire rated	(Blank) No Monitor		2 Dark Bronze Anodized 313	AXXB Alarmed E where XX is door		US32 Bright Stainless	
	3 Black Anodized 335		devices ONLY)  A Alarm			3 Black Anodized 335			US32D Satin Stainless	
			- No Option						Stamilioso	

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option.

ELECTRIC STRIKE	TRIM	CYLINDER	ACCESSORIES	POWER
7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes	3080, 3080E Series Entry Trim, 3090-150, 3001 Fixed Pull (for hollow metal or wood)	Operable by 4036 Mortise Cylinder depending upon the ANSI/BHMA functions of the exit device	26-0584 Sex Bolt Kit (two required per device) Thick Door Kits, 8360-XX Extended Lip Strike, 4009- 01 Open Back Strike, 4506-02 Deadlatch Strike REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE and PS-LR models) , 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier



### Life-Safety Narrow Stile Mortise Exit Device









The 8400 Series Narrow Stile Mortise Exit Device is designed for narrow stile aluminum applications that require a life-safety exit device with mortise locking solution.

Designed for use in single door applications.

### Certifications

UL 305 Panic Hardware ANSI/BHMA A156.3, Grade 1



### **Features**

### **Materials**

Push bar made of extruded aluminum, clad or anodized in a variety of finishes.

### Handing

Specify handing and bevel if applicable.

### **Push bar Length**

Standard sizes dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Backset**

31/32" [24.6 mm], 1-1/8" [28.6 mm], or 1-1/2" [38.1 mm]. Fits standard cutout used for the Adams Rite 4900 Heavy Duty Deadlatch on narrow stile aluminum doors.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard. Device can be modified for thicker doors using Thick Door Kit available separately, or for thermal doors using Thermal Door Kit available separately.

### Stile Width

Minimum 2" [50.8 mm] stile. Fits narrow, medium, and wide stile aluminum doors.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### **Dogging**

Standard dogging with hex key or optional cylinder dogging.
Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### **Fasteners**

Standard machine screws.

### Cylinders

Accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### Cylinder x Fixed Pull Functions

For function 03 (Night latch - key releases latch) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Function 03 is not applicable to 8475 Mortise Mid-Panel Exit Device.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.



### **Bolts and Strikes**

Mortise deadlatch with bolt measuring 5/8" x 1" x 5/8" [15.9 mm x 25.4 mm x 15.9 mm] throw. Solid brass bolt.

A variety of strikes are available for different applications:

 Standard strike of stainless steel included, Extended Lip Strike 8460 available separately, Long Face Strike 8455-01 available separately.

### **Standard Package**

Individually boxed.

### **Shipping Weight**

11 lbs [4.99 kg]


### **Options**

### • Electrification Options

 Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps

For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.

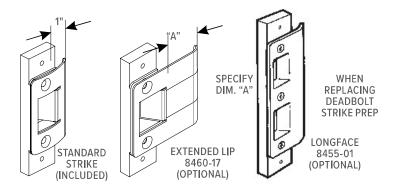

### How to Order & Related Products

8400 Narrow Stile Mortise Exit Device Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE FINISH	FACE SHAPE	DEVICE OPTIONS	MONITORING OPTION	BACKSET	DOOR HANDING	PUSH BAR FINISH	DOOR OPENING WIDTH On pair of doors, specify HALF of the total exit opening		US FINISH	END CAPS OPTION FOR US FINISH
84	1	4	MLR	M2	-4	7	1	42			
84 Life- Safety	<b>0</b> US Finish	<b>0</b> Flat, bevel, radius	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>2</b> 31/32"	7 RHR	<b>0</b> US Finish	<b>30</b> 30 inches	<b>42</b> 42 inches	<b>US3</b> Bright Brass	MEC Matching End Caps
	1 Clear Anodized 628	4 Radius w/ Weatherstrip*	MLR Motorized Latch Retraction	M2 Dual Switch	3 1-1/8"	8 LHR	1 Clear Anodized 628	<b>36</b> 36 inches	<b>48</b> 48 inches	<b>US4</b> Satin Brass	
	2 Dark Bronze Anodized 313		C Cylinder Dogging (non-fire rated	(Blank) No Monitor	<b>4</b> 1-1/2"		2 Dark Bronze Anodized 313	AXXB Alarme Device where a door opening v	XX is	US32 Bright Stainless	
	3 Black Anodized 335		devices ONLY)  A Alarm				3 Black Anodized 335			US32D Satin Stainless	
			- Without Options								

<sup>\*</sup> Radius with weatherstrip faceplate is not available in US finishes.

ELECTRIC STR <b>I</b> KE	TRIM	CYLINDER	ACCESSORIES	POWER
7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes	3080, 3080E Series Entry Trim, 3090-150	Operable by either 4036 Mortise Cylinder depending upon the ANSI/BHMA functions of the exit device	Thick or Cladded Door Kits, 8360-17 Extended Lip Strike, 8455-01 Longface, 8460-XX Long Lip Strike, 4901, 4902 Deadlatch Strike REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE and PS-LR models) , 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier













3600 Only



# Series Fire-Rated Concealed Vertical Rod Exit Device Series Life-Safety Concealed Vertical Rod Exit Device

The 3600 Series Fire-Rated Concealed Vertical Rod Exit Device is designed for hollow metal applications that require a fire-rated exit device with concealed vertical rods for two-point locking.

The 8500 Series Concealed Vertical Rod Exit **Device** is designed for hollow metal applications that require a life-safety exit device with concealed vertical rods for two-point locking.

Designed for use in applications with single doors or pairs of doors.

MODEL	TYPE	RATING	DOOR CONSTRUCTION	MAX SIZE SINGLE DOORS	MAX SIZE PAIR & DOUBLE EGRESS
3600	CVR	3 hr	Hollow Metal Door	N/A	8'-0" x 10'-0"
3600T	CVR-TRO	3 hr	Hollow Metal Door	N/A	8'-0" x 10'-0" (std. pairs)
3600T	CVR-TRO	3 hr	Hollow Metal Door	N/A	8'-0" x 8'-0" (double egress)
3600T	CVR-TRO	1-1/2 hr	Hollow Metal Door	N/A	8'-0" x 10'-0" (double egress)

### Certifications

UL 305 Panic Hardware

3600 only: UL10C fire-rated, up to 3 hours

CAN/ULC S104 fire door conformant

NFPA 252 fire door conformant

ANSI/BHMA A156.3, Grade 1

### **Features**

### Materials

Push bar made of extruded aluminum, cladded or anodized in a variety of finishes.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Bar Height**

Standard model adjusts from 30" [762 mm] to 44" [1117.6 mm].

### Handing

Device is non-handed.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard, up to 2-1/4" [57.2 mm].

### **Door Height**

Standard configuration suitable for doors up to 66" [1,676.4 mm] above the selected bar height. For doors over 66" [1,676.4 mm] above bar height, up to 10' [3.05 m] use 3655 Tall Door Kit available separately.

### Stile Width

Minimum 3-1/2" [88.9 mm]. Door construction may require additional stile width to meet fire ratings and provide adequate strength.

### Stile Wall

Doors with stile walls other than 1/8" [3.2 mm] require modification.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### **Dogging**

Standard dogging with hex key or with cylinder not available on firerated exit devices. Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.



### **Fasteners**

Standard self-tapping screws and machine screws. Optional Sex Bolt Kits 26-0584 (two required per device) available separately.

### Cylinders

Accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Cylinder x Fixed Pull Functions**

For entry trim function 03 (Night latch key releases latch) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder.

If key entry operation is required, any standard mortise cylinder with MS® cam can be installed through an 8650 Cylinder Escutcheon. 8650 Cylinder Escutcheon Kit available separately.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Bolts and Strikes**

The patented top latching mechanism utilizes a rotating top bolt which deadlatches around the header strike, interlocking the door to the frame. Supplied with standard header strike. Adjustable protected steel rods. The hexagonal, hardened steel bottom bolt is shielded in a cast housing for strength and stability.

### Standard Package

Individually boxed.


### **Shipping Weight**

12 lbs [5.44 kg]

### **Options**

- Available in top rod only version, less bottom rod. Specify by adding "T" after exit device model number.
- Electrification Options
- Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps


For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.





**TOP ROD** 

ONLY



### How to Order & Related Products

8500, 3600 Metal Door Concealed Vertical Rod Exit Device: Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR F <b>I</b> N <b>I</b> SH	ROD TYPE	DEVICE OPTIONS	MONITORING OPTION	DOOR OPENING WIDTH On pair of doors, specify HALF of the total exit opening		US FINISH	END CAPS OPTION FOR US FINISH
85	00	Т	ED	М	-36			
36 Fire Rated	00 US Finish	T Top Rod only	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps
85 Life-Safety	11 Clear Anodized 628	- Standard rod	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass	
	22 Dark Bronze Anodized 313		C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor		Exit Device where or opening width	US32 Bright Stainless	
	33 Black Anodized 335		A Alarm - No Option				US32D Satin Stainless	

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option.

TRIM	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150, 3001 Fixed Pull (for hollow metal or wood)	Operable by 4036 Mortise Cylinder depending upon the ANSI/BHMA functions of the exit device	26-0584 Sex Bolt Kit (two required per device) 3655 Tall Door Kit REX-Monitor/Signal Kits 8650 Cylinder Escutcheon Kit	PS-EXIT Power Supply (replaces PS-SE and PS-LR models), 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier











# Narrow Stile Concealed Vertical Rod Exit Device

The 8600 Series Narrow Stile Concealed Vertical Rod Exit Device is designed for narrow stile aluminum applications that require a lifesafety exit device with concealed vertical rods for two-point locking. Designed for use in applications with single doors or pairs of doors.

### Certifications

UL 305 Panic hardware
ANSI/BHMA A156.3, Grade 1



### **Features**

### Materials

Push bar made of extruded aluminum, cladded or anodized in a variety of finishes.

### Handing

Device is non-handed.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Bar Height**

Standard model adjusts from 30" [762 mm] to 44" [1117.6 mm].

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard, up to 2-1/4" [57.2 mm]. Device requires modification when used with cylinder in doors over 1-3/4" [44.5 mm]. Please contact factory for more details.

### **Door Height**

Standard configuration suitable for doors up to 66" [1,676.4 mm] above the selected bar height. For doors over 66" [1,676.4 mm] above bar height, up to 10' [3.05 m] use 8655 Tall Door Kit available separately.

### Stile Width

Minimum 2" [50.8 mm] stile. Fits narrow, medium, and wide stile aluminum doors.

### Stile Wall

Doors with stile walls other than 1/8" [3.2 mm] require modification.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### **Dogging**

Standard dogging with hex key or optional cylinder dogging.
Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### **Fasteners**

Standard machine screws.

### Cylinders

Accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.



8600 Series **Narrow Stile** 

Concealed

Vertical Rod

**Exit Device** 

### Cylinder x Fixed Pull Functions

For entry trim function 03 (Night latch - key releases latch) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accepts any standard mortise cylinder with MS® cam.

If key entry operation is required, any standard mortise cylinder with MS® cam can be installed through an 8650 Cylinder Escutcheon. 8650 Cylinder Escutcheon Kit available separately.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with  $MS^{\circledR}$  cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Bolts and Strikes**

The patented top latching mechanism utilizes a rotating top bolt which deadlatches around the header strike, interlocking the door to the frame. Supplied with standard header strike. Adjustable protected steel rods. The hexagonal, hardened steel bottom bolt is shielded in a cast housing for strength and stability.

### **Standard Package**

Individually boxed.

### **Shipping Weight**

12 lbs [5.44 kg]

### **Options**


 Available in top rod only version, less bottom rod. Specify by adding "T" after exit device model number.

### Electrification Options

• Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps

For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions



### How to Order & Related Products

8600 Narrow Stile Surface Vertical Rod Exit Device Specify guantity and the following information. Order related products separately.

MODEL	PUSH BAR FINISH	ROD TYPE	DEVICE OPTIONS	DEVICE OPTIONS  MONITORING OPTION  DOOR OPENING WIDTH On pair of doors, specify HALF of the total exit opening		US FINISH	END CAPS OPTION FOR US FINISH	
86	22	Т	MLR	M2	-3	-36		
86 Life-Safety	00 US Finish	T Top Rod only	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps
	11 Clear Anodized 628	<ul> <li>Standard rod</li> </ul>	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches <b>48</b> 48 inches		<b>US4</b> Satin Brass	
	22 Dark Bronze Anodized 313		C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor	AXXB Alarmed E XX is door	xit Device where opening width	US32 Bright Stainless	
	33 Black Anodized 335		<b>A</b> Alarm				US32D Satin Stainless	
	Anoulzed 555		(Blank) No Option				Stairness	

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option.

	5 1 /1	3 '	,
TRIM	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150	Operable by 4036 Mortise Cylinder depending upon the ANSI/BHMA functions of the exit device	8655 Tall Door Kit 8650 Cylinder Escutcheon kit REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE and PS-LR models) , 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier













3700 Only



# Series Fire-Rated Rim Exit Device Series Life-Safety Rim Exit Device

The 3700 Series Fire-Rated Rim Exit Device is designed for hollow metal and wood applications that require a fire-rated exit device with Starwheel interlocking solution.

The **8700 Series Rim Exit Device** is designed for hollow metal and wood applications that require a life-safety exit device with Starwheel interlocking solution.

Designed for use in applications with single doors or pairs of doors with a mullion.

MODEL	TYPE	RATING	DOOR CONSTRUCT <b>I</b> ON	MAX SIZE SINGLE DOORS	MAX SIZE PAIR & DOUBLE EGRESS
3700	(RE) Rim Exit	3 hr	Hollow Metal DoorWood Door	4'-0" x 10'-0"	8'-0" x 10'-0"

### Certifications

UL 305 Panic Hardware

3700 Only: UL10C fire-rated, up to 3 hours

CAN/ULC S104 fire door conformant NFPA 252 fire door conformant ANSI/BHMA A156.3, Grade 1

### **Features**

### **Materials**

Push bar made of extruded aluminum, clad or anodized in a variety of finishes.

### Handing

Device is non-handed

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard, up to 2-1/4" [57.2 mm]

### Stile Width

Minimum 3-3/4" [95.3 mm]. Door construction may require additional stile width to meet fire ratings and provide adequate strength.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### Dogging

Standard dogging with hex key or cylinder dogging for 8700 Series only. Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### **Fasteners**

Standard self-tapping screws and machine screws. Optional Sex Bolt Kits 26-0584 (two required per device) available separately.

### Cylinders

Select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### Cylinder x Fixed **Pull Functions**

For function 03 (Night latch - key releases latch) select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder.

### **Entry Trim Functions**

For entry trim function 08 (key locks/ unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.



### Strike

Standard hardened steel strike (included).

### Standard Package

Individually boxed.


### **Shipping Weight**

10 lbs [4.54 kg]

### **Removable Mullion**

Allows the use of rim exit devices on paired doors without narrowing the doors. Provides higher security and better traffic flow than paired doors with vertical rod exit devices. 3889 Steel Mullion available separately. Select for use with doors up to 8' [2.44 m].





### **Options**


Electrification Options

Motorized Latch Retraction, Electric Latch Retraction (EL), Alarm, Monitoring, Cylinder Dogging, Matching End Caps


For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.


### Starwheel Bolt

**1.** When door closes, the interlocking noseguard and Starwheel bolt close around the strike. The deadlocking slide spring over, locking the Starwheel bolt to the strike.




2. When push bar is depressed, the deadlocking slide moves back, allowing the door to unlock from the strike. This unique interlock provides solid security and prevents jamb spreading.





### Strike Dimensions

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions



### How to Order & Related Products

8700, 3700 Rim Exit Device: Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR FINISH	DEVICE OPTIONS	MONITORING OPTION	On pair of doo	ENING WIDTH rs, specify HALF of exit opening	US FINISH	END CAPS OPTION FOR US FINISH	VOLTAGE**
87	00	EL	M2	_	36			-12
37 Fire Rated	00 US Finish	<b>EL</b> Electric Latch Retraction (solenoid)	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps	12 Volts
<b>87</b> Life- Safety	01 Clear Anodized 628	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass		24 Volts
	02 Dark Bronze Anodized 313	C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor	AXXB Alarmed Exit Device where XX is door opening width		US32 Bright Stainless	]	
	03 Black Anodized 335	<b>A</b> Alarm				US32D Satin Stainless		
		- No Option	1					

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, EXCEPT when ordered in conjunction with the MLR option. \*\*EL Option Only.

TRIM	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150, 3001 Fixed Pull (for hollow metal or wood)	Operable by either 4036 Mortise Cylinder	26-0584 Sex Bolt Kit (two	PS-EXIT Power Supply (replaces PS-SE
	or 8736 Rim Cylinder depending upon the	required per device)	model), 4612 Power Transfer Device,
	ANSI/BHMA functions of the exit device	REX-Monitor/Signal Kits	4605 Transformer, 4603 Rectifier



### Narrow Stile Rim Exit Device









The 8800 Series Narrow Stile Rim Exit Device is designed for narrow stile aluminum applications that require a life-safety exit device with Starwheel interlocking solution. Designed for use in applications with single doors or pairs of doors with a mullion.

### Certifications

UL 305 Panic Hardware

ANSI/BHMA A156.3, Grade 1



### **Features**

### **Materials**

Push bar made of extruded aluminum, clad or anodized in a variety of finishes.

### Handing

Device is non-handed.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard, up to 2-1/4" [57.2 mm].

### Stile Width

Minimum 2" [50.8 mm] stile. Fits narrow, medium, and wide stile aluminum doors.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### **Dogging**

Standard dogging with hex key or optional cylinder dogging.
Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### **Fasteners**

Standard machine screws.

### Cylinders

Select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### Cylinder x Fixed Pull Functions

For function 03 (Night latchkey releases latch) select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### Strike

Standard strike and narrow versions for centering doors in 4" jamb (both strikes included).

### Standard Package

Individually boxed.

### **Shipping Weight**


10 lbs [4.54 kg]

### **Removable Mullion**

Allows the use of rim exit devices on paired doors without narrowing the doors. Provides higher security and better traffic flow than paired doors with vertical rod exit devices.

3890 Aluminum Mullion available separately. Select for use with doors up to 8' [2.44 m] or 10' [3.05 m]. Available in 313 Dark bronze anodized or 628 Clear anodized finish.





### **Options**

### • Electrification Options

Motorized Latch Retraction, Electric Latch Retraction (EL), Alarm, Monitoring, Cylinder Dogging, Matching End Caps




Stile Rim


**Exit Device** 

### Starwheel Bolt

**1.** When door closes, the interlocking noseguard and Starwheel bolt close around the strike. The deadlocking slide spring over, locking the Starwheel bolt to the strike.




2. When push bar is depressed, the deadlocking slide moves back, allowing the door to unlock from the strike. This unique interlock provides solid security and prevents jamb spreading.




For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.

### Strike Dimensions

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions







Shown with 7800 Electric Strike

### How to Order & Related Products

8800 Rim Exit Device: Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR F <b>INI</b> SH	DEVICE OPTIONS	MONITORING OPTION	On pair of door	NING WIDTH s, specify HALF exit opening	US FINISH	END CAPS OPTION FOR US FINISH	VOLTAGE
88	01	С	M2	-3	36			-12
88 Life-Safety	00 US Finish	<b>EL</b> Electric Latch Retraction (solenoid)	<b>M</b> Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps	12 Volts
	<b>01</b> Clear Anodized 628	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass		<b>24</b> Volts (For EL Option Only)
	<b>02</b> Dark Bronze Anodized 313	C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor	where XX	AXXB Alarmed Exit Device where XX is door			
	03 Black Anodized 335	A Alarm		opening '	width	US32D Satin Stainless		
	333	- No Option				Stalliless		
						BSP Black Suede Powder		

<sup>\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option. \*\*EL Option Only.

TRIM	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150	Operable by either 4036 Mortise Cylinder or 8736 Rim Cylinder depending upon the ANSI/BHMA functions of the exit device	REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE model), 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier



# P8800 | P8700

### Pullman Rim Exit Device













Pullman Rim Exit Devices are designed for narrow stile aluminum (P8800), hollow metal and wood (P8700) applications that require a life-safety exit device with Pullman latching solution. The P8800 and P8700 features a 3/4" stainless steel Pullman latchbolt.

### **Function**

When the door closes, the 3/4" throw deadlocking stainless steel Pullman latchbolt nests inside the strike assembly and the smaller deadlatch rests on the strike assembly activating the deadlatching feature. When the active pushbar is depressed, both the Pullman latchbolt and the smaller deadlatch are retracted, allowing the door to open.

Suitable for use on single doors, or with mullion on pairs of doors. Designed for optimal performance in high-use areas.



UL 305 Panic Hardware ANSI/BHMA A156.3, Grade 1





### **Features**

### Materials

Active pushbar and back bar made of extruded aluminum, available in choice of finishes.

### Handing

Device is non-handed.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Door Thickness**

- Suitable for use with all door thickness.
- Can be used with trim on 1-3/4" thick doors, up to 2-1/4" door thickness.
- When cylinders are required, select rim cylinder length based upon door thickness

### Stile Width

Minimum 2" stile. Fits ultranarrow, narrow, medium and wide stile aluminum doors.

### **Projection**

2-1/2" when fully projected, 1-3/4" when dogged.

### Dogging

Standard dogging with 3/16" hex key.

### **Fasteners**

Device mounted using standard type 'F' self-tapping screws. Rivnuts are provided for the P8700 only.

### **Strike**

Horizontally adjustable strike assembly body made of Zamak 5 with hardened steel roller. Standard strike assembly suitable for centering doors in 4" jamb. Strike plate adjusts 1/4" horizontally.



### **Cylinders**

Select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder. Available separately.

### **Cylinder x Fixed Pull Functions**

For function 03 (Night latch - key releases latch) select any standard 1-5/32" [29.4 mm] diameter rim cylinder such as the 8736 Rim Cylinder.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Standard Package**

Individually boxed.

### **Shipping weight**

10 lbs [4.54 kg]

### **Options**

### • Electrification Options

Motorized Latch Retraction (MLR), Alarm, Monitoring

 Cylinder Dogging, Matching End Caps (optional metallic end caps finished to US options)

### Finishes

See How to Order for all options (see current 8800 page for reference on treatment)

For more detailed information on any of the options listed above please see the Exit Devices Options page of this catalog.

### How to Order & Related Products

**P8800 I P8700 Pullman Rim Exit Device:** Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR F <b>I</b> N <b>I</b> SH	DEVICE OPTIONS	MONITORING OPTION	On pair of d	NING WIDTH oors, specify tal exit opening	US FINISH	END CAPS OPTION FOR US FINISH
P88	O1	С	M2	-3	36		
P88 For	00 US Finish	MLR Motorized Latch Retraction	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching
aluminum	01 Clear Anodized 628	C Cylinder Dogging **	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass	End Caps
P87 For hollow	02 Dark Bronze	(non-fire rated devices ONLY)	(Blank) No Monitor	AXXB Alarmed Exit Device where XX is door opening width		US32 Bright Stainless	
metal & wood	Anodized 313	A Alarm				US32D Satin Stainless	
	03 Black Anodized 335	(Blank) No Option					

<sup>\*</sup>Please note that 30" exit devices cannot accommodate monitoring options, except when ordered in conjunction with MLR option.

ELECTRIC STRIKES	TRIM	CYLINDER	ACCESSORIES	POWER
74R1 Electric Strike	3080, 3080E Series Entry Trim, 3090-150, 3001 Fixed Pull (for hollow metal or wood)	Operable by either 4036 Mortise Cylinder or 8736 Rim Cylinder depending upon the ANSI/BHMA functions of the exit device	26-0584 Sex Bolt Kit (two required per device) REX-Monitor/Signal Kits	PS-EXIT (replaces PS-SE & PS-LR models), 4612 Power Transfer, 4603 Rectifier, 4605 Transformer



<sup>\*\*</sup> Cylinder dogging cannot be combined with any other exit device option.













### 3900 Series Fire-Rated Surface Concealed Vertical Rod Exit Device

### Series Life-Safety Surface Concealed Vertical Rod Exit Device

The **3900 Series Fire-Rated Surface Concealed Vertical Rod Exit Device** is designed for wood applications that require a fire-rated exit device with concealed vertical top rod and surface concealed actuator single-point latching in header.

The 8900 Series Surface Concealed Vertical Rod Exit Device is designed for wood applications that require a life-safety exit device with concealed vertical top rod and surface concealed actuator single-point latching in header.

Designed for use in applications with single doors or pairs of doors.

MODEL	TYPE	RATING	DOOR CONSTRUCTION	MAX SIZE SINGLE DOORS	MAX SIZE PAIR & DOUBLE EGRESS
3900	CVR-TRO	1-1/2 hr	Wood Door	4'-0" x 9'-0"	8'-0" x 9'-0"

### Certifications

UL 305 Panic Hardware

**3900 Only:** UL10C fire-rated, up to 1-1/2 hours

CAN/ULC S104 fire door conformant NFPA 252 fire door conformant ANSI/BHMA A156.3, Grade 1

### **Features**

### **Materials**

Push bar made of extruded aluminum, cladded or anodized in a variety of finishes.

### Handing

Device is non-handed.

### **Push bar Length**

Standard sizes: dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings. Standard width bars can be field cut to the next smallest opening width.

### **Bar Height**

Standard model adjusts from 30" [762 mm] to 44" [1117.6 mm].

### **Door Height**

Standard configuration suitable for doors up to 66" [1,676.4 mm] above the selected bar height. For doors over 66" [1,676.4 mm] above bar height, up to 10' [3.05 m] use 3955-01 Tall Door Kit available separately.

### **Door Thickness**

Suits 1-3/4" [44.5 mm] standard.

### **Projection**

2-5/8" [66.7 mm] when fully projected, 1-5/8" [41.3 mm] when dogged.

### Dogging

Standard dogging with hex key or with cylinder not available on fire-rated exit devices. Electric Dogging option has been discontinued. Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see Options & Accessories.

### **Fasteners**

Standard self-tapping screws and machine screws. Optional Sex Bolt Kits 26-0584 (two required per device) available separately.



### Cylinders

Operable with mortise cylinder (4036) only via 3080 Entry Trim.

### **Entry Trim Functions**

For entry trim function 08 (key locks/unlocks lever) or function 09 (key releases lever) select any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. Accommodates cylinder lengths from 1" [25.4 mm] to 1-1/4" [31.8 mm]. Available separately.

### **Bolts and Strikes**

The patented top latching mechanism utilizes a rotating top bolt which deadlatches around the header strike, interlocking the door to the frame. Supplied with standard header strike. Adjustable protected steel rods. The hexagonal, hardened steel bottom bolt is shielded in a cast housing for strength and stability. For wood frames, an additional plate is supplied for securing the header strike.

### **Standard Package**

Individually boxed.


### **Shipping Weight**


12 lbs [5.44 kg]

### **Options**

- Available in top rod only version, less bottom rod. Specify by adding "T" after exit device model number.
- Electrification Options
- Motorized Latch Retraction, Electric Latch Retraction (LR), Alarm, Monitoring, Cylinder Dogging, Matching End Caps

For more detailed information on any of the options listed above please see the Exit Devices Options on page 97 of this catalog.








Plate for wood frames are furnished with 8900

### How to Order & Related Products

8900, 3900 Rim Exit Device: Specify quantity and the following information. Order related products separately.

MODEL	PUSH BAR FINISH	DEVICE OPTIONS	MONITORING OPTION	On pair of doo	ENING WIDTH rs, specify HALF of exit opening	US FINISH	END CAPS OPTION FOR US FINISH
89	00	LR	M2		36		
39 Fire Rated	00 US Finish	LR Electric Latch Retraction (solenoid)	M Single Switch	<b>30</b> 30 inches*	<b>42</b> 42 inches	US3 Bright Brass	MEC Matching End Caps
89 Life-Safety	11 Clear Anodized 628	MLR Motorized Latch Retraction	M2 Dual Switch	<b>36</b> 36 inches	<b>48</b> 48 inches	US4 Satin Brass	
	22 Dark Bronze Anodized 313	C Cylinder Dogging (non-fire rated devices ONLY)	(Blank) No Monitor		Exit Device where or opening width	US32 Bright Stainless	
	33 Black Anodized 335	A Alarm				US32D Satin	
		- No Option				Stainless	

<sup>\*\*</sup> Please note that 30" exit devices cannot accommodate montitoring options, except when ordered in conjunction with the MLR option.

TRIM	CYLINDER	ACCESSORIES	POWER
3080, 3080E Series Entry Trim, 3090-150, 3001 Fixed Pull (for hollow metal or wood)	Operable with mortise cylinder (4036) only via 3080 Entry Trim	26-0584 Sex Bolt Kit (two required per device) REX-Monitor/Signal Kits	PS-EXIT Power Supply (replaces PS-SE and PS-LR models) , 4612 Power Transfer Device, 4605 Transformer, 4603 Rectifier









# 8099 Dummy Push Bar

The 8099 Dummy Push Bar is designed for narrow stile aluminum, hollow metal, and wood applications that do not require a latching/locking life-safety exit device.

### **Function**

Dummy Push Bar with no latch mechanism but with either single or dual monitor/signal switches. May be used in conjunction with a maglock, where the push bar turns off the magnet and allows exit from the building. Dual switch version allows redundancy where required by code or the operation of a signal device. Designed for applications with single or pairs of doors.

### **Features**

### **Materials**

Push bar made of extruded aluminum, available variety of architectural finishes.

### Stile Width

- For hollow metal and wood applications: minimum 3-3/4" [95.3 mm]
- For aluminum applications: minimum 2" [50.8 mm] stile.

### **Fasteners**

- For hollow metal and wood applications: standard self-tapping screws and machine screws.
- For aluminum applications: standard machine screws.

### **Push Bar Length**

**Standard sizes:** dimensioned for 30" [762.0 mm], 36" [914.4 mm], 42" [1,066.8 mm], and 48" [1,219.2 mm] openings.

### Standard Package Individually boxed.

### **Shipping Weight**

6 lbs [2.72 kg].

### **Options**

- **8099M0**: Active dummy push bar, no monitoring switches
- **8099M1:** Active dummy push bar, single monitoring switch
- **8099M2**: Active dummy push bar, dual monitoring switches
- Available for aluminum, hollow metal and wood applications.
   Specify door type and width when ordering.
- Optional Sex Bolt Kits 26-0584 (two required per device) available separately.

### How to Order

8099 Dummy Push bar Specify quantity and the following information. Order related products separately.

MODEL	MONITOR	DOOR TYPE	PUSH BAR FINISH	WIDTH	US FINISH
8099	-M1	-3	0	36	
	MO Active Dummy Bar, no monitoring switch	3 Aluminum	0 US Finish	<b>30</b> 30 inches	US3 Bright Brass
	M1 Active Dummy Bar, one monitoring switch	4 Wood or	1 Clear Anodized 628	<b>36</b> 36 inches	US4 Satin Brass
	M2 Active Dummy Bar, two monitoring switch	Hollow Metal	2 Dark Bronze Anodized 313	<b>42</b> 42 inches	US32 Bright Stainless
			3 Black Anodized 335	<b>48</b> 48 inches	US32D Satin Stainless



# Options & Accessories


Adams Rite Exit Devices can be ordered with electrification options for standalone access control or integration with maglocks, card readers, keypads, fire alarms, power door operators, and other control systems. Different exit device types have different installation and power requirements. Please refer to product pages for detailed information.

### Motorized Latch Retraction

The Motorized Latch Retraction (MLR) option incorporates a powerful and efficient motor to unlatch the exit device. Motor-powered latch retraction provides a quieter operation than solenoid options.

- · No calibration required for installation
- Robust linkage mechanism for extended operation
- · Motor-driven latch retraction
- Available for 30" 48" doors
- 850mA during retraction and 370mA maintained in dogged hold position
- Requires 2A at 24 VDC regulated/ filtered power supply

- · Continuous or intermittent use
- Configured for fail-secure. In the event of a power failure, the exit device defaults to latched condition
- Available for panic and fire exit hardware
- Compatible with REX monitoring
- Order PS-EXIT Power Supply separately; power and control up to two MLR or LR exit devices in single or dual input
- operations, see POWER for additional details (Product note: PS-EXIT replaces legacy PS-SE model). Adams Rite recommends that for optimal performance all exit devices with the MLR option be paired with PS-EXIT power supplies.
- 4612 Power Transfer is available separately for secure and unobtrusive means of channeling electrical wiring from the door frame into the door itself.

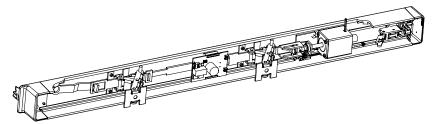

### Electric Latch Retraction (solenoid)

The EL option for rim exit devices and LR option for all other exit devices (non-rim exit devices) use a solenoid mounted under the pushbar for instantaneous unlocking and locking of the exit device from a remote location or access control device. Because electrical operation of device is fail-secure, this option can be used on fire-rated as well as life-safety applications. In the event of a power failure, device automatically relocks.

### **LR Option**

- Solenoids are rated for both intermittent and continuous operation. Solenoid Specifications for CVR, SVR, and Mortise type devices (LR option):
- 16 Amps inrush/ 0.5 Amps hold

- Order PS-LR Power Supply separately for LR option (PS-LR powers two exit devices). Rated for continuous duty (see POWER). Adams Rite recommends that for optimal performance all CVR, SVR, and mortise type exit devices with the LR option are installed and powered using PS-LR power supplies.
- 4612 Power Transfer is available separately for secure and unobtrusive means of channeling electrical wiring from the door frame into the door itself.

### **EL Option**

Rim devices with the EL option are available in 12 or 24 VDC, and can be powered with a simple transformer and rectifier or other DC power supply.

• EL-12 VDC – 1.5 Amps inrush/hold

- EL-24 VDC 0.6 Amps inrush/hold
- Solenoids are rated for both intermittent and continuous operation. Only rim exit devices with the "EL" application are available with mechanical dogging, specify "ELD"
- Order PS-EXIT Power Supply separately; power and control up to two MLR or LR exit devices in single or dual input operations, see POWER for additional details (Product note: PS-EXIT replaces legacy PS-LR model). Adams Rite recommends that for optimal performance, all CVR, SVR, and Mortise type exit devices with the LR option are installed and powered using PS-EXIT power supplies.
- 4612 Power Transfer is available separately for secure and unobtrusive means of channeling electrical wiring from the door frame into the door itself.



# Options & Accessories

### Alarm

Suitable for all Adams Rite exit devices 36" wide or greater. This battery-operated alarm option emits a loud 95 decibel alarm to notify management of unauthorized exit. Alarm is controlled by a key in standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder. The cylinder is used to arm, disarm, delay, or reset the alarm. Will not alter the life-safety characteristics of the exit device in any way. Red letters printed on the bar give a "hands off" warning to deter accidental activation. Four AA alkaline batteries power twin horns for two minutes (or until disarmed) when pushbar is depressed. Beeps to signal need for new batteries.



### **Monitor**

Mounted under the exit device pushbar on the hinge end, switches may be used to activate signal light, horn, monitor, or other devices. Switches can be wired for normally open or normally closed. Can be retrofit in field to existing exit devices. Dual switch version offers redundancy as required by some building codes or it can operate a second signaling device. Suitable for all Adams Rite exit devices.

- Order Monitor/Signal Kits for upgrading any 3000 or 8000 Series device: 91-0897-01 for Single Monitoring Switch Kit or 91-0897-02 for Dual Monitoring Switch Kit.
- M1: Single monitoring switch
- **M2**: Dual monitoring switches



### Cylinder Dogging

Suitable for all non-fire rated Adams Rite exit devices that require management control of exit device dogging. Any standard 15/16" [23.8 mm] to 1-1/8" [28.6 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder can be used in a pushbar prepared at factory with Cylinder Dogging kit. Cannot be ordered with any other exit device options.



### **Electric Dogging**

Motorized and Electric Latch Retraction options can replace Electric Dogging requirement, see the start of this section for more information.

### Matching End Caps

Standard Adams Rite exit devices come with black metal end caps. Matching end caps are available for applications where it is preferable that the end caps match the finish of the exit device. Available for US finishes only. Specify by adding "MEC" after the regular ordering matrix.



### **Related Products**

### Trim

- 3080 Series Entry Trim
- 3090 e-Force® Keyless Entry

### **Electric Strikes**

- 7100 Series, 7400 Series, 7800 Series (for 3300/8300, 8400 Mortise Exit Devices)
- 74R1 (for Pullman Rim Exit Devices)

### Cylinders

 4036 Mortise Cylinder or 8736 Rim Cylinder depending on ANSI/BHMA function

### **Power Supplies & Accessories**

- PS-EXIT
- 4612 Power Transfer, 4603 Rectifier, 4605

### Resources

### **Training**

Adams Rite provides a number of learning opportunities on a variety of physical access control and door hardware topics.

### **Exit Device Cut Down Matrix**

Scan the QR Code below to access a PDF of the Adams Rite Exit Device Cut-down Matrix.





Available exit bar finishes.



# Strikes



# LISTED







# 7100 Series

### Electric Strikes for Adams Rite Deadlatches & Cylindrical Locks

Designed for use with Adams Rite deadlatches or cylindrical locksets with 1/2" [12.7 mm] to 5/8" [15.9 mm] latchbolt projection. For use in aluminum, hollow metal, or wood applications.

### **Function**

Remote electrical control of any door equipped with an Adams Rite 4500, 4700 (discontinued), or 4900 Deadlatch or cylindrical lockset with 1/2" [12.7 mm] to 5/8" [15.9 mm] latchbolt projection. Electrical actuation unlocks the keeper, releasing the latchbolt so the door may be opened without operating the latch itself.

### Certifications

UL 1034 burglary-resistant listed UL 294 listed





7140

### **Features**

### Case

1" x 3-3/8" x 1-5/8" deep [25.4 mm x 85.7 mm x 41.3 mm deep].

### **Strike Opening**

5/8" x 1-7/16" x 1/2" deep [15.9 mm x 36.5 mm x 12.7 mm deep]. Bolt retaining keeper is stainless steel. Strike accepts bolt of any Adams Rite 4500, 4700 (discontinued), or 4900 Deadlatch or cylindrical latches.

### **Strike Lip**

Basic strike has lip of proper length for 1-3/4" [44.5 mm] thick door that closes flush with jamb edge. Where door thickness or jamb shape differs from this standard relationship. lip extension kits are available, specified by last dash number.

· Lip extension kits not available on 7101 or 7131.

### **Latchbolt Projection**

1/2" to 5/8" [12.7 mm to 15.9 mm]

### **Faceplate**

Available in a variety of architectural finishes. Faceplates are also available sold separately.

7100	1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]	Flat with radius corners
7101	1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]	Radiused to match nose on inactive leaf in a pair of narrow stile doors.
7110	1-7/16" x 7-15/16" [36.5 mm x 201.6 mm]	Flat with radius corners
7111	1-7/16" x 10-1/4" [36.5 mm x 260.4 mm]	Flat with radius corners
7130	1-1/4" x 6-7/8" [31.8 mm x 174.6 mm]	Flat with radius corners
7131	1-1/4" x 6-7/8" [31.8 mm x 174.6 mm]	Radiused to match nose on inactive leaf in a pair of narrow stile doors
7140	1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]	Flat with square corners

7130/7131: Large 6-7/8" faceplate is designed to cover strike opening when converting from an MS® pivotedbolt deadlock to deadlatch.



#### **Standard Package**

Individually boxed with mounting screws, mounting clips, adhesive shims to accommodate jamb or stile extrusion thickness greater or less than nominal 1/8" [3.2 mm].

7140 Includes mounting clips and adhesive shims for use where welded tabs are omitted.

#### **Shipping Weight**

2 lbs [0.91 kg].

## Electrical

#### Voltage

Available in 12, 16, or 24 Volt AC and DC. DC continuous units are silent, AC intermittent units "buzz" on operation.

#### **Current Draw**

#### Fail Safe | Fail Secure

Field selectable at time of installation. However, AC intermittent solenoid must not be used continuously in either.

# **Options**

- Available with two Form 'C' monitoring switches to indicate when the latchbolt is engaged in the strike and whether the strike jaw is blocked.
   Not available on 7130/7131, 7140.
- Lip extension kits for various dimensions of door centerline to jamb edge; for flat faceplates only.
   Not available on 7101 or 7131.

#### Modular Packaging

Match one strike body kit with one faceplate kit to make a complete electric strike. Faceplate kits contain all hardware to mount electric strike. Please contact factory or sales representative for details.

# **Related Products**


#### 7100/7101, 7110/7111, 7130/7131, 7140

When purchasing this product, please consider the following related products, available separately:

DEADLATCHES	EXIT DEVICES	ACCESSORIES	POWER
4510, 4530, 4900, 4920AN Series Deadlatches	8300, 8400 Mortise Exit Device	Lip Extension Kits, Modular Kits, Monitor Kits, Faceplate Kits	4603 Rectifier, 4605/4606 Transformer, Piezo Horn audible indicator, ElectroLynx connector




All measurements are approximate and are provided for informational purposes only Refer to the product Installation Instructions.

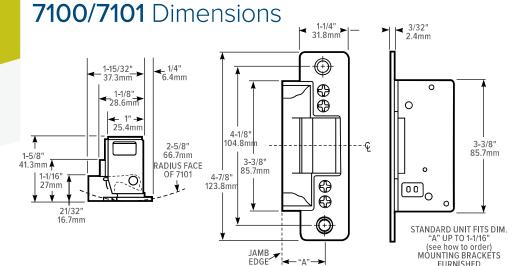

## Jamb Preparation Œ 31.8mm CYLINDER € OF ADAMS RITE LATCH 6-1/8" Φ. 155.8mm 1-7/16" 4-7/8" 36.5mm 123.8mm HORIZONTAL Ç OF ELECTRIC STRIKE LATCHBOLT 3-3/8" 85.7mm 5/32" R (4 PLACES) DRILL & CsK FOR 8-32 SCREW (2 PLACES) 21/32" VERTICAL $\P$ OF ELECTRIC STRIKE FACEPLATE DIRECTLY OPPOSITE $\P$ OF DEADLATCH

# Installation

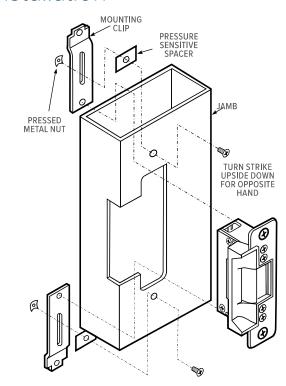

FURNISHED


# How to Order


7100/7101 Electric Strikes: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE SHAPE	VOLTAGE	CURRENT AND DUTY	FEATURES*	FINISH**	LIP EXTENSIONS (DIM. A)*** (DOOR CENTERLINE TO JAMB EDGE	
710	0	-3	1	О	-628	-(	00
	0 Flat	<b>3</b> 12 Volt	1 DC Continuous or Intermittent	0 Standard/Fail-Secure	313 Dark Bronze Anodized	00 1-1/16" or less	<b>05</b> 2"
	1		2 DC with 4603 Rectifier	<b>5</b> Fail-Safe	335 Black Anodized	01 1-1/2"	07 2-1/4"
			4 AC Intermittent	<b>7</b> Monitored/ Fail-Safe	<b>626</b> Satin Chrome	02 1-5/8"	09 2-1/2"
				9 Monitored/Fail-Secure	628 Clear Anodized	03 1-3/4"	<b>12</b> 2-7/8"

\*Fail-secure can be field converted to fail-safe or vice-versa. \*\*7101 available in 313, 335, 628 only. \*\*\*Lip Extensions not available on 7101.



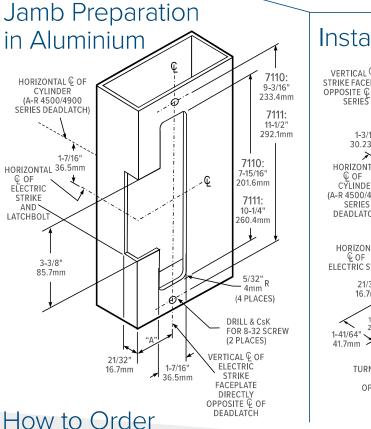

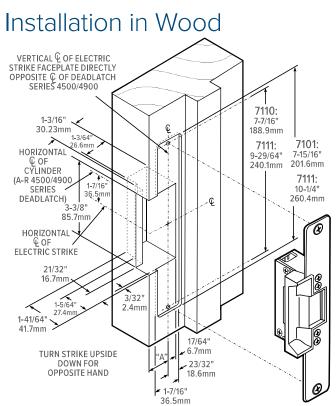

7110/7111 Electric Strikes: Specify quantity and the following information. Order related products separately.


MODEL	FACEPLATE LENGTH	VOLTAGE	CURRENT AND DUTY	FEATURES*	FINISH	LIP EXTENSIONS (DIM. A) (DOOR CENTERLINE TO JAMB EDGE	
711	0 -3		1	О	-652	-00	
	<b>0</b> 7-15/16"	<b>3</b> 12 Volt	1 DC Continuous or Intermittent	O Standard/Fail-Secure	<b>652</b> Satin Chrome	00 1-1/16" or less	05 2"
	<b>1</b> 10-1/4" <b>4</b> 16 V		2 DC with 4603 Rectifier	<b>5</b> Fail-Safe		01 1-1/2"	07 2-1/4"
		5 24 Volt 4 AC Intermittent		<b>7</b> Monitored/ Fail-Safe		02 1-5/8"	09 2-1/2"
				9 Monitored/Fail-Secure		<b>03</b> 1-3/4"	<b>12</b> 2-7/8"

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa




All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.



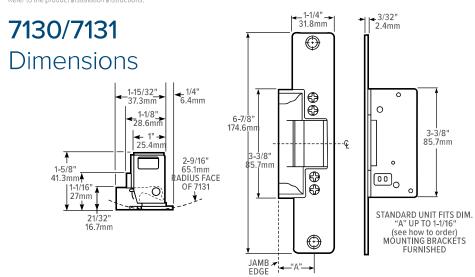

# Jamb Preparation Œ HORIZONTAL€ OF CYLINDER (A-R 4500/4900 Ø SERIES DEADLATCH) 8-1/4" 209.6mm 1-7/16" 36.5mm 6-7/8" 174.6mm - Q HORIZONTAL © OF — ELECTRIC STRIKE 3-3/8" 85.7mm 5/32" R 4mm R (4 PLACES) DRILL & CsK FOR 8-32 SCREW (2 PLACES) 21/32" 16.7mm VERTICAL © OF ELECTRIC STRIKE FACE PLATE DIRECTLY

# Installation

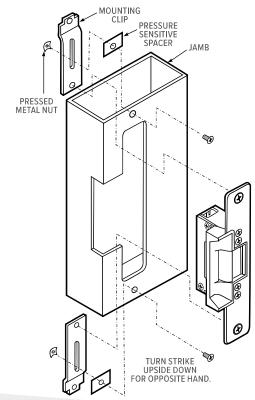

# How to Order

7130/7131 Electric Strikes: Specify quantity and the following information. Order related products separately.

OPPOSITE © OF DEADLATCH


MODEL	FACEPLATE SHAPE	VOLTAGE	CURRENT AND DUTY	FEATURES*	FINISH	LIP EXTENSIONS (DIM. A)** (DOOR CENTERLINE TO JAMB EDGE	
713	0	-3	1	0	-313	-00	
	<b>0</b> Flat	<b>3</b> 12 Volt	1 DC Continuous or Intermittent	O Standard/Fail-Secure	313 Dark Bronze Anodized	00 1-1/16" or less	05 2"
	1 Radius 4 16 Volt		2 AC DC with 4603 Rectifier	<b>5</b> Fail-Safe	335 Black Anodized	01 1-1/2"	<b>07</b> 2-1/4"
		<b>5</b> 24 Volt	4 AC Intermittent		<b>628</b> Clear Anodized	02 1-5/8"	09 2-1/2"
						03 1-3/4"	<b>12</b> 2-7/8"

\*Fail-secure can be field converted to fail-safe or vice-versa. \*\*Lip Extensions not available on 7131.









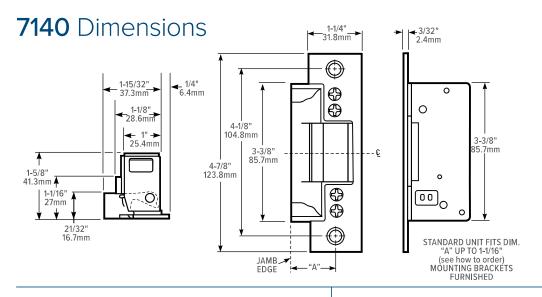

# Jamb Preparation in Wood

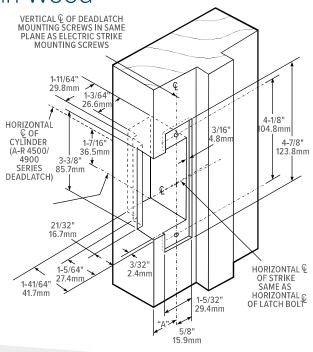

# Jamb Preparation & Installation in Steel

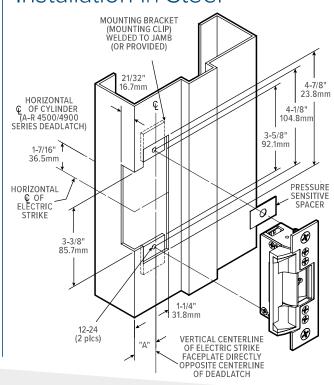

# How to Order

7140 Electric Strike: Specify quantity and the following information. Order related products separately.

MODEL	VOLTAGE	CURRENT AND DUTY	FEATURES*	FINISH	LIP EXTENSIONS (DIM. A) (DOOR CENTERLINE TO JAMB EDGE)	
7140	-3	1	О	-628	-00	
	<b>3</b> 12 Volt	1 DC Continuous or Intermittent	<b>0</b> Standard/Fail-Secure	313 Dark Bronze Anodized	00 1-1/16" or less	05 2"
	<b>4</b> 16 Volt	2 DC with 4603 Rectifier	<b>5</b> Fail-Safe	335 Black Anodized	<b>01</b> 1-1/2"	<b>07</b> 2-1/4"
	<b>5</b> 24 Volt	4 AC Intermittent		<b>626</b> Satin Chrome	02 1-5/8"	09 2-1/2"
				628 Clear Anodized	03 1-3/4"	<b>12</b> 2-7/8"

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa











# 7160, 7170

# Electric Strikes for Mortise or Cylindrical Locks

7160, 7170 Electric Strikes with 4-7/8" [123.8 mm] faceplates are designed for use with mortise or cylindrical type locksets with up to 3/4" [19.1 mm] latchbolt projection without deadbolt.

7160 Electric Strikes are for use in aluminum applications. 7170 Electric Strikes are for use in hollow metal or wood applications.

# **Function**

Remote electrical control of narrow stile aluminum doors (7160) or hollow metal/wood doors (7170) equipped with a mortise or cylindrical lockset with up to 3/4" [19.1 mm] latchbolt projection without deadbolt. Electrical actuation unlocks the keeper, releasing the latchbolt so the door may be opened without operating the latch itself. The electric strike must be positioned to accommodate offset mortise latches during installation. Please refer to installation instructions or contact factory for more information.



UL 1034 burglary-resistant listed

UL 294 listed





# **Features**

1" x 3-3/8" x 1-7/8" deep [25.4 mm x 85.7 mm x 47.6 mm].

#### Strike Opening

Bolt retaining keeper is stainless steel. Strike location must be centered on latchbolt.

7160: 3/4" x 1-7/16" x 5/8" deep [19.1 mm x 36.5 mm x 15.9 mm deep].

**7170**: 5/8" x 1-7/16" x 5/8" deep [15.9 mm x 36.5 mm x 15.9 mm deep].

#### Strike Lip

Basic strike has lip of proper length for 1-3/4" [44.5 mm] thick door that closes flush with jamb edge. Where door thickness or jamb shape differs from this standard relationship, lip extension kits are available, specified by last dash number.

#### **Latchbolt Projection**

3/4" [19.1 mm]

#### **Faceplate**

1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]. Available in a variety of architectural finishes.

7160: Flat with radius corners 7170: Flat with square corners

#### Standard Package

Individually boxed with mounting screws.

7160 includes mounting clips, adhesive shims to accommodate jamb or stile extrusion thickness greater or less than nominal 1/8" [3.2 mm].

7170 includes mounting clips and adhesive shims for use when welded tabs are omitted.

#### **Shipping weight**

2 lbs [0.91 kg].



# Electrical

#### Voltage

Available in 12, 16, or 24 Volt AC and DC. DC continuous units are silent, AC intermittent units "buzz" on operation.

#### **Current Draw**

#### Fail Safe | Fail Secure

Field selectable at time of installation. However, AC intermittent solenoid must not be used continuously in either.

# **Options**

- Available with two Form 'C' monitoring switches to indicate when the latchbolt is engaged in the strike and whether the strike jaw is blocked.
- Lip extension kits for various dimensions of door centerline to jamb edge.

#### Modular Packaging

Match one strike body kit with one faceplate kit to make a complete electric strike. Faceplate kits contain all hardware to mount electric strike. Please contact factory or sales representative for details.

#### **Product Note**

All 3/4" throw latches require 1/8" minimum door gap. Horizontal center line of strike must match line of mortise latchbolt.

# How to Order

7160, 7170 Electric Strikes: Specify quantity and the following information. Order related products separately.

MODEL	APPLICATION	VOLTAGE	CURRENT AND DUTY	FEATURES*	FINISH	LIP EXTENSIONS (DIM. A) (DOOR CENTERLINE TO JAMB EDGE)	
71	60	-3	1	О	-628	-00	
	<b>60</b> Aluminum Jambs	3 12 Volt	1 DC Continuous or Intermittent	<b>0</b> Standard/Fail-Secure	313 Dark Bronze Anodized	00 1-1/16" or less	<b>05</b> 2"
	70 Hollow Metal, Wood	4 16 Volt	2 AC DC with 4603 Rectifier	<b>5</b> Fail-Safe	335 Black Anodized	<b>01</b> 1-1/2"	<b>07</b> 2-1/4"
		<b>5</b> 24 Volt	4 AC Intermittent	7 Monitored/ Fail-Safe	<b>626</b> Satin Chrome	02 1-5/8"	09 2-1/2"
			9 Monitored/Fail-Secure	628 Clear Anodized	03 1-3/4"	<b>12</b> 2-7/8"	

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa

#### **RELATED PRODUCTS**


When purchasing this product, please consider the following related products, available separately:

	J		7.1			9				,	
		ACCES	SORIES				PO	WER			
Lip Extension	n Kits, M	lodular K	its, Monito	r Kits, Facep	olate Kits	4603 Rec Horn audi			,		




# 7160 Dimensions




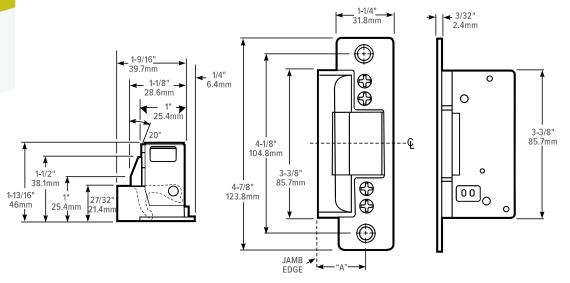

# Jamb Preparation

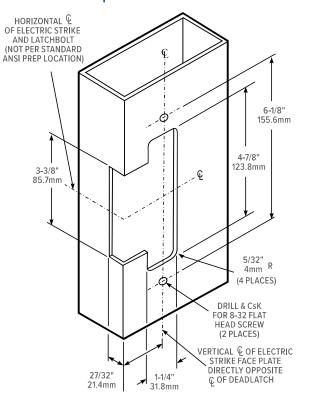


# Installation

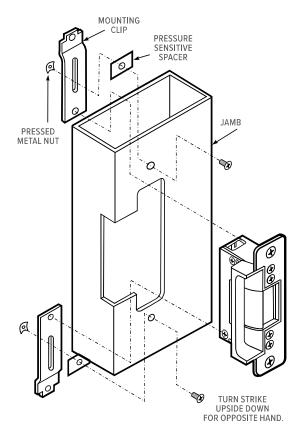




# 7170 Dimensions

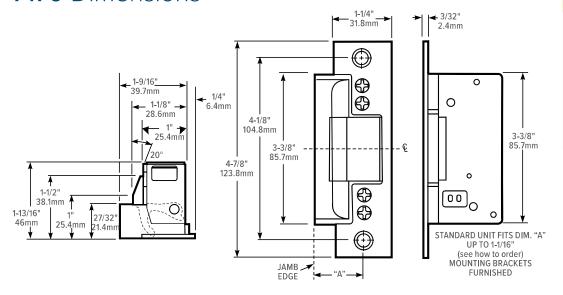




# Jamb Preparation in Wood

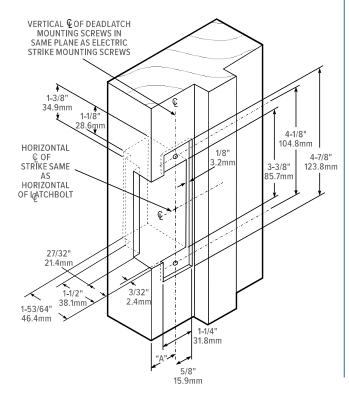

# Jamb Preparation & Installation in

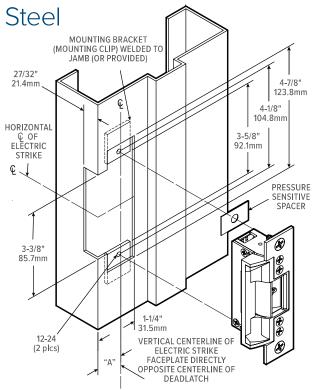











# 7200 Series

# Fire-Rated Electric Strikes

**7240 Fire-Rated Electric Strikes** with 4-7/8" [123.8 mm] faceplates are designed for cylindrical locksets with up to 5/8" [15.9 mm] latchbolt projection.

**7270 Fire-Rated Electric Strikes** with 4-7/8" [123.8 mm] faceplates are designed for mortise or cylindrical locksets with up to 3/4" [19.1 mm] latchbolt projection without a deadbolt.

Both models are for use in hollow metal door jambs.

# **Function**

Remote electrical control of hollow metal doors equipped with cylindrical locksets with up to 5/8" [15.9 mm] latchbolt projection (7240) or mortise or cylindrical lockset with up to 3/4" [19.1 mm] latchbolt projection (7270). Electrical actuation unlocks the keeper, releasing the latchbolt so the door may be opened without operating the latch itself. Fire-rated in fail secure mode only.



UL 10C fire rated, 3 hour single door (fail secure only) CAN/ULC-S104 fire door conformant





(4)

7270

# **Features**

#### Case

**7240**: 1" x 3-3/8" x 1-5/8" deep [25.4 mm x 85.7 mm x 41.3 mm deep]

**7270:** 1" x 3-3/8" x 1-7/8" deep [25.4 mm x 85.7 mm x 47.6 mm deep]

#### **Strike Opening**

Bolt retaining keeper and strike lip are stainless steel. Strike accepts bolts from a variety of locksets.

**7240:** 5/8" x 1-7/16" x 9/16" deep [15.9 mm x 36.5 mm x 14.3 mm deep]

**7270:** 3/4" x 1-7/16" x 5/8" deep [19.1 mm x 36.5 mm x 15.9 mm deep]

#### Strike Lip

Basic strike has lip of proper length for 1-3/4" [44.5 mm] thick door that closes flush with jamb edge.

#### **Faceplate**

Measures 1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]; flat with square corners

#### **Latchbolt Projection**

**7240**: 5/8" [15.9 mm] **7270**: 3/4" [19.1 mm]

#### Standard Package

Individually boxed with mounting screws. Includes mounting clips and adhesive shims for use where welded tabs are omitted.

#### **Shipping Weight**

2 lbs [0.91 kg].



# Electrical

#### Voltage

Available in 12 or 24 Volt AC and DC. DC continuous units are silent, AC intermittent units "buzz" on operation.

#### **Current Draw**

0.33 A at 12 VDC 1.42 A at 12 VAC 0.17 A at 24 VDC 0.74 A at 24 VAC

#### Fail Safe | Fail Secure

Assembled for fail-secure (locked when unpowered) operation.

# **Options**

- Available with two Form 'C' monitoring switches to indicate when the latchbolt is engaged in the strike and whether the strike jaw is blocked.
- Available with lip extension kit. Specify when ordering if required.

#### **Product Note**

All 3/4" throw latches require 1/8" minimum door gap. Horizontal center line of strike must match line of mortise latchbolt.

# How to Order

7240, 7270 Electric Strikes: Specify quantity and the following information. Order related products separately.

MODEL	APPLICATION	VOLTAGE	CURRENT AND DUTY	FEATURES*	FINISH	LIP EXTENSIONS (DIM. A) (DOOR CENTERLINE TO JAMB EDGE FOR INTERIOR FRAMES)
72	40	-3	1	0	-630	-50
	40 Cylindrical Latches	<b>3</b> 12 Volt	1 DC Continuous or Intermittent	<b>0</b> Fail-Secure	630 Satin Stainless	00 1-1/16" or less
	70 Mortise Latches	e Latches 5 24 Volt 2 DC with 4603 Rectifier		9 Monitored/Fail-Secure		50 1-3/8"
			4 AC Intermittent			

<sup>\*</sup>Not available Fail-Safe


# Related Products

When purchasing this product, please consider the following related products, available separately:


ACCESSORIES	POWER
Lip Extension Kits	4603 Rectifier, 4605/4606 Transformer, Piezo Horn audible indicator, ElectroLynx connector




# 7240 Dimensions

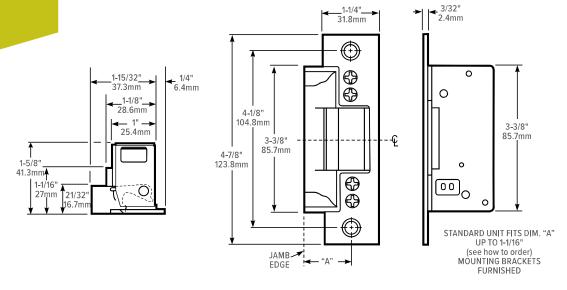

# Installation in Steel Jamb

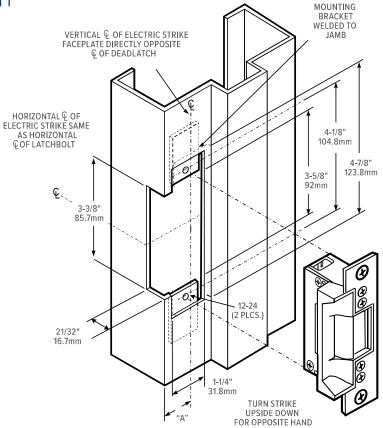

# 7270 Dimensions

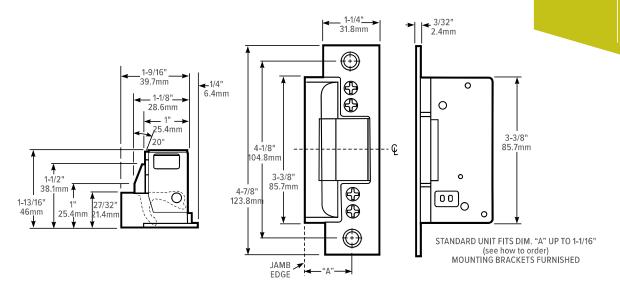

#### Installation in MOUNTING BRACKET (MOUNTING CLIP) WELDED Steel Jamb VERTICAL € OF DEADLATCH MOUNTING SCREWS IN SAME то јамв PLANE AS ELECTRIC STRIKE (OR PROVIDED) MOUNTING SCREWS æ 4-1/8' 104.8mm 4-7/8" 3.2mm 123.8mm 3-3/8" 85.7mm HORIZONTAL Q OF STRIKE SAME AS HORIZONTAL → **PRESSURE** SENSITIVE SPACER **C**OF LATCHBOLT Q Œ. Ø Ø Qέ 12-24 (2 PLCS.) 27/32" 21.4mm 1-1/4"



TURN STRIKE
UPSIDE DOWN
FOR OPPOSITE HAND













# UltraLine® 7400 Series

# Electric Strikes for Adams Rite Deadlatches, Cylindrical Locks

Designed for use with Adams Rite deadlatches or cylindrical locksets with 1/2" [12.7 mm] to 5/8" [15.9 mm] latchbolt projection. For use in aluminum, hollow metal, or wood applications.

Open electrically under 25 lbs [11.3 kg] of preload. Preload is pressure exerted on doors by air conditioning systems, warping or misaligned hardware which can disable common electric strikes.



This non-handed strike features an ultra-compact design and adjustable stainless steel keepers with over 1,500 lbs [680.4 kg] of holding force in fail secure mode. The strike releases electrically with up to 25 lbs of door preload. Single solenoid operates on 12/16/24 VDC power.

Remote electrical control of narrow stile aluminum doors equipped with an Adams Rite 4500, 4700 (discontinued), or 4900 Deadlatch or cylindrical lockset with 1/2" [12.7 mm] to 5/8" [15.9 mm] latchbolt projection. Electrical actuation unlocks the keeper, releasing the latchbolt so the door may be opened without operating the latch itself.

# Certifications

UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use UL 294 ULC-S319 ANSI/BHMA A156.18 ANSI/BHMA A156.31 Electric Strikes and Frame Mounted Actuators, Grade 1





7401

)







7440

# **Features**

#### Case

1-13/32" x 3-3/8" x 1-1/16" deep [35.7 mm x 85.7 mm x 27 mm deep]

#### Strike Lip

Basic 7400 strike has lip of proper length for 1-3/4" [44.5 mm] thick door that closes flush with jamb edge. Where door thickness or jamb shape differs from this standard relationship, lip extension kits are available.

Lip extension kits not available on 7401, 7431

#### **Strike Opening**

5/8" adjustable x 1-7/16" x 1/2" deep [15.9 mm adjustable x 36.5 mm x 12.7 mm deep]. Bolt retaining keeper is stainless steel. Strike accepts bolt of Adams Rite 4500, 4700 (discontinued), or 4900 Deadlatch or cylindrical locksets.

#### **Latchbolt Projection**

1/2" to 5/8" [12.7 mm to 15.9 mm]



**Electric** 

#### **Preload**

7400 Series Electric Strikes open electrically under 25 lbs [11.3 kg] of preload. Preload is pressure exerted on doors by air conditioning systems, warping or misaligned hardware which can disable common electric strikes.

Using jaw inserts of various sizes, the Ultraline 7400 Series electric strikes are adjustable to compensate for door and frame related preload and security problems.

#### **Faceplate**

Available in a variety of architectural finishes. Faceplates are also available sold separately.

7400	1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]	Flat with radius corners	
7401	1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]	Radiused to match nose on inactive leaf in a pair of narrow stile doors.	
7410	1-7/16" x 7-15/16" [36.5 mm x 201.6 mm]	Flat with radius corners	
7411	1-7/16" x 10-1/4" [36.5 mm x 260.4 mm]	Flat with radius corners	
7430	1-1/4" x 6-7/8" [31.8 mm x 174.6 mm]	Flat with radius corners	
7431	1-1/4" x 6-7/8" [31.8 mm x 174.6 mm]	Radiused to match nose on inactive leaf in a pair of narrow stile doors	
7440	1-1/4" x 4-7/8" [31.8 mm x 123.8 mm]	Flat with square corners	

7430/7431: Large 6-7/8" faceplate is designed to cover strike opening when converting from an MS® pivoted-bolt deadlock to deadlatch.

#### **Standard Package**

Individually boxed with mounting screws, mounting tabs, adhesive shims to accommodate jamb or stile extrusion thickness greater or less than nominal 1/8" [3.2 mm], an adjustable keeper shim pack and two plug-in voltage adapters for 12/24 VDC.

#### **Shipping Weight**

2 lbs [0.91 kg].

## Electrical

#### Voltage

Field selectable to match power source of 12/24 VDC. VA7400-16VDC voltage adapter required when using 16 VDC power, available separately. Equipped with a quick connect plug-in type connector.

#### **Current Draw**

.44 A at 12 VDC

.46 A at 16 VDC\*

.23 A at 24 VDC

\*Requires 16 DC adapter (P/N VA7400-16VDC)

#### Fail Safe | Fail Secure

Field selectable fail safe/fail secure

# **Options**

- Available with two Form 'C' monitoring switches to indicate when the latchbolt is engaged in the strike jaws and a locked/unlocked solenoid status.
- · Lip extension kits for various dimensions of door centerline to jamb edge; for flat faceplates only.

#### · Modular Packaging

Match one strike body kit with one faceplate kit to make a complete electric strike. Faceplate kits contain all hardware to mount electric strike. Please contact factory or sales representative for details.

#### • ELX-ElectroLynx® Adapter

Connects Adams Rite electrified products to ElectroLynx system.

#### • 16 VDC Adapter

VA7400-16VDC required when using 16 VDC Power

#### Wood Door Cover

WDC7400 for use when mounting the 7400 Series Electric Strike on the inactive leaf of a pair of doors. The cover simplifies the mortise prep.

# Related Products

#### 7400/7401, 7410/7411, 7430/7431, 7440


When purchasing this product, please consider the following related products, available separately:

DEADLATCHES	EXIT DEVICES	ACCESSORIES	POWER
4510, 4530, 4900, 4920AN Series Deadlatches	8300, 8400 Mortise Exit Device	Modular Kits, Lip Extension Kits, WDC7400-Wood Door Cover, Faceplate Kits	4603 Rectifier, 4605/4606 Transformer, Piezo Horn audible indicator, ElectroLynx connector, VA7400 Voltage Adapter




# 7400/7401 Dimensions




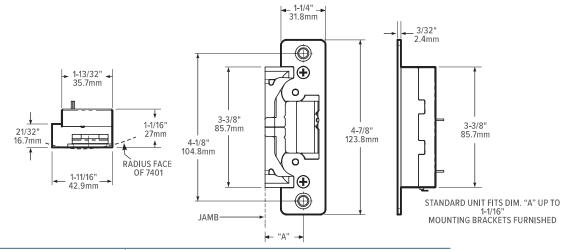

# Jamb Preparation

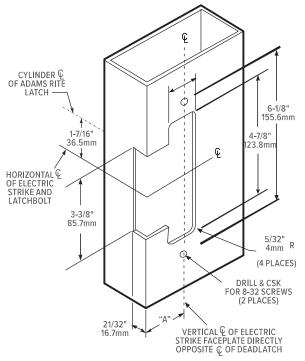

# Installation

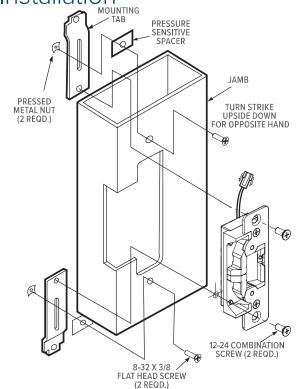


# How to Order


7400/7401 Electric Strikes: Specify quantity and the following information. Order related products separately.


MODEL	FACEPLATE SHAPE	FEATURES*	FINISH				
740	О	M	628		628		
	<b>0</b> Flat	- None	7400 OI	NLY	7401 ONLY		
	1 Radius	M Monitored	313 Dark Bronze Anodized	<b>626</b> Satin Chrome	119 To match 335 Black Anodized		
		A Modular Pack – Body Kit	335 Black Anodized	628 Clear Anodized	<b>121</b> To match 313 Dark Bronze Anodized		
			605 Bright Brass	<b>630</b> Satin Stainless	130 To match 628 Clear Anodized		
			606 Satin Brass				

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa.



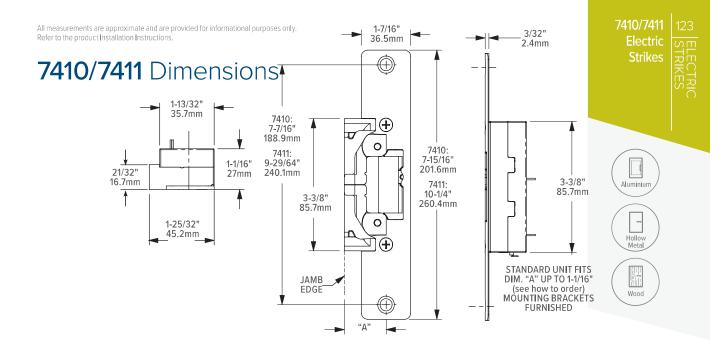

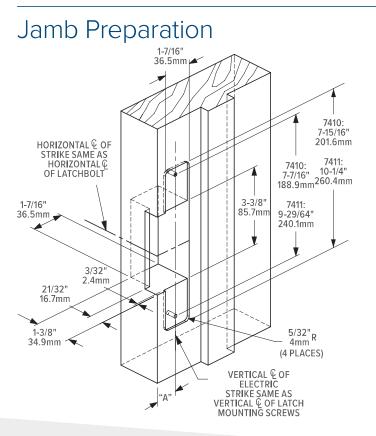

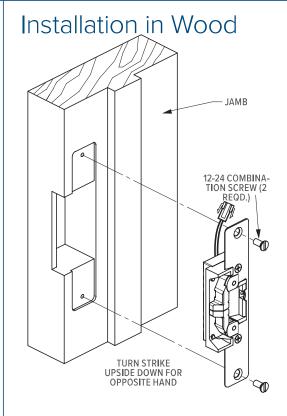

# How to Order

7410/7411 Electric Strikes: Specify quantity and the following information. Order related products separately.


MODEL	FACEPLATE LENGTH	FEATURES*	FINISH
741	0	-	628
	<b>0</b> 7-15/16"	- None	313 Dark Bronze Anodized
	<b>1</b> 10-1/4"	M Monitored	335 Black Anodized
			628 Clear Anodized
			630 Satin Stainless

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa.




All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.



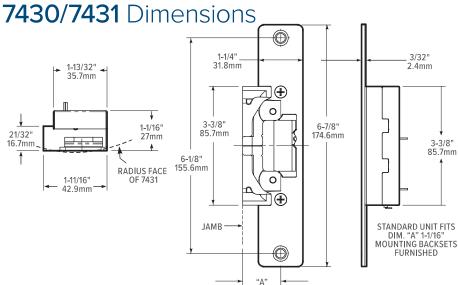

# Jamb Preparation 21/32" 16.7mm HORIZONTAL © OF CYLINDER (A-R 4500) SERIES DEADLATCH 1-7/16" 36.5mm HORIZONTAL © OF ELECTRIC STRIKE FACEPLATE DIRECTLY OPPOSITE © OF DEADLATCH DEADLATCH WERTICAL © OF ELECTRIC STRIKE FACEPLATE DIRECTLY OPPOSITE © OF DEADLATCH DRILL & CSK FOR 8-32 FLAT HEAD SCREWS (2 PLACES)

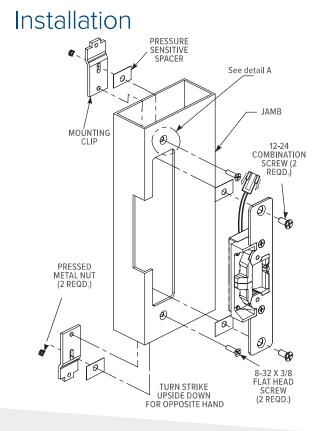


# How to Order


7430/7431 Electric Strikes: Specify quantity and the following information. Order related products separately.

MODEL	FACEPLATE SHAPE	FEATURES*	FIN	ISH
743	0	М	62	28
	0 Flat	- None	7430 ONLY	7431 ONLY
	1 Radius	M Monitored	313 Dark Bronze Anodized	119 To match 313 Dark Bronze Anodized
			335 Black Anodized	121 To match 335 Black Anodized
			628 Clear Anodized	119 To match 628 Clear Anodized


\*Fail-secure can be field converted to fail-safe or vice-versa.



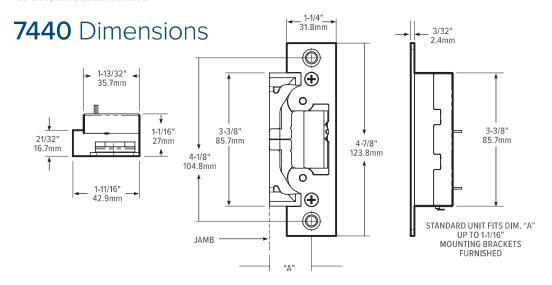




# Jamb Preparation in Steel

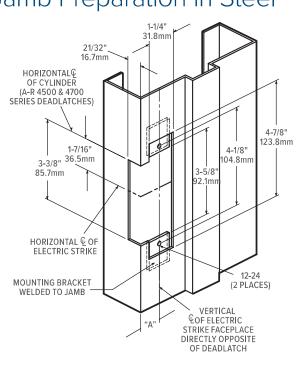

# Installation in Steel

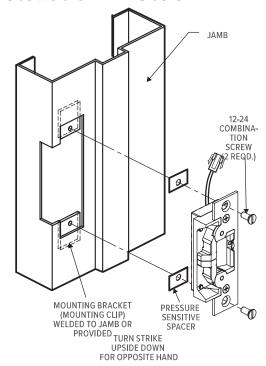

Installation in wood requires WDC7400. See Options & Accessories for more information.

# How to Order

7440 Electric Strike: Specify quantity and the following information. Order related products separately.

MODEL	FEATURES*	FINISH	
7440	M	62	28
	- None	313 Dark Bronze Anodized	628 Clear Anodized
	M Monitored	335 Black Anodized	629 Bright Stainless
		605 Bright Brass	630 Satin Stainless
		606 Satin Brass	

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa.















# UltraLine® 74R1, 74R2

# Electric Strikes for Rim Exit Devices with Pullman Type Latchbolts

**74R1 Electric Strike** is designed for rim exit devices with 3/4" [19.1 mm] Pullman latchbolts. For use in aluminum, hollow metal or wood applications.

**74R2 Electric Strike** is designed for narrow stile rim exit devices with 1/2" [12.7 mm] Pullman latchbolts. Designed for use in aluminum applications.

Open electrically under 25 lbs [11.3 kg] of preload. Preload is pressure exerted on doors by air conditioning systems, warping or misaligned hardware which can disable common electric strikes.

# **Function**

These non-handed strikes feature an ultra-compact design and adjustable stainless steel keepers with over 1,500 lbs [680.4 kg] of holding force in fail secure mode. The strikes release electrically with up to 25 lbs of door preload. Single solenoid operates on 12/16/24 VDC power. Provides electrical remote control, allowing door to open without actuation of the exit device.

# Certifications

UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

UL 294 ULC-S319

ANSI/BHMA A156.18

ANSI/BHMA A156.31 Electric Strikes and Frame Mounted Actuators, Grade 1

# Electrical

74R2

#### Voltage

Field selectable to match power source of 12/24 VDC. VA7400-16VDC voltage adapter required when using 16 VDC power, available separately. Equipped with a quick connect plug-in type connector.

74R1

#### **Current Draw**

.44A at 12 VDC

.46A at 16 VDC\*

.23A at 24 VDC

\*Requires 16 DC adapter (P/N VA7400-16VDC)

# **Features**

#### Case

**74R1**: 1-13/32" x 3-3/8" x 1-1/16" deep [35.7 mm x 85.7 mm x 27 mm deep]

**74R2**: 1-13/32" x 3-3/8" x 1-1/8" deep [35.7 mm x 85.7 mm x 28.6 mm deep]

#### **Strike Opening**

Bolt retaining keeper is stainless steel.

**74R1:** 5/8" x 1-7/16" x 9/16" deep [15.9 mm x 36.5 mm x 14.3 mm deep]. Strike accepts Pullman latch of exit devices without deadlocking bolts.

**74R2:** 5/8" x 1-7/16" x 1/2" deep [15.9 mm x 36.5 mm x 12.7 mm deep].

#### **Faceplate**

Not separate

**74R1:** 1-3/4" x 9 x 11/16" [44.5 mm x 228.6 mm x 17.5 mm]

**74R2:** 1-5/8" x 9 x 1/2" [41.3 mm x 228.6 mm x 12.7 mm]

#### **Latchbolt Projection**

**74R1:** 3/4" [19.1 mm] **74R2:** 1/2" [12.7 mm]

#### Standard Package

Individually boxed with mounting plate shims, mounting screws, and installation instructions.

#### **Shipping Weight**

2 lbs [0.91 kg].




Field selectable fail safe/fail secure

# **Options**

- Available with two Form 'C' monitoring switches to indicate when the latchbolt is engaged in the strike jaws and a locked/unlocked solenoid status.
- ELX-ElectroLynx® Adapter Connects Adams Rite electrified products to ElectroLynx system
- 16 VDC Adapter
  VA7400-16 VDC required when using 16 VDC power


# **74R1**Dimensions

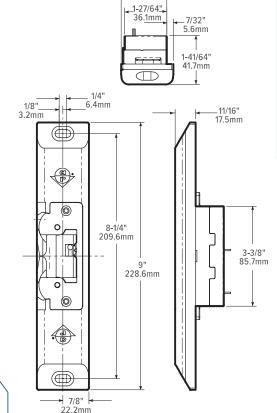


**∟1-17**/32"\_ 38.9mm



# Jamb Preparation

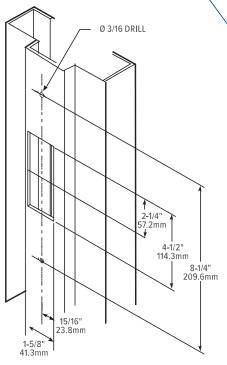


# Installation







# 74R2 Dimensions



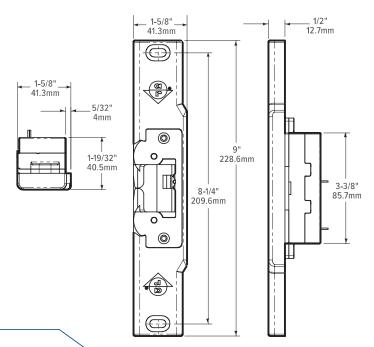

Jamb Preparation

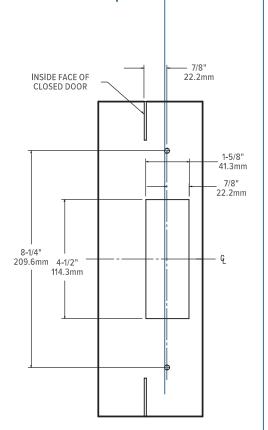

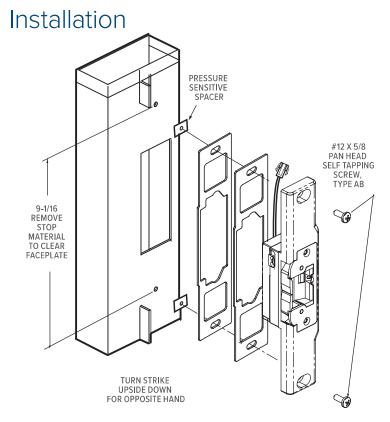



# How to Order & Related Products

74R1 Electric Strike: Specify quantity and the following information. Order related products separately.

MODEL	FEATURES*	FINISH
74R1	М	-130
	- None	119 To match 335 Black Anodized
	M Monitored 121 To match 313 Dark Bronze Anod	
		130 To match 628 Clear Anodized

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

EXIT DEVICES	POWER
P8800/P8700 Pullman Rim Exit Devices	4603 Rectifier, 4605/4606 Transformer, Piezo Horn audible indicator, ElectroLynx connector, VA7400-16VDC Adapter

# How to Order & Related Products

74R2 Electric Strike: Specify quantity and the following information. Order related products separately.

MODEL	FINISH
74R2	-130
	119 To match 335 Black Anodized
	121 To match 313 Dark Bronze Anodized
	130 To match 628 Clear Anodized

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa.

#### **RELATED**

When purchasing this product, please consider the following related products, available separately:

			-	
	PO	WER		
4603 Rectifier, 4605/460 connector, VA7400-16VD		zo Horn audible ind	licator, Elect	troLynx



# Aluminium











# 7800

# Electric Strike for Rim Exit Devices with Starwheel/ Interlocking Type Latchbolts

7800 Electric Strike is designed for use with Adams Rite rim exit devices with a Starwheel/Interlocking latchbolt (8700, 8800 Series, EX88). For use in aluminum, hollow metal or wood applications.

### **Function**

This non-handed, low-profile, surface mounted electric strike features an ultra-compact design and adjustable stainless steel keepers with over 1,500 lbs [680.4 kg] of holding force in fail secure mode. Internally mounted dual solenoid operates on 12 or 24 VDC power. Provides electrical remote control, allowing door to open without actuation of the exit device.

# Certifications

ANSI/BHMA A156.31, Grade 1

UL 1034 burglary-resistant listed and suitable for outdoor use

UL 294 listed

RoHS compliant

UL 305 Listed



# Features

#### **Strike Dimensions**

1-13/4" x 9" x 9/16" deep [44.5 mm x 229 mm x 14.2 mm deep]

#### **Strike Opening**

Bolt retaining keeper is stainless steel.

1" x 1-1/2" x 1/2" deep [24.4 mm x 38.1 mm x 12.7 mm deep].
Strike only accepts Starwheel/
Interlocking latching mechanism.

#### **Faceplate**

Not separate

1-3/4" x 9-1/64" x 9/16" [44.5 mm x 229 mm x 14.2 mm deep]

#### Compatibility

Accommodates Starwheel/ Interlocking latching mechanism of Adams Rite 8700, 8800, EX88 Series Rim Exit Devices.

#### Standard Package

Individually boxed with 1/16" and 1/8" spacer plates, mounting screws and installation instructions.

- Spacer Plates included to accommodate varying door gaps.
- Screws for wood applications not provided

#### **Shipping**

Weight approximately 2 lbs [0.91 kg].

# **Flectrical**

#### Voltage

Field selectable, dual voltage, 12 or 24 VDC.

#### **Current Draw**

0.45A at 12 VDC 0.25A at 24 VDC

#### Fail Safe | Fail Secure

Field selectable fail safe/fail secure

# Options & Accessories


- Ships standard with one 1/16" and 1/8" spacer plate. Units ordered in 613E, 628E, 630, & BSP finishes will be made of stainless steel to match. All other finishes will receive black stainless steel spacers. Additional spacer plates can be ordered separately.
- ELX-ElectroLynx® Adapter: Connects Adams Rite electrified products to ElectroLynx system




#### **Product Note**

Also available as HES 9800 Electric Strike

# **Dimensions**

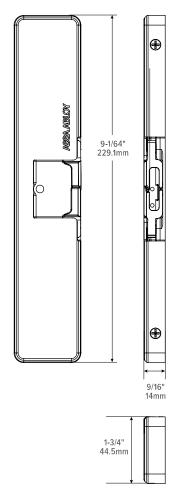

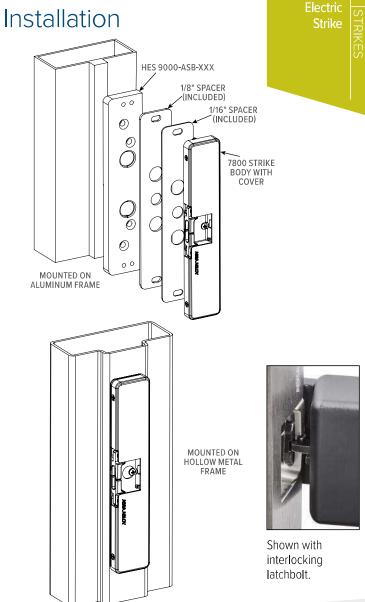

# How to Order & Related Products

7800 Electric Strike Specify quantity and the following information. Order related products separately.

MODEL	FINISH	
7800	<b>—</b> 630	
	605 Bright Brass	629 Bright Stainless
	606 Satin Brass	630 Satin Stainless
	613E Dark Oxidized Satin Broinze Powder	BSP Black Suede Powder
	628E Satin Aluminum Clear Anodized	

<sup>\*</sup>Fail-secure can be field converted to fail-safe or vice-versa.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

······································				
OPTIONS & ACCESSORIES	EXIT DEVICES	POWER		
7800-116-XXX 1/16" spacer plate, 7800-108-XXX 1/8" spacer plate, HES 9000-MTK Metal Template Kit*, HES 9000-ASB-XXX Aluminum Spacer Bracket*	8700, 8800 Series Rim Exit Devices	4603 Rectifier, 4605/4606 Transformer, Piezo Horn audible indicator, ElectroLynx connector, HES 2005M3 SMART Pac III*		

\*Available from ASSA ABLOY Electronic Security Hardware



# Options & Accessories

# Lip Extension Kits

#### 7100 Series Electric Strikes

Lip extensions are for center hung doors, thick doors, or other conditions that vary from the "standard" 1-3/4" thick door that closes flush (or near flush) with the jamb face. Specified with electric strike by the last dash number which varies the door centerline to jamb edge dimension in 1/8" increments. For existing 7100 Series Electric Strikes, a thin metal membrane in the standard lip can be drilled or punched out and the lip extension can be added in the field. The dash number for lip extension is the same as door centerline to jamb edge dash number on complete strike.

#### 7100 Lip Extension

LIP EXTENSION PART NUMBER	APPLICABLE ELECTRIC STRIKES
91-0171-01 through -13	7100, 7110, 7111, 7130, 7140
91-0172-01 through -13	7160, 7170

#### 7100 Lip Extension Dimensions

DASH PART NUMBER	DIMENSION 'A' — DOOR CENTERLINE TO JAMB EDGE
-00	1-1/16"
-01	1-1/2"
-02	1-5/8"
-03	1-3/4"
-04	1-7/8"
-05	2"
-06	2-1/8"
-07	2-1/4"
-08	2-3/8"
-09	2-1/2"
-10	2-5/8"
-11	2-3/4"
-12	2-7/8"
-13	3"

1-1/16" or less does not require a lip extension. Lip extensions for fire-rated 7200 Series


Electric Strikes must be factory installed.


#### Ultraline 7400 Series Electric Strikes


Lip extensions are for center hung doors, thick doors, or other conditions that vary from the "standard" 1-3/4" thick door that closes flush (or near flush) with the jamb face. Lip extension kits are available in 1/8" increments, for flat faceplates only.


#### 7400 Lip Extension

PART NUMBER	DIMENSION 'A' — DOOR CENTERLINE TO JAMB EDGE
LEK7400-50	1-3/8"
LEK7400-01	1-1/2"
LEK7400-02	1-1/16"
LEK7400-03	1-3/4"
LEK7400-04	1-7/8"
LEK7400-05	2"
LEK7400-06	2-1/8"
LEK7400-07	2-1/4"
LEK7400-08	2-3/8"
LEK7400-09	2-1/2"
LEK7400-10	2-5/8"
LEK7400-11	2-3/4"
LEK7400-12	2-7/8"
LEK7400-13	3"









# Faceplate Kits

For use with strike body. Faceplate kits contain all hardware to mount electric strike.

# 7100 Series Electric Strike Components

STRIKE BODY KITS					
7103A For use with 7100/7101, 7110/7111, 7130/7131, 7140					
7173A For use with 7160, 7170					
FACEPLATE KITS & FINISHES					
FPK00 For use with body kits: 7103A, 7173A					
FPK01 For use with body kit: 7103A					
FACEPLATE KITS & FINISHES					
FPK10 For use with body kit: 7103A					
FPK11 For use with body kits: 7103A					
FACEPLATE KITS & FINISHES					
FPK30 For use with body kit: 7103A					
FPK31 For use with body kits: 7103A					
FPK40 For use with body kit: 7103A, 7173A					
FPK45 For use with body kit: 7103A, for installing electric strike in previous prep, 4901, 4501 strike cover.					

# 7400 UltraLine® Electric Strike Components


	STRIKE BODY KITS					
7400A Standard body, for use in single door applications						
	7401A Radius body, for use in applications with pairs of doors					

FACEPLATE KITS & FINISHES
FPK7400 For use with body kit: 7400A
FPK7401 For use with body kit: 7401A
FPK7410 For use with body kit: 7400A
FPK7411 For use with body kit: 7400A, not available in 335 finish
FPK7430 For use with body kit: 7400A
FPK7431 For use with body kit: 7401A
FPK7440 For use with body kit: 7400A
FPK7445 For use with body kit: 7400A, not available in 335 finish. For installing electric strike in previous prep 4901, 4501, strike cover





For use with Ultraline 7400 Electric Strikes only, this cover plate is designed to simplify mortising of wood door pairs.




# **Monitor Switches**

If a visual or other signal is required to tell an operator what the electric strike is doing, a "monitoring" strike to switch that signal on and off is required.

This feature utilizes two sensor switches: one is activated by the latchbolt's penetration of the strike and the other by the mechanism that blocks the strike's release.

These switches can also be used to interconnect two strikes in "mantrap" or interlock situations, such as elevator doors. In these cases, power to the solenoid of each strike is controlled by the switch(es) of the other so one will not unlock unless the other is locked. Each switch has both normally open and normally closed leads to they can be wired to either make or break a circuit.

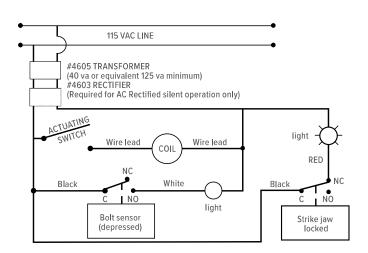

# Power

#### **4603** Rectifier

Converts low voltage AC current to DC of same voltage. Installs in low voltage line between transformer and strike. Full wave bridge type. Rated 2 amps (200 PIV).


#### 29-0218 Piezo Horn

Provides for audible indication of when a DC strike is energized. Operates with 12 VDC, 16 VDC, or 24 VDC strikes.

#### **Transformers**

- 4605 Converts 120 VAC to 12/24 VAC. Rated 40 Volt-amp output assures plenty of power for strike release.
- 4606 Converts 120 VAC current to 24 VAC. Plugs into standard wall outlet.



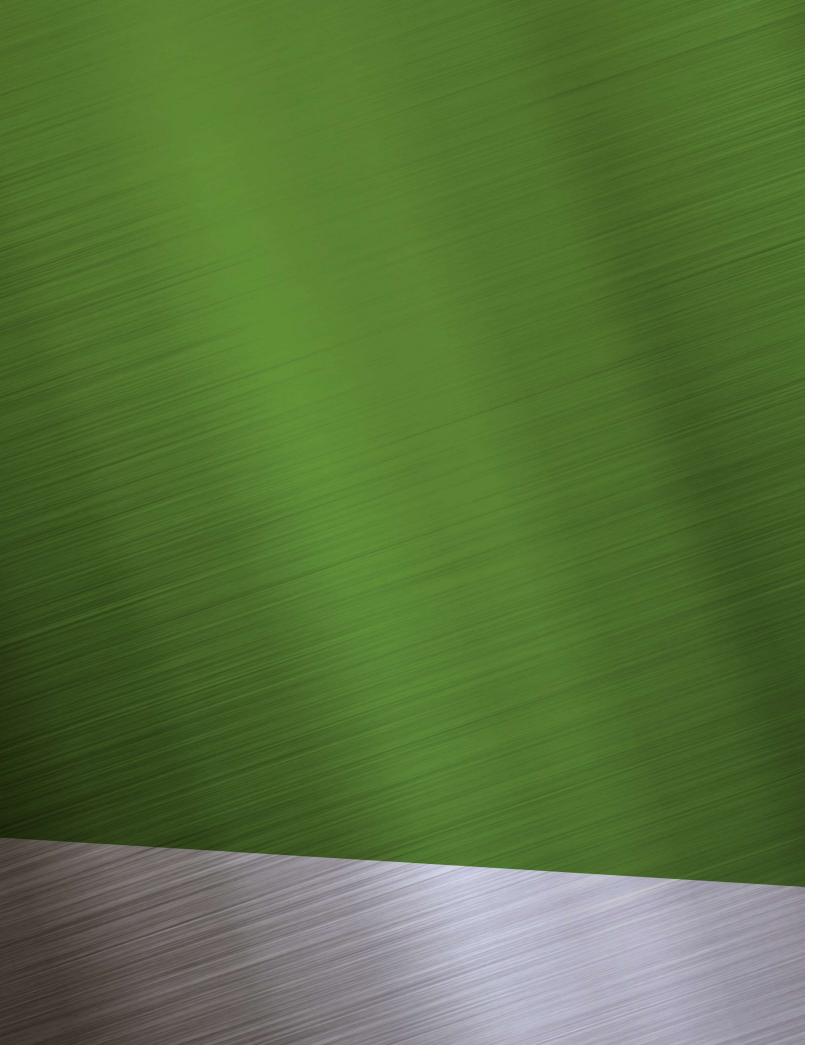







# 1000

# Series Turns

The 1000 Series Turns are designed to operate the Adams Rite MS1847 Deadlock and the 5017 Wood Door Deadlock.

## **Function**

1000 Turns are designed to operate Adams Rite MS\*1847
Deadlocks and 5017 Wood Door Deadlock. 1000-11 and 100021 have a rectangular escutcheon for mounting directly on door. 1000-01 and 1000-02 are without escutcheon, designed for easy push-nut mounting to door pull or other trim plate.



# **Features**

#### **Materials**

Turn Lever is zinc alloy. Escutcheon is stainless steel. Trim finish 130 Clear to match 628 Clear Anodized.

#### **Spindles**

Hardened steel, plated for corrosion resistance. First dash number in order guide indicates spindle parallel or perpendicular to turn lever (turn drawings below). Second dash number indicates spindle length "L" (see dash table on back).

#### Turn

**1004 Turn** has a longer, more ergonomically-friendly turn lever.

**1015 Turn** is available with 1016 Blank Plate for doors from 5/8" [15.9 mm] to 2-1/4" [57.2 mm] thickness. Without blank plate turn available (for use with cylinder pull) on doors from 7/16" [11.1 mm] to 2" [50.8 mm] thickness.

Standard finish 130 Clear to match 628 Clear Anodized. 1015 Turn for use with 5017 Wood Door Deadlock is specifically designed for wood door applications. 1016 Blank Plate available separately.

#### **Standard Package**

Individually packaged. The -11 and -21 are assembled with escutcheon. The -01 and -02 are unassembled, include turn, spindle, washer and push nut for assembly on the door pull plate.


#### **Shipping weight**


1/4 lb [0.11 kg].

# **Options**

 The availability of both perpendicular and parallel drives in these turns, coupled with the three hub drive positions of the MS1847 lock, provides several options.

- Choice of turn drive position relates directly to the particular lock hub drive position. Special care in specifying both the proper turn and lock in ordering is recommended.
- Chart below shows turn positions relative to lock hub positions.
   Broken line indicates direction of travel (45°) to retract bolt.







# How to Order & Compatible Products

1000 Series Turns: Specify quantity and the following information. Order related products separately.

MODEL	TURN TYPE			SP <b>I</b> NDLE LENGTH				тн	FINISH -130				
1000		-21			-21 -14								
	TURN WITHOUT ESCUTCHEON						Dash	Chart			119 To match 335 Black Anodized		
		Furnished	Unassen	ibled	No.	"L"	mm	No.	"L"	mm			
	<b>(</b>		$\Theta$		-11	17/32	13	-22	1-15/64	31	424 Tarrestale 242 Davids Durana Arradian d		
	\\P\	-01	187	-02 Pendicular Drive	-12	39/64	15	-23	1-19/64	33	121 To match 313 Dark Bronze Anodized		
	l V	Parallel Drive	l V		-13	43/64	17	-24	1-23/64	35	130 To match 628 Clear Anodized		
					-14	47/64	19	-25	1-27/64	36	130 To mater 920 Great Anodized		
		TURN WITH ESCUTCHEON			-15	51/64	20	-26	1-31/64	38			
		Furnished	hed Assembled			55/64	22	-27	1-33/64	39			
	•		_				-17	59/64	23	-28	1-39/64	41	
	<b>(1(1)</b>	-11	<del>(</del>	-21	-18	63/64	25	-29	1-43/64	42			
	$\perp$ $\vee$	Parallel Drive	V	Pendicular Drive	<b>-19</b> 1-3/64 26 <b>-30</b> 1-47/64 44								
u	u		u		-20	1-7/64	28	-31	1-51/64	46			
					-21	1-11/64	30	-32	1-55/64	47			

#### **COMPATIBLE PRODUCTS**

DEA	LOCKS		
MS1847 Deadlock	5017 Wood Door Deadlock		













# 3080

# Series Entry Trim

The 3080 Series Entry Trim provides outside activation for doors with any type of Adams Rite exit device and deadlatch. The locked handle is protected from vandalism and forced entry with a breakaway clutching mechanism.

## **Function**

The 3080 Series provides outside activation of doors that have any type of Adams Rite exit device or deadlatch. Breakaway clutching mechanism protects the locked handle from vandalism or forced entry, in either direction. All models share the same core components, so levers can be changed without having to replace the entire trim.

The 3080E Electrified Entry Trim is a continuous duty solenoid operated device that will allow the lever handle to be turned to unlatch the exit device when power is applied. When there is no power input, the handle is locked in place and the exit device remains latched. This electrified entry trim works with a card reader, keypad or a push button and is designed for entry door, stairwell and fire door applications.



# **Features**

#### Handle

The 3080-01, -02, and -03 levers are designed to return within 1/2" [12.7 mm] of the door face. The designer levers in this series do not have this same feature. Please verify local code requirements to ensure compliance.

#### **Mortise Cylinder**

May be ordered with or without a hole for standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter cylinder with MS® Cam, available separately. See Cylinders & Accessories section for more cylinder information.

#### Standard Package

Individually boxed with mounting hardware.

#### **Shipping weight**


3 lbs [1.36 kg].

# **Options**

- Can be ordered with or without a hole for cylinder. Order standard mortise cylinder with MS® cam separately.
- Tactile strip available as a kitted option for standard levers 01 and 03. Order Tactile Strip Kit 91-0118 separately.
- Order 4603 Rectifier, 4605/4606 Transformer separately.
- Available in choice of US3 (605)
   Bright brass, US4 (606) Satin brass, 10B powder coat to match dark bronze, US32 (629) Bright stainless, or US32D (630) Satin stainless.

#### **Product Note**

Adams Rite recommends that for optimal security the 3080 and 3080E Series Entry Trim is used in conjunction with Medeco high security cylinders, when a cylinder is required by the application.






# Options & Accessories

OPTION	DESCRIPTION
Standard Series 01	Standard lever, curved
Standard Series 02	Standard lever, round
Standard Series 03	Standard lever, square
Aventura Series ME	Studio Collection designer lever
Aventura Series MG	Studio Collection designer lever
Aventura Series MI	Studio Collection designer lever
Aventura Series MW	Studio Collection designer lever
Centro Series MD	Studio Collection designer lever
Centro Series MJ	Studio Collection designer lever
Odeon Series MN	Studio Collection designer lever
Odeon Series MV	Studio Collection designer lever

# 3000 Fixed Pulls


3001, 3002 Fixed Pulls: US32D (630) Satin Stainless Steel pulls have 2-3/4" x 11-1/2" [69.9 mm x 292.1 mm] escutcheon. Order with or without cylinder holes. For hollow metal and wood doors only.



Door prep and installation will differ depending

ASSA ABLOY


# Door Preparation & Trim Installation

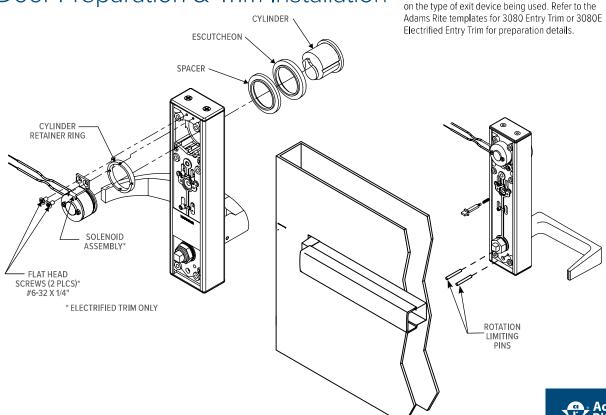



## Lever Dimensions


- \* The 3080-01, -02, and -03 lever handles are designed to return within 1/2" of the door face. Handles in the Designer Series do not have this same feature. Please verify with local code requirements to ensure compliance.
- \*\* Handed

























#### Odeon







# How to Order, Related, & Compatible Products

3080 Series Entry Trim: Specify quantity and the following information. Order related products separately.

MODEL	ELECTRIFIED	H	HANDLE	HANDING*	CYLINDER HOLE	EXIT DEVICE	VOLTAGE	FEATURES	TRIM COVER FINISH	FINISH
3080	Е		-01	-0	-3	7	-3	0	М	US32D
	<b>(blank)</b> Standard	STAND	ARD HANDLES	<b>0</b> No Handing	3 With Hole	1 SVR	Electrified Trim Only	Electrified Trim Only	- Standard (Black)	US3 Bright Brass
	E Electrified Trim	01 Curve	9	<b>7</b> RHR	9 Without Hole	3 Mortise	3 12 Volt DC	<b>0</b> Fail-Secure	<b>M</b> Matching Finish	<b>US4</b> Satin Brass
		<b>02</b> Rour	ıd	8 LHR		4 SCVR	<b>5</b> 24 Volt DC	<b>5</b> Fail-Safe		10B to match Dark Bronze
		<b>03</b> Squa	re			6 CVR				US32 Bright Stainless
		DESIGN	IER SERIES			<b>7</b> Rim				US32D Satin Stainless
		MD	MJ			<b>U</b> Universal Kit				
		ME	MN* (Handed)							
		MG	MV* (Handed)							
		МІ	MW							

<sup>\*</sup>Handing must be specified for MN and MV Designer Levers.

3000 Fixed Pulls: Specify quantity and the following information. Order related products separately.

MODEL	HANDLE	CYLINDER HOLE	EXIT DEVICE	FINISH
300	1	-1	1	-US32D
	1 Round	1 Without Hole	1 Mortise, Rim	US32D Satin Stainless
	2 Flat	2 With Hole	2 CVR	
			3 SVR	

NOTE: 3000 is not for use with the following narrow stile exit devices: 8200 SVR, 8400 Morstise, 8600 CVR, 8800 Rim

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

CYLINDERS	POWER
Standard 1" to 1-1/4" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder	4605, 4606 Transformer, 4603 Rectifier, 4612 Power Transfer Device

#### **COMPATIBLE PRODUCTS**

DEADLATCHES	EXIT DEVICES
4900, 4920AN Series Deadlatches, 4781 Two Point Deadlatch with paddle	8100, 8200 SVR, 8300, 8400 Mortise, 8500, 8600 CVR, 8700, 8800 Rim, 8900 SCVR Exit Devices



# 3090-150









# eForce® 3090-15

# **Keyless Entry**

A battery-operated keyless entry control device, the eForce 3090-150 Keyless Entry provides access control for Adams Rite deadlocks, deadlatches, and exit devices.

## **Function**

The eForce 3090-150 Keyless Entry is a battery-operated keyless entry control for Adams Rite deadlocks, deadlatches and exit devices, that is compatible with aluminum and hollow metal door applications. The device can accommodate up to 150 users, including master, supervisor, emergency users plus two one-time codes. The eForce 3090-150 can operate in three modes: Standard, Passage, and Lockout. All programming is accomplished via the keypad. Device operation is confirmed by both a visual LED light indicator and an audible sound generated by a Piezo horn.

# Operation

In the standard mode of operation, a programmed 2 to 7-digit character followed by a star (\*) key allows for one entry when used with Adams Rite deadlatches or exit devices. When an authorized code is entered, rotate lever downward 90° to unlock or unlatch locking device. When released, lever returns to horizontal. The MS Deadlocks must always be relocked manually when used with the eForce 3090-150. Hold open time is adjustable from 1 to 9 seconds. eForce 3090-150 accepts any standard mortise cylinder with MS\* cam, available separately.

# Certifications

FCC Part 15 compliant

# **Features**

- · Surface mounted with concealed fasteners. Suitable for 1-3/4" [44.5 mm] to 2-1/4" [57.2 mm] door thickness
- · Non-handed with clutched lever protection
- · Powered by 4 AA alkaline batteries; supports 60,000 activations

#### Housing

Measures 1-3/4" [44.5 mm] wide x 15-3/8" [390.5 mm] high.

#### Handle

Clutch-protected cast zinc alloy, finished to match housing, field selectable handing.

#### Kevpad

UV stable keypad material.

#### **Operating Temperatures**

Full outdoor rating; Temperature range from -31 to +151F [-35 to +66C] and 5 to 95% humidity (non-condensing).

#### Standard Package

Individually boxed with mounting hardware for 1-3/4" [44.5 mm] to 2-1/4" [57.2 mm] door thickness.

#### **Shipping weight**

5-1/2 lbs [2.49 kg].

# **Options**

- · Remote activation input cable RSK-3090 available separately.
- Available in choice of powder coat 121 Dark Bronze to match 313 Dark Bronze Anodized, or US26D (626) Satin Chrome.



Lock & Cylinder Installation

#### How to Order, Related, & Compatible Products

3090-150 eForce\* Keyless Entry: Specify quantity and the following information. Order related products separately.

MODEL	COMPATIBLE PRODUCTS	FINISH
3090	-01	-626
	01 Adams Rite latches or 8000 Series Exit Devices	<b>121</b> To match 313 Dark Bronze Anodized
	02 Adams Rite MS® deadlocks	<b>626</b> Satin Chrome

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

l	CYLINDERS	ACCESSORIES
	Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder	RSK-3090 Remote Activation Kit

DEADLOCKS	DEADLATCHES	EXIT DEVICES
MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1950, MS1950-050 Series Deadlocks	4510, 4530, 4900, 4920AN Series Deadlatches	8100, 8200 SVR, 8300, 8400 Mortise, 8500, 8600 CVR, 8700, 8800 Rim, 8900 SCVR Exit Devices with 31/32" backset or greater.  Corbin Russwin ED4000 Series. Please check model number for availability.









## 4550 MS®

#### Deadlock Lever

The 4550 MS® Deadlock Lever easily unlocks an MS® Deadlock with approximately three pounds of downward force. The spring-loaded lever relocks with an upward motion.

#### **Function**

Easy unlocking of most MS Deadlocks by approximately 3 lbs [1.36 kg] downward force on a 3" [76.2 mm] lever. Lever is spring loaded to horizontal, relocks with upward motion. Indicator signals lock status. Can be installed in place of existing key cylinder or cylinder type thumbturn on inside of door. 4550 Deadlock Lever not compatible with 7/8" [22.2 mm] backset locks.

#### Operation

Rotate lever downward 90° to unlock. When released, lever returns to horizontal. Rotate lever upward 90° to relock. Key operation from outside is not affected. Clutching action prevents damage to internal components.



#### Features

#### Housing

Aluminum casting is 1-3/8" wide x 7-1/2" long x 1" deep [34.9 mm x 190.5 mm x 25.4 mm].

#### Leve

3" [76.2 mm] long aluminum with end-return design offers comfortable grip to lock or unlock.

#### Indicator

Words "LOCKED" in red letters or "OPEN" in green letters appear on white background when bolt is thrown or retracted respectively. Indicator is driven by lock bolt itself.

#### **Stop Clearance**

Lever housing projects 11/16" [17.5 mm] forward of cylinder backset centerline. Depending on height of door stop and width of door/jamb gap, it may be necessary to modify the stop to clear the housing. For fin type stops, this is easily accomplished. Hollow stops may preclude use

of lever. Please contact factory for more detailed information.

#### **Compatible Locking Devices**

Any MS® pivoted bolt deadlock including "Schoolhouse" versions can be fitted with the 4550 including MS1850S, MS1950.

Derivative units such as 1870 or 1870HM, flushbolts that bolt into threshold are also operable by the 4550 lever.

Not compatible with MS+1890 Deadlock/Deadlatch or 2190 Interconnected Deadlock/Deadlatch or with 7/8" [22.2 mm] backset locks.

#### **Standard Package**

Individually boxed with mounting hardware and drive pins for both single point and threshold bolt-equipped locks.


#### Shipping weight

3 lbs [1.36 kg].

#### **Options**

- Available in choice of powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, and 130 to match 628 Clear anodized.
- Ordered for left or right hand door, but is easily reconfigured in the field to accommodate either door swing.



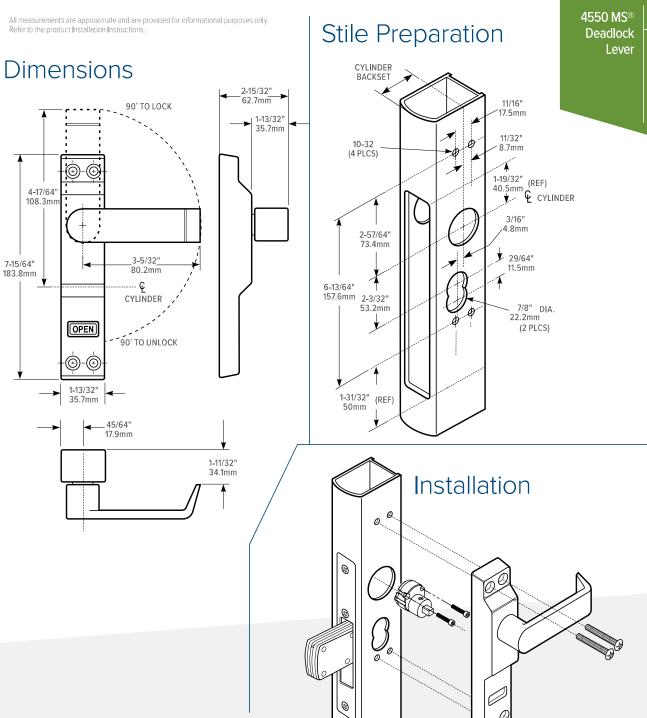

#### How to Order & Compatible Products

4550 MS\* Deadlock Lever: Specify quantity and the following information. Order related products separately.

MODEL	DOOR HAND	DOOR THICKNESS	FINISH
4550	R -01		-130
	R RH or RHR	<b>01</b> 1-3/4" to 2"	119 To match 335 Black Andodized
L LH or LHR			<b>121</b> To match 313 Dark Bronze Anodized
			130 To match 628 Clear Anodized

DEADLOCKS	FLUSHLOCKS
MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1950, MS1950-050 Series Deadlocks (not compatible with 7/8" backset)	1870, 1870HM Series cylinder-operated flushbolts



## Aluminium



## 4560 Series

#### Deadlatch Handles

The 4560 Series Deadlatch Handles easily unlock the 4300, 4500 and 4900 Series Deadlatches. These handles fit solidly into the cylinder hole of Adams Rite deadlatches.

#### **Function**

Designed to operate 4300, 4500 and 4900 Series Deadlatches by a natural downward hand movement, these handles incorporate an activator cam plug that mounts on the handles' escutcheon and fits solidly into the cylinder hole of the latch. Not intended for use as a door pull.

4560 handles feature an ADA compliant lever shaped to fit the hand.

4565 handles feature a thumbturn of minimum practical length.

4568 handles feature an ADA compliant lever shaped to fit the hand.

**4569** handles feature a return end, often required by code.



#### **Features**

#### Handle

Handle of cast aluminum.

**4560:** ADA compliant lever is shaped to fit the hand, with a concave thumb-rest portion that tends to keep knuckles and thumb safely away from the jamb, even on a short backset narrow stile.

**4565:** Thumbturn of minimum practical length is designed to offer a firm grip to the fingertips. Ideal for doors where the latch is operated infrequently.

European styling of 4568 and 4569 offers a generous hand grip with shank offset from the narrow stile jamb for hand safety. Rugged construction ensures dependable performance, with a high-wear spring to return the handle to position after use.

**4568:** ADA compliant lever is shaped to fit the hand.

**4569:** ADA compliant lever features a return end, often required by code. Please verify local code requirements to ensure compliance.

#### **Escutcheon**

A 1/4" [6.4 mm] square heat-treated spindle is part of escutcheon assembly, which interlocks with the cam plug. Finished to match lever.

**4560, 4565** use the same sloping 1-3/8" x 4" [34.9 mm x 101.6 mm] escutcheon, designed to match the clean lines of a narrow stile door.

**4568**, **4569** use the same 1-3/8" x 4" [34.9mm x 101.6mm] escutcheon, designed to match the clean lines of a narrow stile door. Steel mounted base is secured by hidden screws and has two large helical compression springs (one becomes a "spare" once handing is given).

#### Cam Plug

Secured in latch body by cylinder set screw, the plug is also rigidly tied to handle escutcheon by hardened steel pins. Handing can be reversed by removing a spring clip, reversing the cam, and replacing the clip.

#### Standard Package

Individually packaged with mounting hardware and cam plug handed LH or RH as specified.

#### **Shipping Weight**

2 lbs [0.91 kg].

**4560**, **4565** are also available bulk-packed in cartons, up to 100 per carton. Please contact factory for more information.


#### **Options**

- Ordered for left hand (LH) or right hand (RH) door, but is easily reconfigured in the field to accommodate either door swing.
- Standard handles are for 1-3/4"
  [44.5 mm] thick doors.


  Please contact factory for doors up to 3-1/4" [82.6 mm] available by special order.
- Available in choice of powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, and 130 to match 628 Clear anodized.




#### **Dimensions**

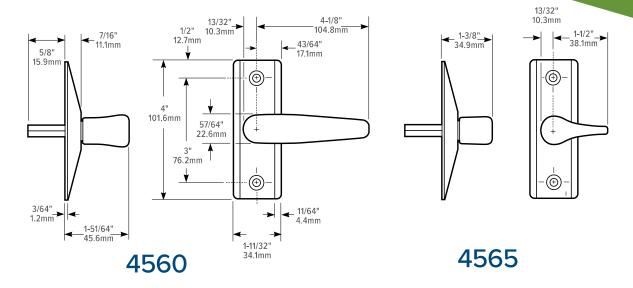

#### Narrow Stile Preparation

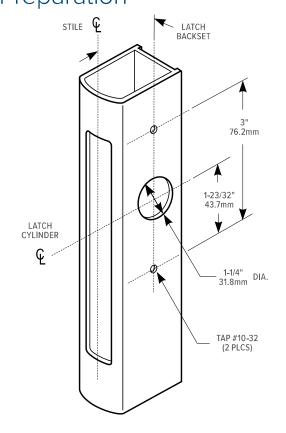

#### Installation

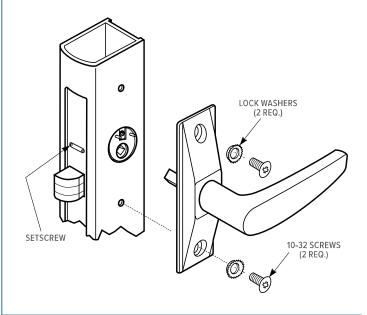




#### **REVERSIBLE 4580 CAM DISC**


Included with 4560 Series Deadlatch Handles.


Required to operate 4500 / 4900 / existing 4700 series latches.




All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.

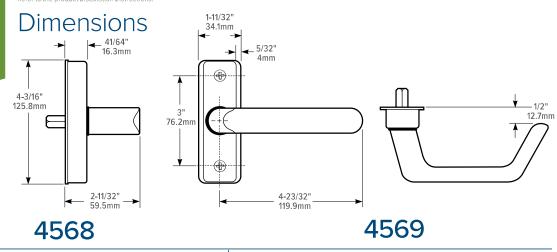

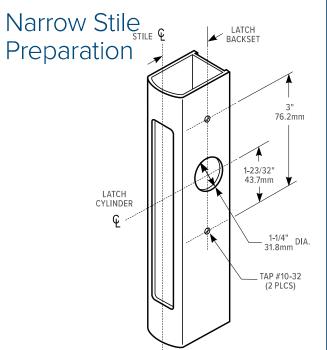

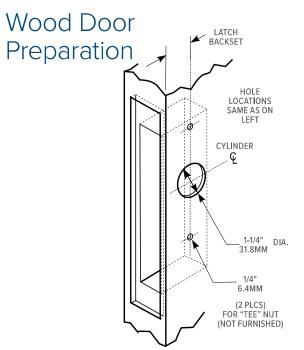

#### Installation

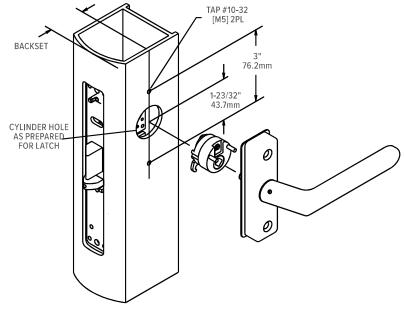



**US** adamsrite.com | 800.626.7590 | customerservice.adamsrite@assaabloy.com **Canada** assaabloydss.ca | 800.461.3007 | sales.dss.ca@assaabloy.com

#### How to Order & Compatible Products

**4560**, **4565** Deadlatch Handles: Specify quantity and the following information. Order related products separately.

MODEL	HANDLE TYPE	HANDING	DOOR THICKNESS	FINISH
456	0	-5	01	-130
	0 Lever	<b>0</b> Using MS+1890	For 4300, 4500, 4900 Series Deadlatches	119 To match 335 Black Anodized
	5 Turn	5 LH or LHR	<b>01</b> 1-3/4" to 2"	<b>121</b> To match 313 Dark Bronze Anodized
		6 RH or RHR	<b>02</b> 2-1/4" to 2-1/2"	130 To match 628 Clear Anodized
			<b>03</b> 2-3/4" to 3"	
			04 3-1/4"	
			For MS+1890	
			<b>11</b> 1-3/4"	
			<b>12</b> 1-3/4" to 2-1/4"	
			<b>13</b> 2-5/16" to 2-3/4"	

4568, 4569 Deadlatch Handles: Specify quantity and the following information. Order related products separately.

MODEL	LEVER TYPE	HANDING	DOOR THICKNESS	FINISH
456	8	-5	01	-130
	8 Straight	<b>0</b> Using MS+1890	For 4300, 4500, 4900 Series Deadlatches	119 To match 335 Black Anodized
	9 Return End	5 LH or LHR	<b>01</b> 1-3/4" to 2"	121 To match 313 Dark Bronze Anodized
		6 RH or RHR	<b>02</b> 2-1/4" to 2-1/2"	130 To match 628 Clear Anodized
			<b>03</b> 2-3/4" to 3"	
			04 3-1/4"	
			For MS+1890	
			<b>11</b> 1-3/4" to 1-15/16"	
			<b>12</b> 2" to 2-1/4"	
			<b>13</b> 2-5/16" to 2-3/4"	
			14 3"	

#### **COMPATIBLE PRODUCTS**

DEADLOCKS	DEADLATCHES
MS+1890 Deadlock/Latch	4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN Series Deadlatches.
2190 Series Interconnected Deadbolt/Deadlatch (4568, 4569 only)	

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:











## 4570 ICU

#### **Latch Operator**

The 4570 ICU Latch Operator specifically addresses the easy access needed for sliding doors in hospital ICU wards. This device meets code requirements for self-latching door mechanisms on ICU doors.

#### **Function**

Created to specifically address the easy access needed for sliding doors in hospital ICU wards. This device meets code requirements for self-latching door mechanisms on ICU doors, when used in conjunction with the Adams Rite 5017 Deadlock/Latch or the MS1847 Deadlock/Latch.

#### Operation

A pair of ergonomically—designed handles activate an Adams Rite hookbolt deadlatch from either side of the door. The 4570 ICU Latch Operator utilizes the Adams Rite 5017 Deadlock/Latch or MS1847 Deadlock/Latch (available separately). Doors can be opened swiftly and easily with one natural motion. The 4570 ICU Latch Operator is known for durability and strength-in-small-packages.



#### **Features**

#### Handle

The handles are positioned parallel with the stile to provide faster latching and unlatching of the door. Rugged construction ensures dependable performance, with a high-wear spring to return the handles to their position after use.

#### **Escutcheon**

1" x 4" x 1/2" escutcheon, designed to match the clean lines of a narrow stile door.

#### Standard Package

Individually boxed with mounting hardware.

#### **Shipping Weight**


1-1/2 lb

#### **Options**


 Lever handles and escutcheon available in 130 Satin Aluminum, 121 Dark Bronze or 119 Black finishes.



#### **Dimensions**



#### Installation

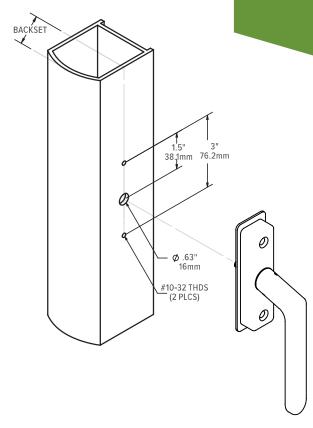

#### How to Order & Compatible Products

**4570 ICU Latch Operator:** Specify quantity and the following information. Order related products separately.

MODEL	FINISH	
4570-01	-130	
	119 To match 335 Black Anodized	
	121 To match 313 Dark Bronze Anodized	
	130 To match 628 Clear Anodized	

#### **COMPATIBLE PRODUCTS**

This product is compatible with the following products.

· '	J 1
DEADLOCKS	
5017 Deadlock/Deadlatch, self-latching only	
MS1847 Deadlock/Deadlatch, self-latching only	



## 4576 Flushbolt

#### with ICU Lever





The 4576 Flushbolt with ICU Lever specifically addresses the easy access needed for swinging doors in hospital ICU wards. The device latches to header allowing both paired out-swinging narrow stile door leaves to remain active.

#### **Function**

Designed for use instead of conventional flip-lever operated flushbolts, the 4576 Flushbolt with Lever latches to the header allowing both door leaves to be "active". There is no need to pin one door with cylinder operated flushbolts or other devices. The lever is a modified version of the ergonomically-designed 4570 Latch Operator and the concealed vertical rod mechanism is similar to the one used in Adams Rite's 4781 Two-Point Deadlatch with Paddle. Note, however, that the 4576 Flushbolt with Lever is not intended to substitute for an exit device, which must have a door-spanning bar.

#### Operation

The ergonomically-designed handle activates the U-shaped top bolt, which wraps around the strike post to deadlock position. This flushbolt can be operated from the out-swing side only.



#### **Features**

#### **Header Strike**

A flanged post installed on the header has generous location adjustment to allow for door misalignment, sag, bumpers, etc. Designed to prevent forced entry by bowing the door.

#### Handle

The handle is positioned parallel with the stile to provide faster latching and unlatching of the door. Doors can be opened swiftly and easily with one natural motion. Rugged construction ensures dependable performance, with a high-wear spring to return the handle to position after use.

#### **Escutcheon**

1" x 4" x 1/2" escutcheon, designed to match the clean lines of a narrow stile door.

#### **Door Size**

Standard unit will fit doors up to 66" above the handle height (110" door if handle is at max 44" height). For taller

doors, order 8655 Tall Door Kit, which allows up to 97" above handle.

#### Standard Package

Individually boxed with mounting hardware.

#### **Shipping Weight**


4 lb.

#### **Options**

 Lever handles and escutcheon available in 130 Satin Aluminum.
 Unit must be specified left hand (LH) or right hand (RH).




#### **Dimensions**

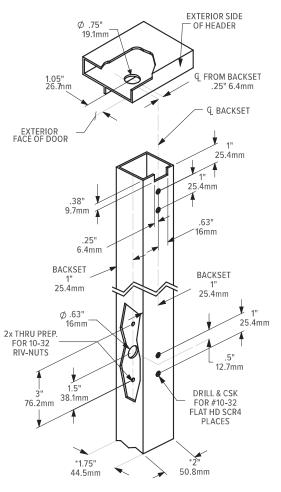

\* Preparation and installation of 4576 devices are based on 1.75" x 2" stile external dimensions. Doors with a thickness other than 1.75" will require modification to the 4576 device.

#### Installation

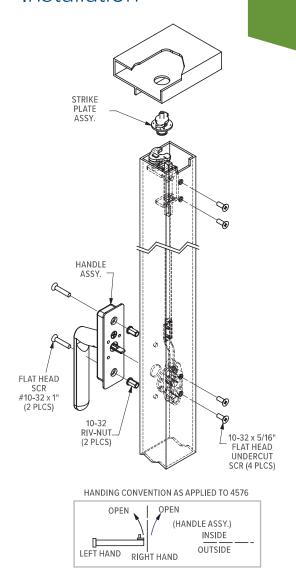

#### How to Order & Compatible Products

4576 ICU Latch Operator: Specify quantity and the following information. Order related products separately.

MODEL	HANDING	FINISH
4576	-601	-130
	<b>501</b> Left Hand	130 To match 628 Clear Anodized
	601 Right Hand	

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately.

	ACCESSORIES
8655 Tall Door Kit	









## 4590

#### Deadlatch Paddle

The 4590 Deadlatch Paddle is an ergonomicallyfriendly alternative to a knob or lever handle. Operate with a simple push or pull.

#### **Function**

An alternative to knob or lever handles. Makes opening a latched door as natural as opening an unlatched one — just push or pull in the direction in which the door swings. Compatible with any Adams Rite 4300, 4500 or 4900 Series Deadlatch, MS+1890 Deadlock/ Deadlatch, or 2190/2290 Interconnected Deadbolt/ Deadlatch.

#### Operation

Available in four configurations: push left, push right, pull left, and pull right.



#### **Features**

#### **Paddle**

Extruded aluminum.

#### **Escutcheons**

Zinc alloy with black finish.
Secured to door stile with special binder posts that extend into the escutcheon to rigidly resist torque loads in any direction.

#### **Cam Plug**

Furnished for use with 4300, 4500 and 4900 Series Deadlatches.

Cam plug not for use with MS+1890 Deadlock/Deadlatch or 2190/2290 Interconnected Deadbolt/ Deadlatch. Secured in latch body by cylinder set screw, plug is also rigidly tied to escutcheon by hardened steel pins.

#### **Standard Package**

Individually boxed with mounting hardware. Units for 4300, 4500 or 4900 Series Deadlatches include cam plug.

#### **Shipping weight**

1-1/2 lb [0.68 kg].


#### **Options**

- First dash number specifies operation, handing and compatible latch. If required, use second dash number to specify nonstandard units for doors thicker than 1-3/4" [44.5 mm]. Please see configuration table or contact factory for more information.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.




#### Stile Preparation

For 4500/4900 latches, see MS+1890/2190 for different hole pattern



Installation

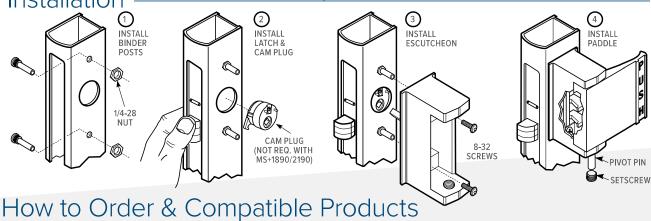

4590 Deadlatch Paddle: Specify quantity and the following information. Order related products separately.

MODEL		OPEF	RATION		DOOR TH	CKNESS	FINISH*
4590	02				-O	0	-313
	FIRST DASH FOR LATCH SERIES	OPPERATION	l	USE	For 4300, 4500, 4900 Series Deadlatches	For MS+1890, 2190	313 Dark Bronze Anodized
	<b>-01</b> 4300/4500/4900	PULL	P	Outside of left hand reverse	00 1-3/4"	00 1-3/4"	335 Black Anodized
	<b>-11</b> MS+1890/2190	TO LEFT	ե	door or inside of right hand	<b>01</b> 1-13/16" to 2"	<b>01</b> 1-3/4" to 2-1/4"	628 Clear Anodized
	<b>-02</b> 4300/4500/4900	PUSH	P	Outside of left hand door or	<b>02</b> 2-1/4" to 2-1/2"	<b>02</b> 2-5/16" to 2-1/2"	
	-12 MS+1890/2190	TO LEFT	U S H	inside of right hand reverse	<b>03</b> 2-3/4" to 3"	<b>03</b> 2-9/16" to 2-3/4"	
	-03 4300/4500/4900	PULL	Р	Outside of right hand reverse	04 3-1/4"		
	-13 MS+1890/2190	TO RIGHT	L	door or inside or left hand			
	<b>-04</b> 4300/4500/4900	PUSH	<b>₽</b>	Outside of right hand door or			
	-14 MS+1890/2190 TO RIGHT		S H	inside of left hand reverse			
	LH		RH	-01 OR -11			
	-04 OR -14 LHR		RHR	-02 OR -12 -03 OR -13			

<sup>\*</sup>Finish applied to paddle assembly only, not escutcheon.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately.

ACCESSORIES
91-0912 Adapter Plate

DEADLOCKS	DEADLATCHES
MS+1890 Deadlock/Latch, 2190 Series Interconnected Deadbolt/Deadlatch	4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN Series Deadlatches.









#### Deadlatch Paddle

The 4591 Deadlatch Paddle is an ergonomicallyfriendly alternative to a knob or lever handle. Operate with a simple push or pull.

#### **Function**

An alternative to knob or lever handles. Makes opening a latched door as natural as opening an unlatched one - just push or pull in the direction in which the door swings. Compatible with any Adams Rite 4300, 4500 or 4900 Series Deadlatch, MS+1890 Deadlock/ Deadlatch, or 2190/2290 Interconnected Deadbolt/ Deadlatch.

#### Operation

Available in four configurations: push left, push right, pull left, and pull right. Can be reconfigured to any mode in the field. Dogging may not be utilized in pull configuration.



#### **Features**

#### **Paddle**

Extruded aluminum.

#### **Escutcheons**

Zinc allov with black finish. Secured to door stile with special binder posts that extend into the escutcheon to rigidly resist torque loads in any direction.

#### Cam Plug

Furnished for use with 4300, 4500 and 4900 Series Deadlatches. Cam plug not for use with MS+1890 Deadlock/Deadlatch or 2190/2290 Interconnected Deadbolt/ Deadlatch. Secured in latch body by cylinder set screw, plug is also rigidly tied to escutcheon by hardened steel pins.

#### **Monitor Switches**

4591M: Paddle without latch drive mechanism but with switch that can be wired to make or break a low voltage circuit.

4591MA: Paddle with latch drive mechanism, complete active paddle with switch.

91-0914 Monitor Switch Kit: Adds monitor switch function to 4591 Paddle for "push" version only.

#### **Paddle Dogging**

"PUSH" version only: Turning hex key in escutcheon holds the paddle down, leaving door freeswinging. Dogging key provided.

#### Standard Package

Individually boxed with mounting hardware. Units for 4300, 4500 or 4900 Series Deadlatches include cam plug.


#### **Shipping weight**

1-1/2 lb [0.68 kg].


#### **Options**

- First dash number specifies operation, handing and compatible latch. If required, use second dash number to specify nonstandard units for doors thicker than 1-3/4" [44.5 mm]. Please see configuration table or contact factory for more information.
- 4591M Paddle switch to actuate magnetic lock, alarm, etc. No latch retracting mechanism.
- 4591MA Active paddle with switch and latch retracting mechanism.
- · 4781 Two-Point Deadlatch uses a modified, but matching version of the 4591 Paddle.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized. US3 (605) Bright brass, and US26D (626) Satin chrome special finishes are also available






#### Stile Preperation



#### Installation

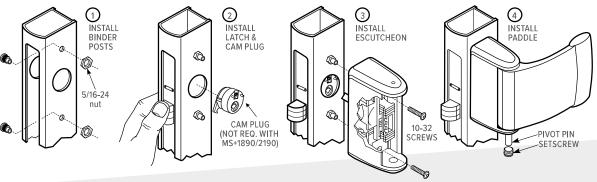

#### How to Order, Related, & Compatible Products

**4591 Deadlatch Paddle:** Specify quantity and the following information. Order related products separately.

MODEL	OPTIONS*	OPERATION			DOOR THI	CKNESS	FINISH**	
4591	М	02			-00		-313	
	- Standard Paddle	FIRST DASH FOR LATCH SERIES	OPER	RATION	USE	For 4300, 4500, 4900 Series Deadlatches	For MS+1890, 2190	313 Dark Bronze Anodized
	M Paddle w/	<b>-01</b> 4300/4500/4900	PULL	P	Outside of left hand	00 1-3/4"	00 1-3/4"	335 Black
	switch only	<b>-11</b> MS+1890/2190	TO LEFT	ŗ	reverse door or inside of right hand	<b>01</b> 1-13/16" to 2"	<b>01</b> 1-3/4" to 2-1/4"	Anodized
	MA Active paddle w/ switch	<b>-02</b> 4300/4500/4900	PUSH TO LEFT	P.	Outside of left hand door or inside of right hand reverse	<b>02</b> 2-1/4" to 2-1/2"	<b>02</b> 2-5/16" to 2-1/2"	628 Clear
		<b>-12</b> MS+1890/2190		S H		<b>03</b> 2-3/4" to 3"	<b>03</b> 2-9/16" to 2-3/4"	Anodized
		<b>-03</b> 4300/4500/4900	PULL	P	Outside of right	04 3-1/4"		US3 Bright Brass
		<b>-13</b> MS+1890/2190	TO RIGHT	<u> </u>	hand reverse door or inside or left hand			US26D Satin Chrome
		<b>-04</b> 4300/4500/4900	PUSH	P	Outside of right hand			
		<b>-14</b> MS+1890/2190	TO RIGHT	Š	door or inside of left hand reverse			
		LH -03 OR -13 -02 OR -12 -04 OR -14 LHR -01 OR -11			04 OR -14 02 OR -12 03 OR -13			

<sup>\*</sup>MA options availble on push paddles only, not pull paddles. \*\*Finish applied to paddle assembly only, not escutcheon.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

#### ACCESSORIES 91-0914 Monitor Switch Kit, 91-0912 Adapter Platet

DEADLOCKS	DEADLATCHES
MS+1890 Deadlock/Latch, 2190 Series Interconnected Deadbolt/Deadlatch	4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN Series Deadlatches.









#### Heavy Duty Designer Deadlatch Handles

The 4600 Heavy Duty Designer Deadlatch Handles are designed to operate Adams Rite deadlatches and retro-fit onto the 2190 Interconnected Deadbolt/Deadlatch. Offered in a wide range of lever designs and architectural finishes to match the clean lines of a narrow stile door.



Designed to operate 4300, 4500, and 4900 Series Deadlatches with either an upward or downward motion. 4600 Deadlatch Handles can be retrofitted in the field onto the 2190/2290 Interconnected Deadbolt/Deadlatch. Shipped handed, but easily reconfigured to accommodate either door swing. MV and MN handle types cannot be re-handed. The patented adjustable drive mechanism allows the escutcheon to be set back from the door edge at the time of installation to provide additional clearance. Monitoring switch optional to provide signal when lever is actuated.



#### **Features**

#### Handle

Available in standard and designer series levers to blend with existing architecture or to create a new design statement. Made from solid cast stainless. brass, or bronze, and finished to match any design requirement.

Standard series lever styles (-01, -02, -03) are designed to return within 1/2" [12.7 mm] of the door face, often required by code.

Please verify local code requirements to ensure compliance.

#### **Escutcheons**

Mounted base is secured by hidden screws and has two large helical compression springs. A 1/4" [6.4 mm] square heat-treated spindle is part of escutcheon assembly, which interlocks with the cam plug. Finished to match lever.

#### Cam Plug

Cam plug is required when 4600 handles are used to operate 4300, 4500 or 4900 Series Deadlatches.

Secured to the latch body by cylinder setscrew, the cam plug is tied to the handle escutcheon by integral anti-rotation pins.

Handing easily reversed with push-and-release cam design.

#### Standard Package

Individually packaged with cam plug (as needed), fasteners, and optional equipment specified.

#### Shipping weight

3 lbs [1.36 kg].

#### **Options**

· Ordered for left or right hand door, but is easily reconfigured in the field to accommodate either door swing.

- Standard handles are for 1-3/4" [44.5 mm] thick doors. Please contact factory for doors up to 3-1/4" [82.6 mm] available by special order. Please use part number DTK-4600 for fixed lever (dummy) kit.
- · Please use part number TBK-4600 for through-bolt mounting kit for back-to-back mounting on wood doors.
- Available in choice of US3 (605) Bright brass, US4 (606) Satin brass, 10B powder coat to match Dark Bronze, US32 (629) Bright stainless, or US32D (630) Satin stainless.


#### **Product Note**

The 4600M with switch option cannot be used in conjunction with the 4300 Electrified Deadlatch.




Handles


#### **Dimensions**



#### Stile Preparation



#### Installation



#### How to Order, Related & Compatible Products

4600 Heavy Duty Deadlatch Handles: Specify quantity and the following information. Order related products separately.

MODEL	REX	F	IANDLE	HANDING**	DOOR THICKNESS	COMPATIBLE PRODUCTS	FINISH
4600	M		-01	-5	1	1	-32D
	(blank) Standard	STAND	ARD HANDLES	5 LH or LHR	1 1-3/4" to 1-7/8"	1 2190, 2290 Interconnected	US3 Bright Brass
	M Monitored Trim	01 Curve	9	6 RH or RHR	2 2" to 2-1/8"	Deadbolt/Deadlatch	US4 Satin Brass
		02 Rour	d		<b>3</b> 2-1/4" to 2-3/8"	<b>2</b> 4300, 4500, 4900	10B to match Dark Bronze
		03 Square			<b>4</b> 2-1/2" to 2-5/8"	Series Deadlatches	US32 Bright Stainless
		DESIGN	IER SERIES		<b>5</b> 2-3/4" to 2-7/8"		US32D Satin Stainless
		MD	MJ				
		ME	MN* (Handed)				
		MG	MV* (Handed)				
		MI	MW				

<sup>\*</sup> Handing must be specified for MN and MV Designer Levers. \*\*Handing - assumes lever on interior of door.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

#### ACCESSORIES

REX-4600 Request to Exit, DTK-4600 Fixed Lever (dummy) Kit, TDK-4600-XX Thick Door Kit for doors 2" to 2-7/8", TBK-4600-XX Thru-Bolt Mounting Kit for back-to-back mounting on wood doors.

#### **COMPATIBLE PRODUCTS**

#### DEADLATCHES

4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN Series Deadlatches.



# Cylinders & Accessories



4000 Series MS® Deadlock Strikes add aesthetics and finish to strike cutouts in jambs.

#### **Function**

The majority of Adams Rite MS\* deadlocks are installed in aluminum construction where the strike cutout can be simply a slot in the jamb. However, for aesthetic reasons or in the case of the MS4002 for added security, many who specify an MS\* deadlock add one of these strikes.

#### 4000 Trim Strike

A simple strike plate that can be surface mounted or mortised flush in hollow metal or wood applications.

#### **Materials**

Made of aluminum. Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.

#### 4001 Box Strike

Similar to the 4000 Strike, but with dust box added. Customarily used only for wood construction where the dust box prevents chips, sawdust, and other debris from entering strike.

#### Materials

Trim plate is aluminum, dust box is steel plated for corrosion resistance. Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized, US3 (605) Bright brass, US26D (626) Satin chrome.

#### MS4002 Armored Strike

Similar to the 4000 and 4001 strike plates, but backed up by a massive steel doubler designed to prevent the method of forced entry known as "jamb peeling". Fits within aluminum or other hollow jamb sections with trim face flush, the steel completely hidden.

- Available flat for single doors or radiused for pairs of doors.
- May be used with two-point and three-point MS® deadlocks, including the hookbolt version in sliding doors where hookbolt use dictates door/jamb gap of 1/8" or less.
- MS4002 Armored Strike is unhanded and may be used with RH or LH swinging or sliding doors.

#### Materials

Trim plate is aluminum, reinforcement doubler is steel-plated for corrosion resistance. Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized, US3 (605) Bright brass, US26D (626) Satin chrome.







#### 4003 ANSI Strike

Designed for ANSI applications for use with the MS1850SN Deadlock.

#### Materials

Trim plate is stainless steel. Available in choice of US26D (626) Satin chrome, powder coat 121 to match 313 Dark bronze anodized.

#### 4005 Threshold Strike

Designed for a drop-bolt such as 4015 Threshold Bolt or 4016 Header Bolt in non-metal installations such as wood or concrete.

#### Materials

Trim plate is stainless steel. Available in US32D (630) Satin stainless.

#### 4006 Floor Strike

Similar to 4001 Box Strike, the 4006 Floor Strike is a trim plate with dust box added for strike slot cut into metal thresholds. Designed for use with the 1830 Bottom Rail Deadlock.

#### Materials

Trim plate is stainless steel. Available in choice of US32D (630) Satin stainless, powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, and 130 to match 628 Clear anodized.

#### **Features**

#### Standard Package

Individually packaged with machine screws and wood screws.

#### **Options**

 Specify flat or radius shape of trim plate, compatible deadlock, and square or round corners when ordering.

#### How to Order & Compatible Products

4000 Series MS\* Deadlock Strikes: Specify quantity and the following information. Order related products separately.

MODEL	TRIM PLATE SHAPE	COMPATIBLE DEADLOCK	TRIM PLATE CORNERS	FINISH
4001	-0	1	1	-313
4000 Trim Strike	<b>0</b> Flat	1 All Standard MS® locks with 1-3/8" Bolt Throw	1 Square	313 Dark Bronze Anodized
4001 Box Strike	1 Radius	2 1850A-020 with 3/4" Bolt Throw Only	2 Round	335 Black Anodized
MS4002 Armored Strike		3 All MS-050 "Hookbolt" locks		628 Clear Anodized


#### COMPATIBLE PRODUCTS

DEADLOCKS Most Adams Rite MS® Deadlocks




#### **Dimensions**

#### 4000 Trim Strike




#### 4001 Box Strike


Strike plate with dust box




#### 4002 Armored Strike

Strike plate with reinforcement



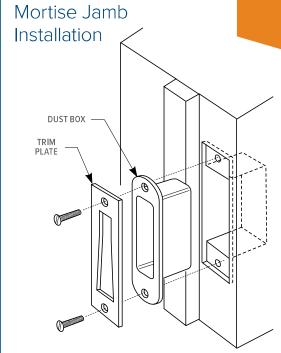

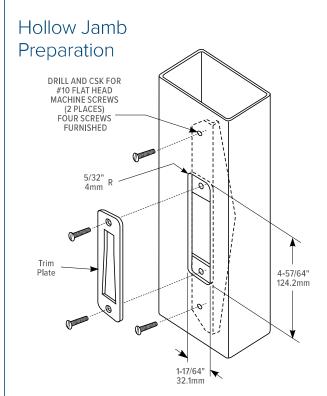





## 4015 **Threshold Bolt**

Security for pairs of doors with single key turn is possible with the 4015 Threshold Bolt. The two-point locking solution secures the entire double door entrance when working in conjunction with an MS® Deadlock.

#### **Function**

Adding the 4015 Threshold Bolt to a pivoted bolt MS® deadlock provides Maximum Security for pairs of doors with the turn of a single key. Simultaneously dropping a stainless steel hexbolt into the threshold and pivoting the massive MS° bolt into the mating door's stile, the two-point locking solution secures the entire entrance. The 4015 Threshold Bolt is harnessed to the rear of the pivoted bolt. It may be added to any basic MS1850S, MS1850SN, MS1950 Series deadlock.

Both the 4015 Threshold Bolt and the 4016 Header Bolt may be added to a pivoted bolt MS<sup>®</sup> deadlock to provide Maximum Security for pairs of doors by the turn of a single key. Simultaneously extending the stainless steel hexbolts into the threshold and header and pivoting the massive MS° bolt into the mating door's stile, thereby providing a three-point locking solution.

#### Operation

360° turn of key or thumbturn in basic MS\* deadlock throws counterbalanced bolt into opposite door and drops bolt into threshold. Key can be removed only when bolts are in a positively locked or unlocked position.



Lock available separately

#### **Features**

#### **Cylinder Height**

Standard threshold bolt rod is sufficient for cylinder height up to 53-7/16" [1357.3 mm]. It is fully threaded and can be cut off for low cylinder heights. Please contact factory for rods pre-cut to specific cylinder heights, available by special order for high volume applications.

#### Adjustment

Exact adjustment of threaded rod to cylinder heights is locked in place by hexagonal threshold bolt.

#### **Strike**

For drop-bolt, a 1/2" [12.7 mm] diameter hole in metal threshold is suitable. For non-metal installation, 4005 Strike is available separately.

#### Threshold Bolt

Hexagonal 3/8" [9.5 mm] flat to flat. Made of stainless steel.

#### Standard Package

Packed separately with bolt guide, screws, and attachment pin.

#### **Shipping Weight**


1 lb [0.45 kg].

#### **Options**

· For "universal" application, specify 4015-18-IB with fully threaded rod for cut off to any cylinder heights below 53" [1346.2 mm]. Please contact factory for cylinder height greater than 53" [1346.2 mm] to maximum 60" [1524mm] or to specify rods pre-cut to specific cylinder heights available by special order for high volume applications.




#### **Dimensions**

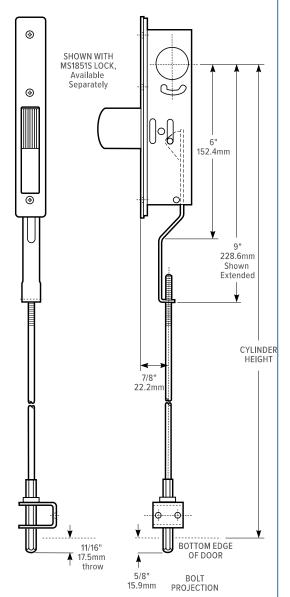

#### Installation

Install adaptor arm in lock from rear with bolt retracted as shown. Drive pin through slots in lock side plates passing through hole in the adaptor arm.

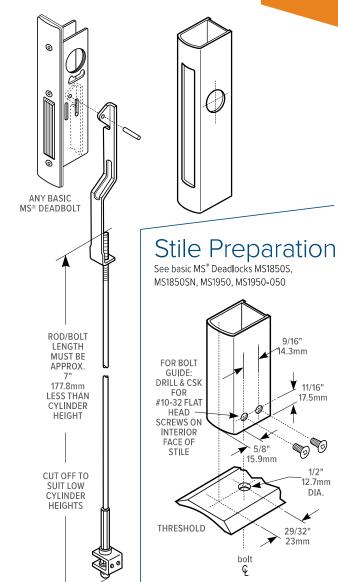

#### How to Order, Related & Compatible Products

4015 Threshold Bolt: Specify quantity and the following information. Order related products separately.

MODEL	ADD DASH NUMBER FOR "UNIVERSAL SIZE"	PACKAGING
4015	-18	-IB
		IB Individually Boxed

Please specify cylinder height if ordering in volume for a specific cylinder height.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

ACCESSORIES
4016 Header Bolt, 4085 Header Bolt

DEADLOCKS	ACCESSORIES
MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1950, MS1950-050 Series Deadlocks	4005 Strike



## 4016 Header Bolt

Security for pairs of doors with single key turn is possible with the 4016 Header Bolt. The two-point locking solution secures the entire double door entrance when working in conjunction with an MS® Deadlock.

#### **Function**

Adding the 4016 Header Bolt to a pivoted bolt MS\* deadlock provides Maximum Security for pairs of doors with the turn of a single key. Simultaneously extending the stainless steel hexbolts into the header and pivoting the massive MS\* bolt into the mating door's stile, the two-point locking solution secures the entire entrance. The 4016 Header Bolt can be added to any basic MS1850S, MS1850SN, MS1950 Series deadlock or for two-points top and bottom use with 1870/1870HM Cylinder-Operated Flushbolt. Not applicable to 7/8" backset locks.

Both the 4016 Header Bolt and the 4015 Threshold Bolt may be added to a pivoted bolt MS\* deadlock to provide Maximum Security for pairs of doors by the turn of a single key. Simultaneously extending the stainless steel hexbolts into the header and threshold and pivoting the massive MS\* bolt into the mating door's stile, thereby providing a three-point locking solution.

#### Operation

360° turn of key or thumbturn in basic MS° deadlock throws counterbalanced bolt into opposite door and hexagonal bolt into header. Key can be removed only when bolts are in a positively locked or unlocked position.



#### **Features**

#### **Door Height**

Select 7' [2133.6 mm] or 10' [3048 mm] door height. The standard version is designed for 7' [2133.6 mm] door height, with cylinder height as low as 35" [889 mm].

#### **Header Bolt**

Hexagonal 3/8" [9.5 mm] flat to flat. Made of stainless steel.

#### **Adjustment**

Exact adjustment of threaded rod to door height is locked in place by hexagonal header bolt.

#### Strike

For header bolt, a 1/2" [12.7 mm] diameter hole in metal frame is suitable. For non-metal installation, 4005 Strike is available separately.


#### Standard Package

Packed separately with bolt guide, screws, and attachment pin.

#### **Shipping Weight**

1 lb [0.45 kg].



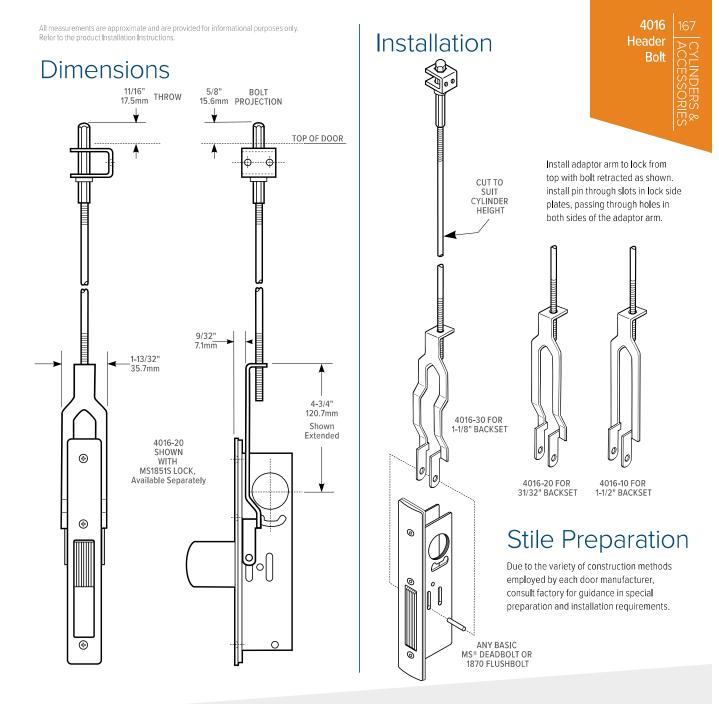

#### How to Order, Related & Compatible Products

4016 Header Bolt Specify quantity and the following information. Order related products separately.

MODEL	LOCK BACKSET	DOOR HEIGHT
4016	-30	-01
	10 1-1/2"	<b>01</b> 7' Door
	20 31/32"	<b>02</b> 10' Door
	30 1-1/8"	

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

ACCESSORIES
4015 Threshold Bolt, 4085 Header Bolt

DEADLOCKS	FLUSHLOCKS	ACCESSORIES
MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1950, MS1950-050 Series Deadlocks Not applicable to 7/8" backset locks.	1870, 1870HM Series Cylinder-Operated Flushbolts	4005 Strike





## 4085

#### Header Bolt (Pairs of Doors Only)

4085 Header Bolt provides top-of-door third locking point for pairs of doors when working in conjunction with an MS® pivoted bolt deadlock and 4015 Threshold Bolt in the active leaf.

#### **Function**

Designed to add a top-of-door third locking point for pairs of doors when used in conjunction with a pivoted bolt MS\* deadlock and 4015 Threshold Bolt in the active leaf. The 4085 Header Bolt is mounted in the inactive leaf. This additional bolt, triggered by the pivoted MS\* bolt, expands in a scissor-like action to center itself in its strike as it rises. This action saves the key holder from the difficulty of lining up the doors with three separate strikes, even if doors are misaligned due to faulty installation or settling. The 4085 Header Bolt can be added to any basic MS1850S, MS1850SN, MS1950 Series deadlock with the 4015 Threshold Bolt for a Maximum Security three-point locking solution.



360° turn of key or thumbturn in basic MS° deadlock throws counterbalanced bolt into opposite door, kicking positioner bolt into header strike. Positioner bolt may be manually thrown before closing active leaf to reduce effort on key-bow. Key can be removed only when bolts are in a positively locked or unlocked position.



#### **Features**

#### **Header Bolt**

1/2"  $\times$  1-1/2" [12.7 mm  $\times$  38.1 mm] expanding bolt with 5/8" [15.9 mm] throw. Housed in 1-1/2"  $\times$  2-3/4"  $\times$  5/8" [38.1 mm  $\times$  69.9 mm  $\times$  15.9 mm] case.

#### Adjustment

Minor adjustment of rod length is accomplished by turning nylon rod end.

#### Standard Package


Packed separately with rod guide, screws, and header strike.

#### **Shipping Weight**


1 lb [0.45 kg].



#### **Dimensions**

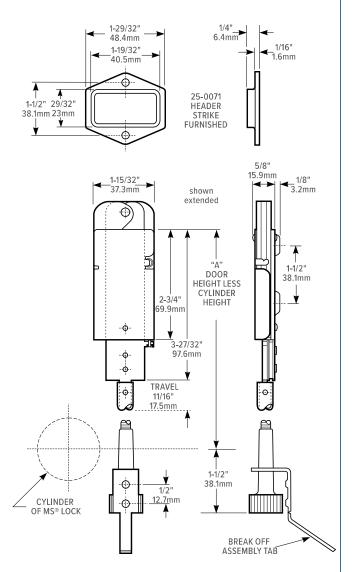

#### Header Preparation for Strike

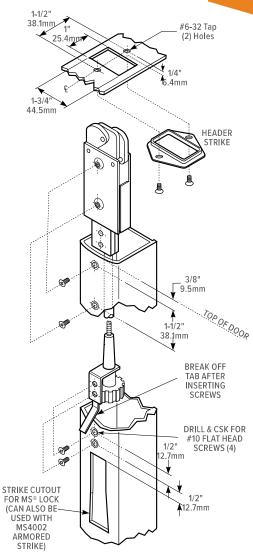

#### How to Order, Related & Compatible Products

4085 Header Bolt (Pairs of Doors Only) Specify quantity and the following information. Order related products separately.

MODEL	DIMENSION 'A'	PACKAGING
4085	-02	-IB
	<b>01</b> 30" - 52"	IB Individually Boxed
	<b>02</b> 52" - 67"	
	<b>03</b> 67" - 79"	
	<b>04</b> 79" - 92"	

Example				
DOOR HE <b>I</b> GHT		CYLINDER HEIGHT		А
96"	-	40"	=	56"
Reference 7' Door is 84"		9' Door is 108"		

10' Door is 120"

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

ACCESSOR <b>I</b> ES	
4015 Threshold Bolt	

#### **COMPATIBLE PRODUCTS**

DEADLOCKS

MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1950, MS1950-050 Series Deadlocks

Not applicable to 7/8" backset locks.

8' Door is 96"



## Indicator







#### **Exit Indicator**

4089 Exit Indicator provides exit door notification for various Adams Rite deadlocks.

#### **Function**

Provides unmistakable notification of lock status. Under many local building safety codes, this allows the use of a security deadlock with a double cylinder to be installed on a main exterior door provided it's paired with an indicator and proper signage. It includes two permanent adhesive header signs: "THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS." (that wording is according to Uniform Building Code). The second sign for NFPA and other local codes reads: "THIS DOOR TO REMAIN UNLOCKED WHEN THE BUILDING IS OCCUPIED.". Please consult local Authority Having Jusidiction (AHJ) for more information.





#### **Features**

#### Indicator

Words "LOCKED" in red letters or "OPEN" in green letters appear on white background when bolt is thrown or retracted respectively. Indicator is driven by lock bolt itself.

#### Materials


Indicator escutcheon is zinc alloy. Available in choice of powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, and 130 to match 628 Clear anodized. Header sign is clear aluminum match with black letters.

#### **Shipping weight**


1/2 lb [0.23 kg].

#### **Options**

• Standard unit fits 1-3/4" [44.5 mm] door. Specify for thicker doors up to 2-1/2" [63.5 mm].

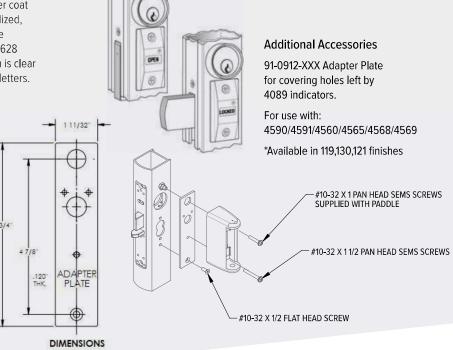






THIS DOOR TO REMAIN UNLOC

KED DURING BUSINESS HOURS 1/4" 6.4mm


381mm \*This sign correct under Uniform Building Code. Also includes NFPA wording "This Door to remain unlocked when the building is occupied".

HEADER SIGN - IN TWO PIECES\*

## Aluminium Stile



#### Wood & Hollow Metal Stile Preparation



#### How to Order, Related & Compatible Products

4089 Exit Indicator: Specify quantity and the following information. Order related products separately.

MODEL	OPTIONS	FINISH	
4089	-01	-130	
	00 Standard 1-3/4" Door	119 To match 335 Black Anodized	
	01 For Inverted Lock	121 To match 313 Dark Bronze Anodized	
	20 For Doors up to 2-1/2"	130 To match 628 Clear Anodized	

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

ACCES	SORIE	S	

91-0912 Adapter Plate, 22-0819 Cover Plate, 20-0255-IP Header Sign, 20-0256-IP IBC Header Sign

DEADLOCKS	FLUSHLOCKS
MS1837, MS1850S, MS1850S-050, SCH1850S, MS1850SN, MS1850SN-050, SCH1850SN, MS+1890, MS1950, MS1950-050, Series Deadlocks	1870, 1870HM, 1877 Series Cylinder- Operated Flushbolts



## Aluminium



## 4800

#### Series Strikes

4800 Series Strikes add aesthetics and finish to strike cutouts in metal or wood jambs.

#### 4800

With vertical adjustment to accommodate door/jamb misalignment and a shim system for horizontal positioning to match various jamb bumper designs, the 4800 Series Strikes can be fit to nearly any sliding door using a mortised MS1847 Deadlock/Deadlatch.

#### **Materials**

Steel, heat treated. Shims are ABS plastic. Available in choice of Zinc (603) finish, US32D (630) Satin Stainless.

#### MS4804

This reinforcing strike provides strength equal to the strength of the stainless steel bolt of the MS1847 Deadlock/Deadlatch: tested to 1000 lbs [453.59 kg] of force. This strength by far exceeds the standards of the Architectural Aluminum Manufacturers Association as well as the strictest current municipal security ordinance.

#### **Faceplate**

Measures 1/16"  $\times$  3/4"  $\times$  3-3/8" [1.6 mm  $\times$  19.1 mm  $\times$  85.7 mm]. Steel, plated for corrosion resistance. MS4804-10 available in US32D (630) Satin Stainless.

#### **Reinforcing Plate**

Measures 1/16"  $\times$  1/2"  $\times$  3-3/8" [1.6 mm  $\times$  12.7 mm  $\times$  85.7 mm]. Steel, plated for corrosion resistance. Tapped for furnished #10-32 flathead screws.





#### **Features**

#### **Standard Package**

All strikes are individually packaged with screws and shim if required.

**4801 Strikes** are furnished with sheet metal screws for metal jamb installation.


**4802 Strikes** are furnished with machine screws and tee nuts which are installed on the back side of the jamb to provide the strongest possible anchorage in wood.

#### **Shipping Weight**

1/2 lb [0.23 kg]




#### Dimensions 4800 Series




APPLICATION	PART NO.	SHIMS	DIMENSION 'A'
	4801	NONE	0
Metal jambs (furnished with two #8 x 1 sheet metal screws	4801-01	1	3/32" (2.4mm)
	4801-02	2	3/16" (4.8mm)
	4801-03	3	9/32" (7.1mm)
We discuss the Manager to design	4802	NONE	0
Wood jambs (furnished with two #8-32 x 7/8" machine	4802-01	1	3/32" (2.4mm)
screws and two tee nuts)	4802-02	2	3/16" (4.8mm)
screws and two tee nuts)	4802-03	3	9/32" (7.1mm)

## Jamb Preparation 4800 Series


	HOLE SIZE	
Metal jamb application 4801 series	1/8" 3.2mm	(No. 31 DRILL)
Wood jamb application 4802 series	7/32" 5.6mm	(No. 3 DRILL)



#### Dimensions MS4804



## Jamb Preparation MS4804 CLEARANCE HOLE FOR #10 SCREW.



#### How to Order & Compatible Products

4800, MS4804 Strikes: Specify quantity and the following information. Order related products separately.

MODEL	TYPE OF JAMB	DIMENSION 'A'	FINISH
480	1	-02	-630
	1 Metal	<b>01</b> 3/32" (2.4mm)	603 Zinc Plated Steel
	2 Wood	<b>02</b> 3/16" (4.8mm)	<b>630</b> Satin Stainless
		03 9/32" (71mm)	

DEADLOCKS
MS1847 Deadlock/Deadlatch



Hollow Metal

## 4901, 4902

#### Deadlatch Strikes

4901, 4902 Deadlatch Strikes add aesthetics and finish to strike cutouts in jambs.



Designed for use in conjunction with 4300, 4500, 4700, and 4900 Series Deadlatches, these strikes offer a choice of mounting methods. A backup mounting plate included with the 4901 and 4902 allows installation flush in a hollow section jamb. Accommodates the 1/2" [12.7 mm] wide latchbolt of 4500/4700 Series Deadlatches and 5/8" [15.9 mm] wide latchbolt of 4900 Series Deadlatches by removing snap-in nylon insert.



4901

#### **Features**

#### 4901

#### -01

Flush mount flat strike. Standard slat strike includes molded black plastic dust box and closure of the unused lower strike opening, with steel mounting plate. Long face is designed to span strike area of MS® deadlocks with which the deadlatch is interchangeable.

#### -02

Flush mount radius strike. Same as 4901-01, except with radiused strike plate, for nose of opposite door when latching pairs.

#### 4902

#### -01

Short box flat strike. Standard flat strike furnished with the 4900 Series Heavy Duty Deadlatches. Includes molded black plastic dust box and steel mounting plate. Short face design.

#### -02

Short box radius strike. Same as 4902-01, except with radiused strike plate, for nose of opposite door when latching pairs.

#### **Materials**

Strike plate is stainless steel. All strikes are unhanded, suitable for right or left hand doors.

#### **Shipping Weight**

1/2 lb [0.23 kg]

#### **Options**

• Use 4506-02 ANSI strike for wood or steel jambs.

#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:

Extended Lip Strikes

DEADLATCHES	EXIT DEVICES
4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN (4506-02 only) Series Deadlatches.	8300 (4506-02 only), 8400 Mortise Exit Device




#### Dimensions 4901 CSK FOR #10 MOUNTING 3/8" 10-32 TAP FLAT HEAD PLATE 9.5mm STRIKE PLATĘ 3/8" 9.5mm 3/4" 19.1mm dust ⊚ 4-5/8" 6-1/8" 1-1/8" 117.5mm 155.6mm 28.6mm 3-7/8" 98.4mm 43/64" 17.1mm 1-1/8" 5-3/8" 28.6mm 136.5mm 3/4" 19.1mm -⊕ - ⊕ 1-1/8" 1/8" → 28.6mm **4** ″° 3.2mm 9/16" 11/32" 2-15/32 8.7mm \_ 9/16" 62.7mm R 1-3/16" 14.3mm 30.2mm


DIM: 'A'

4901-01 FLAT

WITH DUST BOX & MOUNTING PLATE

#### Installation



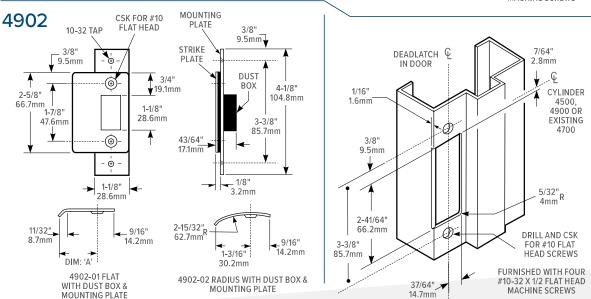

#### How to Order, Related & Compatible Products

4901, 4902 Deadlatch Strikes Specify quantity and the following information. Order related products separately.

4901-02 RADIUS

WITH DUST BOX & MOUNTING PLATE

М	10DEL	STRIKE TYPE	FACEPLATE SHAPE					FINISH
4	490	1	-02					630
			STANDARD LIP	LONG LIP FOR CENTER HUNG DOOR	DIM. 'A'	LONG LIP FOR CENTER HUNG DOOR	DIM. 'A'	<b>119</b> To match 335
		1 Long	01 Flat	03 2-1/4" Wide Jamb	1-1/8	13 3-1/2" Wide Jamb	1-3/4	Black Anodized
		2 Short	02 Radius	05 2-1/2" Wide Jamb	1-1/4	15 3-3/4" Wide Jamb	1-7/8	121 To match 313 Dark
				07 2-3/4" Wide Jamb	1-3/8	17 4" Wide Jamb	2	Bronze Anodized
				09 3" Wide Jamb	1-1/2	19 4-1/4" Wide Jamb	2-1/8	630 Satin Stainless Steel
				11 3-1/4" Wide Jamb	1-5/8	21 4-1/2" Wide Jamb	2-1/4	







## 4024, 4025, 4026

#### Cylinder Pulls

4024, 4025, 4026 Cylinder Pulls are designed to operate Adams Rite MS1847 Deadlock/Deadlatch and 5017 Wood Door Deadlock/Deadlatch.

**4024.** The five pin tumbler 4024 Cylinder Pull is smaller than the 4025 Cylinder Pull and it is symmetrical, designed for mounting door pull or other trim plate. Can be mounted directly on stile where lock mechanism is mounted on inside surface of stile rather than mortised.

**4025.** The five pin tumbler 4025 Cylinder Pull has mounting holes spaced to allow clearance around MS1847 Deadlock/Deadlatch mechanism for long through-the-stile mounting screws.

**4026**. The five pin tumbler 4026 Cylinder Pull is designed for use with 5017 Wood Door Deadlock/ Deadlatch for wood door applications.



Designed for use with Adams Rite MS1847 Deadlock/ Deadlatch and 5017 Wood Door Deadlock/Deadlatch, these surface mounted pulls allow a sliding door to be keyed-in with other doors which have cylindrical or mortise locks.





#### **Features**

#### **Trim Finish**

Zinc alloy housing. Brass cylinders.

#### **Cylinder Both Sides**

A pair of 4025 Cylinder Pulls can be mounted opposite each other with long machine screws. Security is maintained since each side offers access to only one screwhead. Both screws would have to be removed to operate the lock without its key. Specify 4025 CYLxCYL set.

#### **Options**


- Cylinder Make
  - Pulls available with Schlage or Weiser Keyway cylinders.
- Available in choice of powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, and 130 to match 628 Clear anodized.



AVAILABLE ON HIGH QUANTITY ORDER.

#### **Dimensions**

#### 4024



#### 4025 22.2mm 7/16" 1-7/32" 1/8" 11.1mm 31mm 3.2mm $\bigcirc$ (4 PLCS.) 50.8mm 2-29/32" 73.8mm \*4026, LIKE 4025 BUT WITH MOUNTING HOLES ON 2-35/64" 64.7mm CENTERLINE FOR USE WITH 5017 LOCK


3/4"

19.1mm


SPINDLE

#### Stile Preparation

For 4025 mounted directly on stile



#### Installation

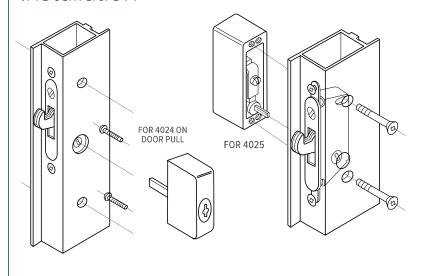

#### How to Order & Compatible Products

4024, 4025, 4026 Cylinder Pulls: Specify quantity and the following information. Order related products separately.

MODEL	PULL NO./CYLINDER INCLUDED	KEYING	FINISH
4024	-00	-01	-130
4024 Trim Plate Mounted	00 Schlage "C" Keyway	<b>01</b> Keyed different	119 To match 335 Black Anodized
4025 Stile Mounted with through-screws	06 Weiser Keyway	02 Keyed alike in pairs	121 To match 313 Dark Bronze Anodized
4026 For Wood Applications			130 To match 628 Clear Anodized

See current price list to order 4025 cyl x cyl, cylinder both sides pullset.

DEADL	LOCKS
MS1847 Deadlock	5017 Wood Door Deadlock (4026 only)









4036 Mortise Cylinder

### 4066 Thumbturn

The 4036 Mortise Cylinder provides five-pin security with most Adams Rite deadlocks or deadlatches. The 4066 Thumbturn operates deadlocks or deadlatches without a key.

#### **Function**

#### 4036

A standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter cylinder with five-pin tumbler security. Designed to operate any Adams Rite deadlock or deadlatch requiring a mortise cylinder. Close tolerance manufacturing achieve set screw grooves and cam geometry that are true on their respective center lines. This ensures proper mating and operation with the locking or latching mechanism. Select cam to suit particular Adams Rite deadlock or deadlatch.



To operate deadlock or deadlatch without key. Interchanges with standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder. Cams are available to suit the particular Adams Rite deadlock or deadlatch. See next page for cam specifications.





#### **Features**

#### Shell

**4036:** Aluminum with 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized finish. Plug is US26 (625) Bright chrome.

**4066:** Choice of three finishes: 130 to match 628 Clear anodized, 313 Dark bronze anodized, 335 Black anodized.

#### **Trim Ring**

Furnished. 1/4" [6.4 mm] thick, suitable for 1-3/4" [44.5 mm] thick doors. Available by special order for other door thicknesses.

#### Keying

All cylinders furnished with two keys per cylinder. Available in keyed different (KD), or keyed alike pairs (KA2). Keyed alike 50 are available by special order in quantity of 50 cylinders only. Please contact factory for ordering information.

#### Standard Package

Individually packed with trim ring. 4036 furnished with keys.

#### **Shipping Weight**

1/2 lb [0.23kg]

#### Cylinder by Others

Adams Rite deadlocks and deadlatches are designed to accept standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinders of all popular makes. This means that the entrance can be keyed to match the system used throughout the building on other types of doors. Care must be taken, however, to specify the proper cam for each type of lock, as these are not generally interchangeable. The cam shapes shown are available from the listed cylinder manufacturers and will be supplied by them with the cylinder when specified or available separately. Because of variations in the attachment of cams to cylinders and other construction differences, it is advisable to NOT attempt using one manufacturer's cylinder with another manufacturer's cam.



FOR MS® LOCKS: TR\* = A + .125 – B

\*TOLERANCE: ± .060

FOR 2190 TR\* = A - B

TR\* = A + .132 – B

"A" is cylinder height (less shoulder but including cam).

"B" is one-half of door thickness.

# How to Order & Compatible Products

4036 Mortise Cylinder: Specify quantity and the following information. Order related products separately.

MODEL	LOCK TYPE	KEY OPTIONS*	FINISH
4036	-01	-01	-628
	01 For MS® Lock, 4900 Deadlatches, 2190	01 Keyed different	313 Dark Bronze Anodized
02 For 4070 Deadlock		02 Keyed alike in pairs	335 Black Anodized
	03 For 2331 Deadlock		628 Clear Anodized

<sup>\*</sup> Keyed alike 50 are available by special order in quantity of 50 cylinders only. Please contact factory for ordering information.

4066 Thumbturn: Specify quantity and the following information. Order related products separately.

MODEL	LOCK TYPE	FINISH
4066	4066 -01 -130	
	01 For MS® Lock, 4900 Deadlatches	130 To match 628 Clear Anodized
	02 For 4070 Deadlock	313 Dark Bronze Anodized
	03 For 2331 Deadlock	335 Black Anodized

DEADLOCKS	DEADLATCHES	FLUSHLOCKS	EXIT DEVICES	TRIM
1830, MS1837, MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1861, 1875, MS+1890, MS1950, MS1950- 050, 2190, 2290 Series Deadlocks	4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN Series Deadlatches 4781 Two Point Deadlatch (4036 only)	1870, 1870HM, 1877 Series Cylinder- Operated Flushbolts	8300, 8400 Mortise Exit Devices, 8500, 8600 CVR Exit Devices w/8650 Cylinder Escutcheon	3080, 3080E Series Entry Trim, 3090-150



# Aluminium



# MS4043 Cylinder Guard

MS4043 Cylinder Guard is a hardened-steel ring to protect cylinder from vandalism.

# **Function**

The standard mortise cylinder is made of brass. It is literally a soft spot in narrow stile door security. Using special pliers, a pipe wrench or other leverage device, a burglar can tear the cylinder out of the door, leaving an opening through which the deadlock may be operated.

# The MS4043 Cylinder Guard offers a threeway defense against this problem:

- **1.** The outer shield ring is fully beveled to offer poor purchase for either prying or twisting.
- **2.** The ring is hardened steel so that the combination of shape and hardness make it virtually impossible to grip, even with sharpened tools.
- 3. In the event that a prying tool such as a cold chisel is driven into the stile behind the shield ring, the would-be burglar is obliged to pull a heavy steel plate through a round hole in the 1/8" metal door stile. This degree of leverage is far beyond that available with most hand tools.



# **Features**

#### **Security Ring**

Made of hardened-steel. Freeswiveling when properly installed.

# **Retainer Ring**

Hardened-steel, plated for corrosion resistance. Permits security ring to swivel.

#### **Trim Finish**

Powder coat 119 to match 335 Black anodized, 121 to match 313 Dark bronze anodized, 130 to match 628 Clear anodized

#### Standard Package

Individually packaged with spacers for flush fitting in thin stile walls. Cylinders available separately.


#### **Shipping Weight**

1/8 lb. [0.06 kg]


# **Options**

 MS4043 Cylinder Guard fits a standard 1/8" stile wall. For 1/4" thick stile walls, specify MS4043-01.




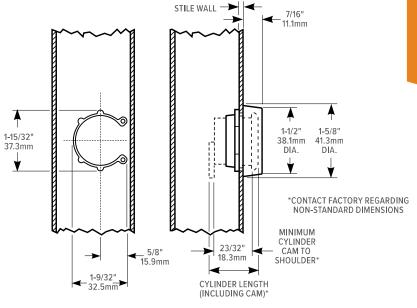





# Installation



# How to Order & Compatible Products

MS4043 Cylinder Guard Specify quantity and the following information. Order related products separately.

MODEL	STILE WALL & CYLINDER		FINISH
MS4043	-01		-130
	Stile Wall	Cylinder	119 To match 335 Black Anodized
	00 1/8"	5 or 6 pin	<b>121</b> To match 313 Dark Bronze Anodized
	01 1/4"	5 or 6 pin	130 To match 628 Clear Anodized
	<b>02</b> 1/8" (3.2mm)	1-5/16" to 1-7/16" long	

DEADLOCKS	DEADLATCHES	FLUSHLOCKS	EXIT DEVICES
1830, MS1837, MS1850S, MS1850S-050, MS1850SN, MS1850SN-050, MS1861, 1875, MS+1890, MS1950, MS1950- 050, 2190, 2290 Series Deadlocks	4300 Electrified Deadlatches, 4510, 4530, 4900, 4920AN Series Deadlatches 4781 Two point Deadlatch	1870, 1870HM Series Cylinder-Operated Flushbolts	8300, 8400 Mortise Exit Devices



# B1921 | B1923

# Reinforcing Pivots

B1921, B1923 Reinforcing Pivots provide an economical way to transfer load from hinges of sagging hollow metal or wood doors.







# **Function**

This full-surface reinforcing pivot adds years of life to openings where the hinges or hinge reinforcements have failed. Reinforcing pivots take the load off the top hinge and transfer it to screws that are in shear so they will not pull off. The quick and economical way to solve door sag problems.

# **Features**

#### Type

Full surface reinforcing pivots for flush doors.

#### **Finish**

Zinc plating over steel.

#### **Materials**

Heavy duty 3/16" [4.8 mm] cold-rolled steel.

# **Cycle Testing**

1,500,000 cycles

#### Capacity

Supports weights up to 300 lbs [136.08 kg]

#### **Hole Pattern**

Symmetrically located. Non-handed.

#### **Hinge Size**

**B1921:** designed with 1/2" [12.7 mm] offset to match the pivot point of a 4" [101.6 mm] wide butt hinge.

**B1923:** designed with a 3/4" [19.1mm] offset to match the pivot point of a 4-1/2" [114.3 mm] wide butt hinge.


# Standard Package

Comes complete with all necessary fasteners. Optional tamper-proof screw available.


# **Shipping Weight**

1-1/2 lb [0.68 kg]






MATCHES 4" HINGE BARREL CENTERLINE



# Installation

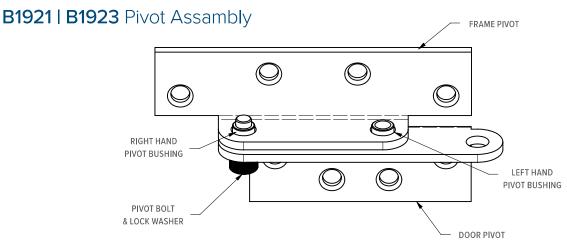


# How to Order & Related Products

B1921 | B1923 Reinforcing Pivots: Specify quantity and the following information. Order related products separately.


MODEL	HINGE SIZE
B192	1
	1 4"
	3 4-1/2"


#### **RELATED PRODUCTS**

When purchasing this product, please consider the following related products, available separately:





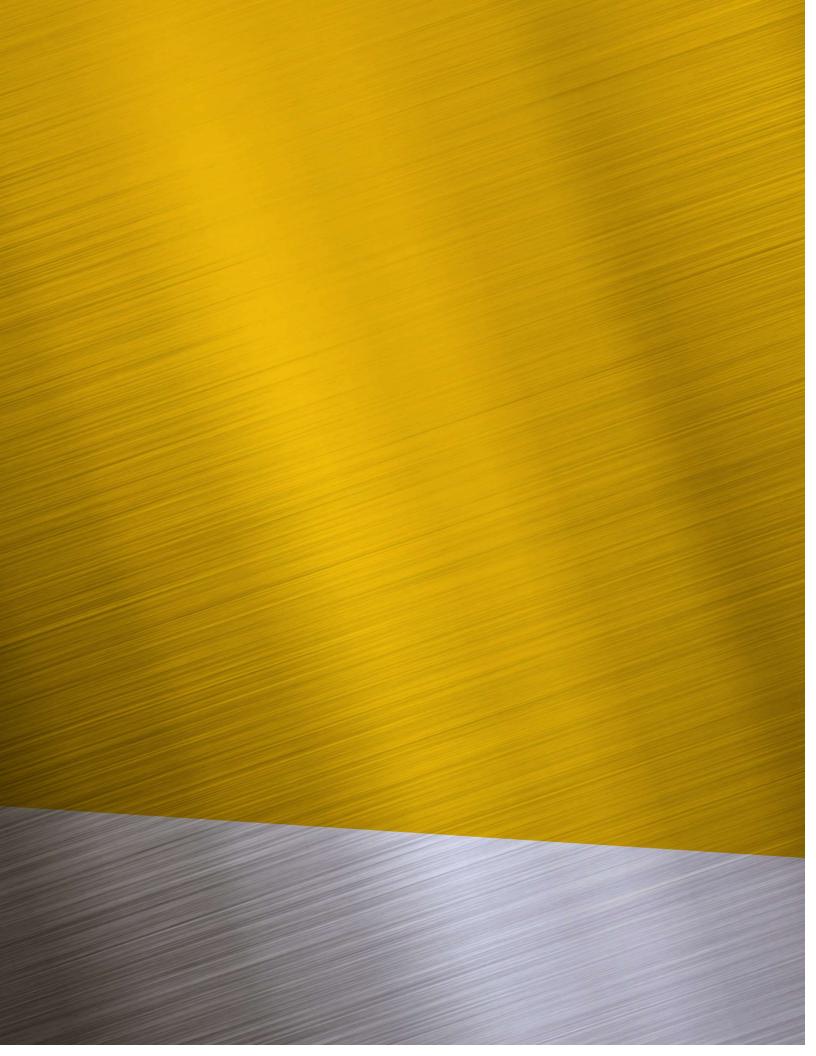

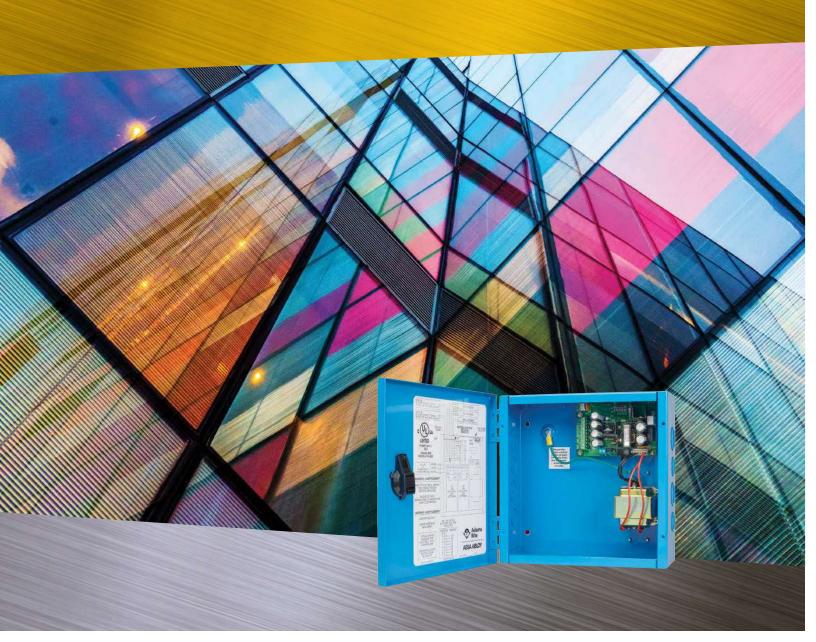

# LISTED US

# PS-EXIT

# **Power Supply**

Power supply for all 8000 and 3000 Series Exit Devices with Motorized Latch Retraction (MLR) or Electric Latch Retraction (LR) option.

# **Function**

This power supply is designed to provide power and control for up to two MLR or LR exit devices. Each exit device is controlled by a timer that is initiated by a switch closure. The timer is user-configured and holds the exit device(s) in the unlatched position for 2 – 60 seconds. At the end of the selected time, the exit device(s) will re-latch. If the switch controlling the exit device is closed longer than the selected time, the exit device remains unlatched until the controlling switch is released.

- An optional mode is available that allows both retraction timers to activate in response to a closure of either switch.
- Exit devices under access system control remain latched during a complete power failure but always allow free mechanical egress.



UL294

CAN/CSA-C22.2 No. 223



#### **Product Notes**

- PS-EXIT is designed to replace PS-SE and PS-LR models.
- Adams Rite recommends that for optimal performance all exit devices with the MLR or LR options are installed and powered using PS-EXIT power supplies. Failure to do so may cause permanent damage to the exit device.

# **Features**

#### Housing

Hinged, steel cabinet measures 10" x 10-3/8" x 4-1/8" [254 mm x 263.5 mm x 104.8 mm]. Blue, baked enamel finish with knockouts for conduit connections. Sized to accommodate two sealed, lead acid batteries (7AH, not included).

#### Timer

Initiated by switch closure to control each exit device. Timer is user-configured and holds exit device in unlatched position for 2 - 60 seconds. At end of selected time, exit device will re-latch.

#### **Operating Modes**

The PS-EXIT is designed to power up to two 8000/3000 MLR or LR exit devices in the following two modes:

- Single Input (Sequential Operation): either input retracts the corresponding exit device followed by retraction of the second device. Control doubledoor exit with one input.
- Dual Input (Independent Operation): Each exit device is controlled by its own input switch. Control two separate exits with two inputs.

# **Shipping Weight**

10 lbs [4.5 kg].

# Electrical

#### **Input Power**

115 VAC

#### **Rated Output Current**

Up to 0.8A per channel continuous rated output current


## **Typical Output Voltage**

- 24 26 VDC output voltage
- Up to 17 A pull-in current


# **Options**

The enclosure is sized to accommodate two 12 V - 7AH sealed, lead acid batteries (not included).



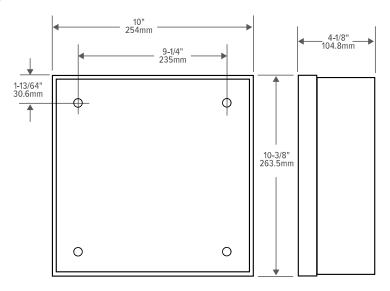

# Layout & Wiring

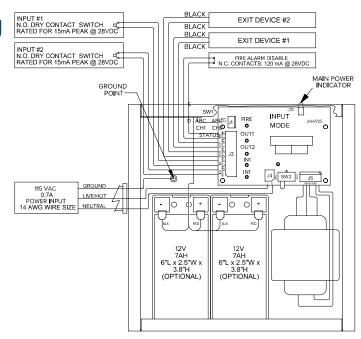

# How to Order, Related & Compatible Products

PS-EXIT Power Supply: Specify quantity and the following information. Order compatible products separately.

MODEL	POWER SUPPLY
PS	-EXIT
	<b>EXIT</b> Power Supply for exit devices with MLR and LR options

# **RELATED PRODUCTS**

When purchasing this product, please consider the following available separately:

POWER
4612 Power Transfer Device, 4605
Transformer, 4603 Rectifier

# **COMPATIBLE PRODUCTS**

EXIT DEVICES

8000 Series exit devices with MLR or LR option











# 4612

# Power Transfer Device

The 4612 Power Transfer Device channels electrical wiring from the door frame into the door itself. Designed for use with locks, exit devices, and more on doors hung with butt-type hinges.

# **Function**

Provides a secure and unobtrusive means of channeling electrical wiring from the door frame into the door itself, for powering electric strikes on the inactive leaf of a pair of doors, locks, exit devices, etc. Suitable for any door hung with butt-type hinges, including continuous or pivots offset 3/4" [19.1 mm] or less. Not compatible with center-pivot doors.



# Certifications

**UL** listed

# **Features**

## Housing

Stamped steel, approximately 1/16" [1.6 mm] thick. Short (105° swing) version shown is 11-1/12" [281.5 mm] long. 180° version is 20-5/21" [514mm] long. Chrome finish.

#### **Case Knife Guard**

Particularly for out-swinging doors, a steel barrier fence offers extra protection against attack on the conduit by knives, shims, or other tools. Completely hidden when door is closed.

#### Standard Package

Individually boxed with fasteners as required for each application type: aluminum, hollow metal, or wood.

## **Shipping Weight**

1 lb. [0.45kg]

# Electrical

#### Conduit

Spring steel helix has internal diameter of approximate 5/16". This provides ample room for multiple wires of the low voltage type used with most electrical hardware.

# **Options**


- Available for application in aluminum, hollow metal, or wood door and frames.
- · Standard (short) version suits doors that swing up to 105°. A longer version is available for doors that open 180°.
- Swing Clear option also available.



# Installation

# Door and Frame Prep — 105° Swing

- **1.** For wood frame, the rectangular cutout is 2" deep minimum.
- **2.** 4612 Power Transfer Device is designed to protect the wire. Care should also be taken when inserting wires through this device.
- 3. Only stranded wires to be employed.
- **4.** Size and number of wires must comply with the National Electric Code, NFPA, and local authorizes having jurisdiction. Wire size shall be at least 22 gauge.
- **5.** This device is intended for low voltage use only (30 VAC, 42.5 VDC, 10 W max.).
- **6.** Wire should be labeled, appliance wiring material with minimum 1/32" thick insulation.

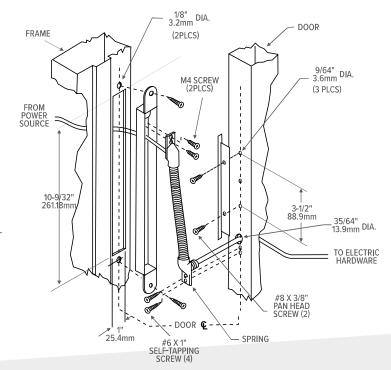

# How to Order & Compatible Products

**4612 Power Transfer Device:** Specify quantity and the following information. Order compatible products separately.

MODEL	ACCESSORY	
4612	-1	
	<b>1</b> 105° swing	
	2 180° swing	
	1-SC Swing clear, 90°	

DEADLATCHES	EXIT DEVICES	ELECTRIC STRIKES	TRIM
4300 Electrified Deadlatch	All 3000, 8000 Series electrified exit devices	7100/7101, 7110/7111, 7130/7131, 7140, 7160, 7170 Electric Strikes, 7240, 7270 Fire-Rated Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440, 74R1, 74R2 Electric Strikes	3080E Series Entry Trim



# Accessories For Power Supplies



# 4603 Rectifier

The 4603 Rectifier converts low voltage AC current to DC of same voltage. Installs in low voltage line between transformer and strike. Full wave bridge type. Rated 2 Amps (200 PIV).



# 4605 Transformer

The 4605 Transformer converts 120 VAC to 12/24 VAC. Rated 40 Volt-amp output assures sufficient power for electric strike.

#### Certifications

**UL** listed

# 4606 Plug-In Tranformer

The 4606 Plug-In Transformer converts 120 VAC current to 24 VAC. Plugs into standard wall outlet.

#### Certifications

UL listed


# 29-0218 Piezo Horn

Provides for audible indication when a DC electric strike is energized. Compatible with 12, 16, or 24 VDC electric strikes.







# **4603 Rectifier**

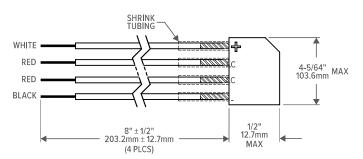


# 4606 Plug-In Transformer



# **4605** Transformer



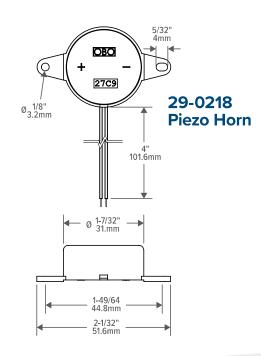

# How to Order, Related & Compatible Products

Accessories: Specify quantity and the following information. Order compatible products separately.

MODEL	ACCESSORY	
460	3	
	3 Rectifier	
	<b>5</b> Transformer	
	6 Transformer (Plug-In)	

**RELATED PRODUCTS** When purchasing this product, please consider the following available separately:

POWER
PS-SE, PS-LR Power Supply, 4612 Power Transfer Device

DEADLOCKS	DEADLATCHES	EXIT DEVICES	ELECTRIC STRIKES	TRIM
2190, 2290 Electrified Interconnected Deadbolt/Deadlatch	4300 Electrified Deadlatch	8700, 8800 electrified rim exit devices with EL options	7100/7101, 7110/7111, 7130/7131, 7140, 7160, 7170 Electric Strikes, 7240, 7270 Fire-Rated Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440, 74R1, 74R2 Electric Strikes	3080E Series Entry Trim





# Icons Glossary

Definitions of commonly used terms plus classifications and descriptions of the icons found throughout this catalog.



#### Aluminum

This product suitable for aluminum doors.



#### **Roll-Up Door**

This product suitable for roll-up doors.



## **Electrified Product**

This is an electrified product.



## Glass

This product suitable for full glass doors.



#### Fire-Rated

Products with a fire rating have been evaluated and listed to UL10C, "Positive Pressure Fire Tests with Door Assemblies". The hourly rating qualification is also noted.



#### **Electrified Option**

This product is available with electrification option.



## **Hollow Metal**

This product suitable for hollow metal doors.



#### Grade 1

This product tested and certified to applicable ANSI/BHMA Grade 1 standard.



#### **Pullman**

Rim exit latch style that swings back at an angle to fully retract into the device as the pushbar is decressed.



#### Wood

This product suitable for wood doors.



#### **Burglary Listed**

Products with a UL 1034 listing are compliant as burglary resistant electric locking mechanisms.



## Interlock

A uniquely-shaped rim exit bolt design that interlocks the door to the frame for enhanced strength and durability.



#### Sliding Door

This product suitable for sliding doors.



#### **Outdoor Rated**

Product has been tested and shown to comply to UL1034, including the "Outdoor Equipment Use" section.



# MS<sup>®</sup> Prep

The MS® Prep is the industry standard lock prep and dominant locking solution for aluminum openings.



# **Swinging Door**

This product suitable for swinging doors.



#### **Preload**

This product capable of opening under load as defined by applicable ANSI/BHMA standards.

# Comprehensive Training Opportunities

ASSA ABLOY offers comprehensive training classes available to anyone wishing to learn about Doors & Hardware, Access Control, Key Systems and much more. Courses and lessons can be taken online or in-person at our training centers.

We offer curriculum reviewing everything from basic doors and hardware knowledge to complex IP Enabled and Access Control solutions. Opportunities for applying hands-on training with classroom instruction provide students with real world scenarios. Online courses are convenient for the busy professional.

Find a workshop to meet your needs – the University is open for self enrollment now. Registration for many of the online training modules is free.

adamsrite.com/en/training



# Limited Warranty

Adams Rite warrants that its products sold under the Adams Rite brand in the United States of America are warranted free from defects in workmanship and materials under normal use and service. This warranty does not cover defects or damage arising from improper installation, lack of or improper maintenance, improper storage, shipping and handling, corrosion, erosion, ordinary wear and tear, misuse, abuse, accident, unauthorized service, or use with unauthorized non-Adams Rite products or parts. This warranty is void if any modification is made to the product, regardless of whether the modification causes or contributes to the alleged defect. All modifications are made at the risk of the party making the modification.

Should any defect of manufacture (in material or workmanship) occur in its products, Adams Rite, upon prompt notification and proof to its satisfaction that the product was defective in manufacture for the use intended by Adams Rite, will at its option, exchange the product, repair the product, or refund the price charged by Adams Rite, FOB factory within the stated time frame listed below.

- 10 years on all mechanical products from the date of manufacture
- 5 years on the following electromechanical product categories from the date of manufacture, deadlocks, dead latches, exit devices\*, electric strikes, trims, power supply & accessories
  - \* NOTE: The MLR option (motorized electric latch retraction) is suported by a 1-year electro mechanical warranty. When powered by an Adams Rite PS-EXIT power supply the 1-year warranty is upgraded to 5 years
- 3 years on the following access control products from the date of manufacture, RT1050, 3090-150.

THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES. TO THE EXTENT PERMITTED BY LAW, ALL IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THIS WARRANTY. ADAMS RITE IS A DIVISION OF HANCHETT ENTRY SYSTEMS, INC. HANCHETT ENTRY SYSTEMS, INC. HANCHETT ENTRY SYSTEMS, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

#### Terms & Conditions

PRICES: All prices are subject to change without notice. Prices listed on the Adams Rite website will serve as the most current list price. All shipments will be made at prices in effect at the time of order. The customer shall be responsible for payment of all applicable sales and/or use taxes and freight costs.

MINIMUM ORDER: Minimum product charge per invoice is \$150.00 USD.

PAYMENT TERMS: Net thirty (30) days from date of invoice. Interest at the rate of up to 1-1/2% per month may be charged on all past due accounts. An order received on an account which has not been paid within 45 days of the date of invoice may not be processed until the account is current. Custom orders may require a deposit.

**DELIVERY TERMS:** All prices are Ex-works factory. Purchaser assumes the risk of loss or damage to the goods while in transit from the point of shipment. Adams Rite reserves the right to make delivery in installments.

Installments shall be separately invoiced and paid for when due. Delay in delivery of an installment shall not relieve the purchaser of its obligation to accept remaining deliveries.

FREIGHT POLICY: All Purchase Orders received with a minimum net value of \$ 3,500 will qualify automatically for free standard freight within the continental United States. This minimum amount applies per Purchase Order to qualify and does not include free expedited freight. Qualified orders may ship partial or ship complete at your preference. Qualified orders that ship partial will not incur freight charges. All shipments that do not qualify for free freight will be charged for freight based upon our terms in effect at the time of shipment. Customers may provide their own carrier account number for expedited freight methods or for any Purchase Order to be used to cover freight costs. Minimum amounts are subject to chance without notice.

SHORTAGE: Any claim for shortages must be made to Adams
Rite in writing within one (1) week of receipt of merchandise.

WARRANTY RETURNS: A Customer Care Form (CCF) for defective product must be obtained from Alarm Controls before any merchandise can be returned. CCF's are valid for sixty (60) days from date of issuance Goods returned under the terms of Adams Rite Warranties may require a copy of the original involve.

RETURNS: A Customer Care Form (CCF) must be obtained from Adams Rite before any merchandise can be returned. CCF's are valid for sixty (60) days from date of issuance. Items returned are subject to restocking fees.

CANCELLATIONS: Any order may be subject to a 5% cancellation charge for catalog items. Cancellation of non-catalog or custom items will be subject to a 20% cancellation charge plus all costs (both direct and indirect) incurred by manufacturing at the point of cancellation that are properly allocated to the cancelled item(s).

LIMITATION OF LIABILITY: Neither party will be liable to the other for any delay or failure in performance arising directly out of war, sabotage, insurrection, riot, and any other act of civil disobedience, act of public enemy, fire, explosion, flood, storm, or other act of God or nature, or similar cause beyond its reasonable control, including shortage or unavailability of labor or materials. If, notwithstanding the foregoing limitations, Adams Rite has any liability to the purchaser, the purchaser agrees that the total liability to the purchaser for all losses, damages, and causes of action, whether in contract, equity, tort (including without limitation, negligence and gross negligence), or otherwise, will not exceed the amount the purchaser paid to Adams Rite for the products (including, without limitation, incidental or consequential damages, damages for lost profits or business interruption, and punitive damages).

NO THIRD PARTY LIABILITY: If the purchaser uses the Adams Rite Products on behalf of others or provides to others any products referenced herein, the Adams Rite Parties shall have no liability to such persons whatsoever, and the purchaser agree to defend and indemnify the Adams Rite Parties from any and all claims and demands asserted against them, and from any legal fees, costs and other expenses that the Adams Rite Parties incur therewith.

**EXPORT CONTROL AND SANCTIONS:** The Customer represents and warrants to Adams Rite that it will always act in compliance with Economic Sanctions and Export Control Laws, and that:

- a. neither the Customer, its affiliates, or any of their respective directors, officers, employees nor, so far as the Customer is aware, any agents or other persons acting on behalf of any of the foregoing:
  - i. is, or has been, a Listed Person;
  - has engaged in any business dealings or activities that would reasonably be expected to result in it becoming a Listed Person;
  - directly or indirectly, has conducted or is conducting any business dealings or activities with or for the benefit of, or is otherwise involved in any business with a Listed Person, or otherwise acting in violation of Economic Sanctions and Export Control Laws;

- iv. has engaged or is engaging in any transaction that circumvents, evades or avoids, or has the purpose or effect of circumvention, evading or avoiding, or attempts to violate, any Economic Sanctions and Export Control Laws; or
- i. is, or has been, in violation of, or subject to, any investigation or enquiry by, or on behalf of, any governmental or other regulatory body relating to Economic Sanctions and Export Control Laws.
- the Customer shall act in compliance with Economic Sanctions and Export Control Laws, and shall not sell nor re-export the Product without all requisite licenses and approvals under Economic Sanctions and Export Control Laws;
- the Customer shall not sell, export or re-export, the Product, directly or indirectly, to the Russian Federation or Belarus or for use in the Russian Federation or Belarus (whether or not permitted under Economic Sanctions and Export Control Laws applicable to the Customer);
- d. the Customer shall undertake its best efforts to ensure that the purpose of this Clause is not frustrated by any third parties further down the commercial chain, including by possible resellers;
- e. the Customer agrees to (i) cascade the contractual obligations set forth in this Clause. in contracts with third parties, including possible resellers, further down the commercial chain.; and (ii) set up and maintain an adequate monitoring mechanism to detect conduct by any third parties further down the commercial chain, including by possible resellers, that would frustrate the purpose of this Clause;
- f. the representations and warranties set forth in this Clause shall always remain true and correct;
- g. the Customer will provide written notice to Adams Rite as promptly as possible and in any event within five business days, if (i) any representation or warranty should cease to be true at any time., or (ii) the Customer should encounter any problems in applying Clauses b)- e), above, including any relevant activities by third parties that could frustrate the purpose of said clause: and
- h. the Customer will not engage in any transaction for Military End-Use unless explicitly approved by Adams Rite.
- The Customer will provide all information relating to requests for Products, that the Customer suspects could violate or circumvent Economic Sanctions and Export Control Laws, including requests from or on behalf of a Listed Person, and other attempts to acquire Adams Rite products in violation of Economic Sanctions and Export Control Laws. The Customer will, to the best of its abilities, cooperate with Adams Rite to facilitate compliance with Economic Sanctions and Export Control Laws and will upon Adams Rite's request provide Adams Rite with true, complete and correct copies of all documentation relating to any business dealings involving the Product, including but not limited to, end-user certifications, information concerning compliance with the obligations under Clause, b)- e), and other information as may be required by Adams Rite within two weeks of the simple request of such information

Adams Rite shall not be obliged to make any payment or take any other action if Adams Rite believes in good faith that such action may constitute a violation, contribute to a violation, or constitute a circumvention of any Economic Sanctions and Export Control Laws.

#### COMPLIANCE WITH ANTI-TRUST, ANTI-CORRUPTION AND DATA PRIVACY LAWS: The

Customer, its directors, officers, and employees shall perform their obligations under these Terms and Conditions in full compliance with the ASSA ABLOY Code of Conduct which is accessible online at: https://www.assaabloy.com/group/en/sustainability/code-of-conduct/business-partners







The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

# USA

800.626.7590 | f: 800.232.7329 | adamsrite.com

customerservice.adamsrite@assaabloy.com techsupport.adamsrite@assaabloy.com orders.adamsrite@assaabloy.com

# Canada

800.461.3007 | f. 800.461.8989 | assaabloydss.ca

sales.dss.ca@assaabloy.com orders.dss.ca@assaabloy.com

adamsrite.com