



ASSA ABLOY

Experience a safer
and more open world



GL Series Cylindrical Lever Locks



Features:

Housing – Interlocking lever tubes are made from dichromate plated steel. The tubes are attached to the rose insert. This offers fantastic support for a ridged feel without excess movement. Standard bearing sleeves used on most other Arrow lever series are not used on the GL.

Requires standard 2-1/8" (54mm) bore through door.

Thru-Bolts – Removable thru-bolts standard on GL Series.



OverDrive™ will allow a locked lever to rotate freely without retracting the latch, improving the life and performance of Arrow locksets.

OverDrive™ – Freewheeling lever action occurs when latch retraction mechanism disengages from lever handle when handle is locked. Built-in stops in the rose insert prevent lever from traveling beyond approximately 70 degrees.

Backset – 2-3/4" (70mm) standard. See price book for alternate backsets.

Latch – Stainless Steel with 1/2" (13mm) throw standard. Latch housing is steel, zinc dichromate finish for corrosion resistance. 1" (25mm) bore in edge of door is required.

Latch Front – Stainless steel. 2-1/4" (57mm) x 1-1/8" (29mm), 1/8" (3mm) in 2" (51mm).

Exposed Trim – Levers are pressure cast zinc. Streamline rose scalp of stainless-steel complements.

Rose Inserts – Contain coil spring which is a permanent assembly within rose insert. Inside and outside rose scalps are retained by dimples that create an interference fit with the rose inserts. There are no special retention features added to the rose insert that align the scalp.

Strikes – Stainless steel. ANSI A115.2, 4-7/8" (124mm) x 1-1/4" (32mm) curved lip strike standard.

Door Thickness – 1-3/8" (35mm) to 2" (51mm).

Handing – Non-handed. Levers operate bi-directionally.

Finishes – US26D.

Packaging – 1 per box, 6 per case.

Warranty – Limited five year warranty.

Finishes:

Arrow Code	BHMA	U.S. Equiv.	Finish Description
626	626	US26D	Satin Chromium Plated



Arrow GL Series Grade 1 heavy duty levers offer an economically pleasing solution for ADA compliance. The GL solution is designed with the installer in mind, providing fewer subcomponents to allow for an easier to install system. Simply put, the GL Series will be your number one choice when economy is your first priority.

ADA/Americans with Disabilities Act:

Acceptable Door Hardware: Section 4.13.9

Handles, pulls, latches and other operating devices on accessible doors shall have a shape that is easy to grasp with one hand and does not require grasping, tight pinching or twisting of the wrist to operate. Lever operated mechanisms, push-type mechanisms and "U" shaped handles are acceptable designs.

Look for the universal symbol next to Arrow products that comply with ADA accessibility requirements.



Certification & Compliance:

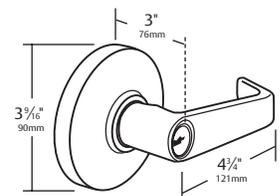


All Arrow GL Series locks are UL/cUL listed for use on 3 hour, A label or lesser doors and are certified to conform to the requirements of ANSI/BHMA A156.2, Series 4000, Grade 1.

- ANSI A117.1 Accessibility Code
- California State Reference Code for levers returning to within 1/2" (13mm) of door surface

Design:

Sierra - SR



WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

Interchangeable Core:








- Look for these symbols to indicate when product is available in either large or small format interchangeable core.

Cylinders:

Conventional – GL Series locksets are supplied standard with solid brass 6-pin cylinders pinned in all 6 chambers with two nickel silver keys. The Arrow AR keyway is standard with optional keyways the Arrow sectional keyways and Schlage Cs keyway. Keyed different is the standard with keyed alike, O-bit, and master keying available.

- Cylinder Options** – Interchangeable core – lockset prepared for use with 6 or 7 pin interchangeable core. Supplied less core, tailpiece built into the rose assembly and is non-removeable. Suffix “IC” to request Small Format Interchangeable Core prep.

Functions:

ARROW STANDARD	ARROW OVERDRIVE™	ANSI	FUNCTION	DESCRIPTION
GL01		F75	Passage	 Latchbolt operated by lever either side.
GL02		F76	Privacy	 Latch operated by lever either side except when outside lever is locked by pushing inside button. Outside lever unlocked by turning inside lever, using emergency key, or closing door. Inside lever always operates latch.
GL08			Single Dummy Trim	 Rigid trim for one side of door only. Used as pull or to match active trim.
GL81		F109	Entrance/ Office	 Dead locking latch bolt operated by lever from either side except when outside lever is locked by pushing turn button inside. Key outside or operating inside lever releases turn button unlocking outside lever except when turn button had been rotated to keep outside lever locked. Inside turn button must be manually operated to unlock outside lever. Inside lever always operates latch bolt.
GL82		F86	Storeroom	 Latchbolt operated by key in outside lever or by inside lever. Outside lever is always inoperable.
GL87		F84	Classroom	 Latchbolt operated by lever either side except when key outside locks outside lever. Inside lever always free. Key outside locks/unlocks outside lever only.
GL97		F110	Intruder Classroom	 Deadlocking latch bolt operated by lever from either side. Key either inside or outside locks or unlocks outside lever. Inside lever always operates latchbolt.



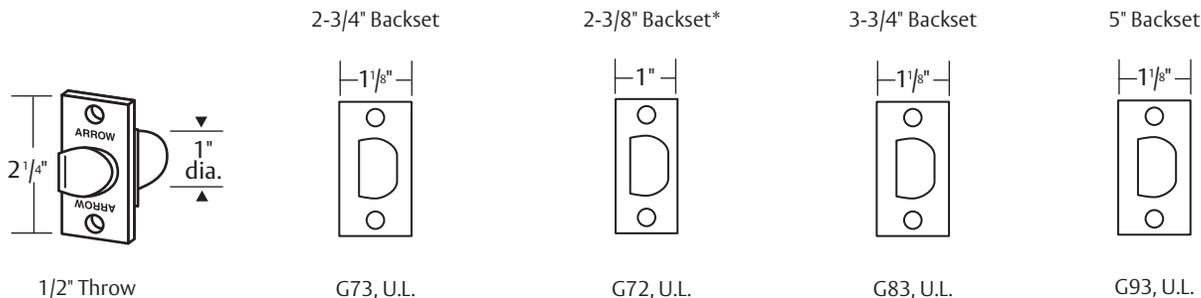
This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

GL Series Cylindrical Lever Locks




ASSA ABLOY


Spring Latches:



Dead Latches:

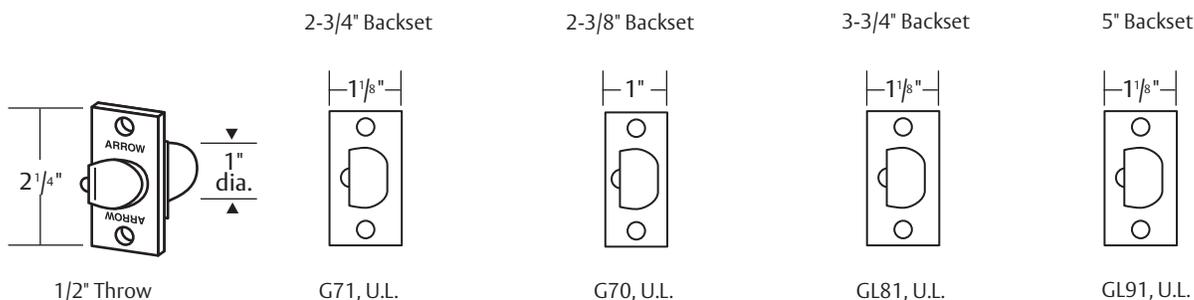

Strikes:

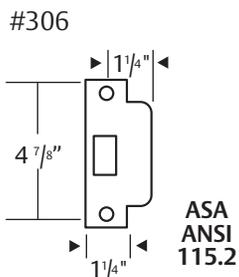

*Available as a separate component. See price book for 3-3/4" and 5" back set latches.

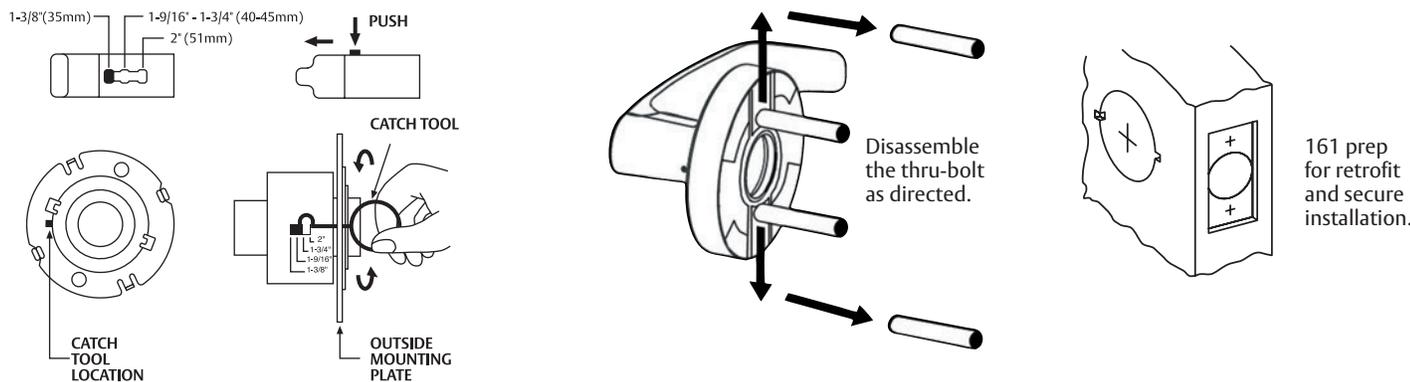
GL Series Cylindrical Lever Locks



ASSA ABLOY

Installation:

Adjustable Mounting Plate



Suggested Specification:

All locksets shall be GL Series Cylindrical locksets as supplied by Arrow Lock company.

Locksets shall meet ANSI/BHMA requirements for Series 4000, Grade 1, and shall be U.L. and c.U.L. listed for 3 hour, A label openings. Lockset conforms to ANSI A117.1 for barrier-free accessibility, and the California State Reference Code (formerly Title 19, California State Fire Marshall Standard).

Lockset shall be non-handed and no exposed screws. Chassis mounting screws may be accessed only when lever and rose are removed.

Inside and outside rose inserts shall have independent heavy strength coil springs allowing lever handle to move bi-directionally.

Lockset shall be equipped with OverDrive™, freewheeling feature whereby the latch retraction mechanism disengages from the lever handle allowing lever to move freely when locked, without retraction the latch. A built in stop in the rose insert shall prevent lever from travelling beyond approximately 70 degrees.

Lever trim shall consist of cast levers with wrought brass or bronze rose scalps. Levers shall be a minimum of 4-5/8" in length and where applicable shall return to within 1/2" of the door surface.

Disassembly of lockset for cylinder removal shall not be required. Cylinder shall be changed by removing the lever.

All products shall be of one manufacturer.

All locksets shall carry a five year limited warranty.

Ordering Example:

Example: To order a GL Series classroom function lockset with a Sierra design lever, satin chrome finish, with an ASA strike and 2-3/4" backset, keyed different:

Specify:

Series	Function	Design	Finish	Strike	Latch	Keying	Options (if required)
GL	87	SR	26D	306	G71	KD	XXX

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.



ASSA ABLOY

Arrow Lock & Door Hardware
225 Episcopal Road
Berlin, CT 06037
Customer Service: 1-800-327-8539
Technical Product Support: 1-800-327-8539 X2
www.arrowlock.com