



PRODUCT CATALOG

SUMMER 2024 EDITION





LZR®-FLATSCAN 3D SW

FOUR CURTAIN STAND-ALONE, DOOR-MOUNTED SAFETY SYSTEM WITH VIRTUAL PUSH BUTTON FUNCTIONALITY

[READ MORE ON PAGE 27](#)



Three-Dimensional Field Coverage

3D detection field guaranteeing full-safety coverage of the opening area



LASER-based Technology

Capable of ignoring dynamic ground conditions (reflective flooring, pedi-mats, wet surfaces, etc.)



Completely Touchless

For germ-free activation, program up to two Virtual Push Buttons

EXCEEDING ANSI 156.19

REACTIVATION

Complete door coverage with LZR-FLATSCAN 3D SW LASER-based sensor



PRIMARY ACTIVATION

Push plate, touchless swirch, or radio controls



ADDITIONAL ACTIVATION

Utilize Virtual Push Buttons in addition to a knowing-act device





BEA AMERICAS

RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213



800 523 2462



info-us@BEAsensors.com

TABLE OF CONTENTS

TECHNOLOGIES	5
FIND YOUR APPLICATION	7
FIND YOUR SOLUTION	9
PRODUCTS	11
INDEX	109



TECHNOLOGIES

LASER


Laser technology works according to the principle of Time-of-Flight. The sensor sends an intense light impulse in a defined direction and measures the time until the signal returns. As the speed of light is a constant value (approximately 300,000 km/s), this time is directly proportional to the distance between the sensor and the first object encountered by the light impulse.

As a result, and by sending multiple beams in multiple directions (2D or 3D), the sensor is capable of knowing the exact position of any object in its detection area at any given time.



ACTIVE INFRARED WITH BACKGROUND ANALYSIS

Active infrared with background analysis technology works with a background (e.g. a sensor shines infrared light on the floor). In this case, the sensor lights up one or more areas and analyzes the energy that returns. Detection is triggered if there is any significant difference when compared to the original picture.



ACTIVE INFRARED WITH BACKGROUND SUPPRESSION

Active infrared with background suppression technology works on the principle of "triangulation" in which the sensor calculates the distance between the emitter and receiver. The emission angle is already known and the reflection angle becomes the key element as the distance to the object can be calculated according to the position of the reflected spot on the receiver side (a triangle can be drawn when you know one distance and two angles).



PASSIVE INFRARED

Passive infrared technology measures the infrared light radiating from objects in its field of view. Motion or presence is detected when an infrared source with one temperature, such as a human being, passes in front of an infrared source with another temperature, such as the normal environment.



RADAR

Radar technology, also known as microwave technology, is based on the Doppler Effect: the radar sensor continuously emits microwaves with a certain frequency in a defined area. These microwaves are reflected back to the sensor by all of the objects present in its environment.



PIEZO

Piezo technology, also known as piezoelectric, is the process of converting mechanical pressure (pushing a button) into electrical energy. A piezo switch is paired with a field effect transistor (FET) that, when pushed, allows current to flow through the FET.



RADIO CONTROL FREQUENCY

Radio control frequency wireless technology uses transmitters and receivers operating on specific radio frequencies. The transmitter applies a radio frequency alternating current to an antenna, which then radiates radio waves. The receiver receives the transmitted frequency and converts the information into a usable form.



VIDEO

Video technology uses optics and light to create pictures and videos. Enhanced definition cameras capture door environment and traffic usage in full color and high quality. Cameras are used within sensors to increase security and decrease liability.



FIND YOUR APPLICATION


PEDESTRIAN ENTRANCE SENSORS

Pedestrian Entrance Sensors are designed to improve the flow of people moving in, out and through a building. These solutions maximize safety and accessibility in retail centers, airports, hospitals, educational facilities, offices and other areas with consistent pedestrian-based traffic. Security and Access Control solutions are designed to control access, provide security and streamline workflow in and around buildings. Sensing solutions found within this segment pair seamlessly with door controls and security systems to help maximize safety and security.


DOORS & WINDOWS




LOW ENERGY
DOORS




SLIDING
DOORS



SWINGING
DOORS



REVOLVING
DOORS



AUTOMATED
WINDOWS



KNOWING ACT
DEVICES

SECURITY & ACCESS CONTROL




SPEED LANES
AND TURNSTILES



REQUEST-
TO-EXIT



ACCESS
CONTROL



ESCALATORS

INDUSTRIAL DOOR & GATE SENSORS

Industrial Door & Gate Sensors can be found in warehouses, distribution centers, delivery bays, docks and other areas needing to effectively manage industrial traffic. These solutions include sensors, signal lights and other devices dedicated to improving traffic flow and protecting resources. Common applications include sensors designed for the activation and safety of high performance doors.

DOORS



HIGH PERFORMANCE
DOORS



COMMERCIAL
DOORS



LOADING
DOCKS

GATES & BARRIERS



GATES



BARRIERS


FACTORY & LOGISTICS AUTOMATION SOLUTIONS

Factory and logistic automation solutions are dedicated to applications that ensures the safety and protection of people, equipment and mobile robots in the industrial environments, including factories, warehouses, etc.


AUTONOMOUS ROBOTS



AUTOMATED GUIDED VEHICLES



AUTONOMOUS MOBILE ROBOTS



AUTOMATIC FORKLIFT


TRAFFIC & TRANSPORT SOLUTIONS



PARKING SOLUTIONS



TRAFFIC & TOLL GATES



TRAIN, TRAM & SUBWAY DOORS



BUS DOORS



PLATFORM SCREEN DOORS




WAREHOUSING

ASSET PROTECTION



ARTWORK PROTECTION



PERIMETER PROTECTION

FIND YOUR SOLUTION

MOTION SENSORS

COLIBRI	11
EAGLE ARTEK	12
FALCON FAMILY	13
FALCON EX FAMILY	14
PHOENIX EX™ FAMILY	15
SPARROW	16

PRESENCE SENSORS

BODYGUARD-T	17
FLY KIT	18
FOCUS FAMILY	19
IS40P	20
IXIO-ST	21
IXIO-ST INDUSTRIAL	22
LZR®-FLATSCAN S	23
LZR®-FLATSCAN W	24
LZR®-FLATSCAN SW	25
LZR®-FLATSCAN 3D SW	27
LZR®-I30	29
LZR®-MICROSCAN T	30
LZR®-S600	32
MICROCELL ONE	33
R2E-100	34
SUPERSCAN-T	35
SUPERSCAN-T INDUSTRIAL	36

MOTION + PRESENCE SENSORS

BEAMBOX	38
IS40 / IS40 XL	41
IXIO-DT1	42
IXIO-DT1 INDUSTRIAL	43
IXIO-DT1 V	44
LZR®-H100	28
LZR®-WIDESCAN	47
ULTIMO	48

RAW DATA SENSORS

LZR®-U920 / U921	49
------------------	----

LOGIC MODULES

BR2-900	51
BR3-X	52
LOCK-OUT MODULES	53

LOOP DETECTORS

MATRIX FAMILY	54
---------------	----

WIRELESS

300 MHZ FAMILY	55
433 MHZ FAMILY	56
900 MHZ FAMILY	57
BR2-900	51
PANTHER	64

PUSH PLATES

4.5 INCH, ROUND AND SQUARE	59
4.75 INCH, SQUARE	60
6 INCH, ROUND AND SQUARE	61
JAMB	62
LPR36	63
PANTHER	64
SINGLE GANG	65
VESTIBULE	66

TOUCHLESS SOLUTIONS

MS09	68
MS31	69
MS41	71
MS51	72
MS51W	73
MAGIC SWITCH MOUNTING BOXES	74

ACCESS CONTROL

ACCESS CONTROL PUSH BUTTON	76
BR3-X	52
CABINET LOCK	77
DELAYED EGRESS MAGLOCK KIT	78
ELECTRIC STRIKES	79
FLY KIT	18

KEYSWITCHES	81	PUSH PLATE 475S-433	98
PIEZO BUTTON	82	PUSH PLATE 475S-900	98
PNEUMATIC PUSH BUTTONS	83	PUSH PLATE 475S-BR2900	98
UL LISTED GATELOCKS	84	PUSH PLATE 475S-HW	98
MAGLOCKS	74, 89	PUSH PLATE 6R-433	98
MAGLOCKS WITH DS	88, 90	PUSH PLATE 6R-900	98
UNIVERSAL KEYPAD FAMILY	91	PUSH PLATE 6R-BR2900	98
LZR®-S600	32	PUSH PLATE JAMB-433	98
		PUSH PLATE JAMB-900	98
		VESTIBULE PACKAGE 433	98
		VESTIBULE PACKAGE 900	98
INDICATORS		REQUEST-TO-EXIT	
LED SIGNAL COLUMN LIGHTS	92	10ACP6DS	99
LED SIGNAL MODULAR LIGHTS	93	10ACP6FDS	99
LED SIGNAL TRAFFIC LIGHTS	94	10ACP12DS	99
		10ACP12FDS	99
PACKAGES		SINGLE OCCUPANCY RESTROOM	
ACCESS CONTROL		EMERGENCY ADD-ON KIT	100
10ACP6	95	RESTROOM KIT	101
10ACP6F	95	SWING DOORS	
10ACP12	95	PARALLAX I	102
10ACP12F	95	PARALLAX II	102
LOW-ENERGY REACTIVATION		PARALLAX DE	102
LE PACKAGE	96	PARALLAX II DE LITE	102
LE PACKAGE 6	96	ACCESSORIES	
LE PACKAGE 6 SECURITY	96	BOLLARDS	103
PUSH PLATE		MOUNTING BOX EBA	104
PANTHER 1	97	DOOR PRESSURE GAUGE	105
PANTHER 2	97	ISOLATION RELAYS	105
PUSH PLATES 1	97	MAGNETIC, DOOR POSITION SWITCH	105
PUSH PLATES 2	97	ON / OFF / HOLD OPEN SWITCH	105
PUSH PLATES 3	97	SPOTFINDER	105
PUSH PLATES 4	97	UNIVERSAL REMOTE CONTROL	105
PUSH PLATES 45	97	JAMB CAM	106
PUSH PLATES 45 900	97	POWER SUPPLIES & TRANSFORMERS	107
VESTIBULE 900	97		
VESTIBULE PACKAGE	97		
VESTIBULE PACKAGE 9V	97		
SECURITY PUSH PLATE			
PUSH PLATE 45S-433	98		
PUSH PLATE 45S-900	98		
PUSH PLATE 45S-BR2900	98		
PUSH PLATE 45S-HW	98		
PUSH PLATE 475 EBA-900	98		



COLIBRI ONE


UNIDIRECTIONAL MOTION SENSOR FOR OFF-DOOR APPLICATIONS

Customizable Settings

Variable sensitivity adjustment provides different detection areas

Variable Mounting

Lateral angle adjustment for ceiling-, wall-, and low-level mount versatility

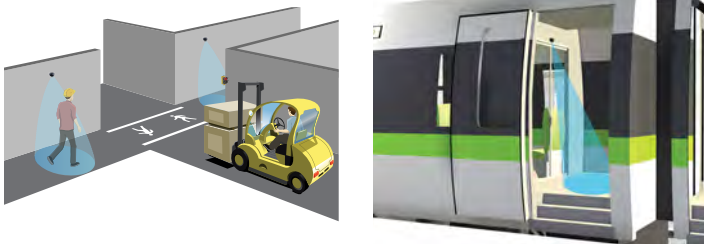

Compact, Low Profile

Compact size provides flexibility in mounting

Ideal For Off-Door Applications

Pairs with LED SIGNAL LIGHTS for warning indication applications



TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Detection Mode	Motion
Transmitter Frequency	24.150 GHz
Transmitter Radiated Power	< 20 dBm EIRP
Transmitter Power Density	< 5 mW / cm ²
Min. Detection Speed	2 in/s (measured in sensor axis)
Supply Voltage	12 – 24 VDC 30% / -10%
Mains Frequency	50 – 60 Hz
Max. Power Consumption	< 2 W
Output	Solid-state-relay (free of potential change-over contact)
Max. Contact Current	100 mA
Max. Contact Voltage	35 VDC / 24 VAC
Mounting Height	6 – 10'
Degree of Protection	IP54
Temperature Range	-4 – 131 °F
Dimensions	3 1/8" (W) x 2 3/8" (H) x 2 1/8" (D)
Tilt Angles	0 – 90° vertical; -30 – 30° lateral
Materials	ABS, PC
Weight	5 oz
Cable Length	8'
Norm Conformity	R&TTE 1999 / 5 / EC EMC 2004 / 108 / EC

PRODUCT SERIES

10COLIBRI1

Motion sensor



EAGLE ARTEK

COMPACT, MOTION SENSOR FOR AUTOMATIC DOORS



Compact and Attractive Design

Slim and compact design permits integration with all types of automatic door operators

Energy Efficient


Immunity Filter, Field Size, and Field Shape settings work together with direction sensing capability (Detection Mode) to reduce door open time

Easy to Use

Electronic management of the radar field shape and push-button adjustments allow for quick installation and setup

Easy to Retrofit

Same mounting references and plug-in interface accessory make it easy to retrofit EAGLE



TECHNICAL SPECIFICATIONS

Technology	Microwave
Detection Mode	Motion
Transmitter Frequency	24.15 GHz
Transmitter Radiated Power	< 20 dBm EIRP
Transmitter Power Density	< 5mW / cm ²
Max. Detection Range	wide: 13' x 6.5' narrow: 6.5' x 7' (@ 7' high)
Min. Detection Speed	2 in/s
Supply Voltage*	12 – 24 VAC ±10% (50 – 60 Hz) 12 – 24 VDC 30% / -10%
Max. Power Consumption	< 1 W
Output*	Solid-state Relay (Free of Polarity)
Max. Switching Voltage	30 VAC / 42 VDC
Max. Switching Current	100mA (Resistive)
Mounting Height	6 – 13'
Tilt Angles	0 – 90° vertical -30 – 30° lateral
Temperature Range	-4 – 131 °F (-20 – 55 °C)
Dimensions	4.72" (L) x 1.96" (H) x 1.96" (W)
Material	ABS
Weight	120 g
Cable Length	8'
Degree of Protection	IP54
FCC Certification	FCC: G9B-100606 IC: 4680A-100606

PRODUCT SERIES

10EAGLEARTEK	Microwave motion sensor
10EARA	Rain accessory
10EACA	Ceiling accessory (white)
10EACA-BLK	Ceiling accessory (black)
10EABA	Bracket accessory
35.0303	Replacement cover (black)
35.0319	Replacement cover (white)
35.0320	Replacement cover (silver)
10EARETROFIT	Retrofit interface
10REMOTE	Universal remote control for sensor setup



FALCON FAMILY

MOTION SENSOR FOR INDUSTRIAL DOORS,
GATES, AND WARNING INDICATION

Energy Savings



Bidirectional + unidirectional approach and unidirectional depart microwave detection options

Adjustable Detection Settings

Six modes of detection filtering for pedestrian and parallel traffic rejection

Adjustable Angle

Tilt angle from zero to 180°

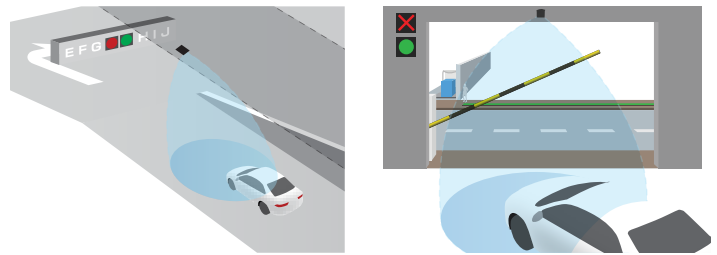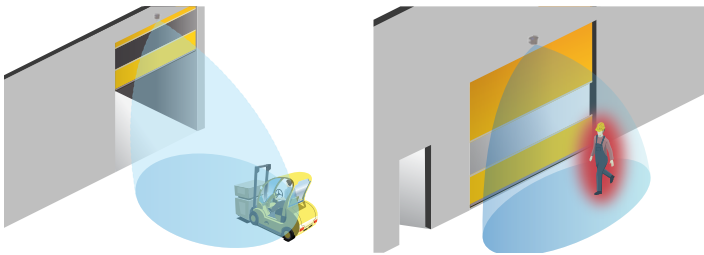

Remote Control Adjustments

Remote control programming enables user to quickly and safely make changes from the ground

Rated For Harsh Environments

IP65-rated enclosure

TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Radiated Frequency	24.150 GHz
Transmitter Radiated Frequency	< 20 dBm EIRP
Radiated Power Density	< 5 mW / cm ²
Detection Mode	Motion
Detection Zone	
FALCON	13' × 16' at 16'
FALCON XL	13' × 6 1/2' at 8 1/2'
FALCON WIDE	30' × 11' at 21'
	Typical at 30° and field size 9
Tilt Angles	0 – 180°
Output	Relay (free of potential change-over contact)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC); 60 VA (AC)
Minimum Detection Speed	2 in/s*
Mains Frequency	50 – 60 Hz
Supply Voltage	12 – 24 VAC; ±10% 12 – 24 VDC; 30% / -10%
Power Consumption	< 2 W
Mounting Height	
FALCON	11 1/2 – 23'
FALCON XL	6 1/2 – 11 1/2'
FALCON WIDE	11 1/2 – 21'
Dimensions	3 3/4" (W) × 4" (H) × 5" (L)
Materials	ABS, PC
Temperature Range	-22 – 140 °F
Degree of Protection	IP65
Norm Conformity	EMC: 2004 / 108 / EC R&TTE: 1999 / 5 / EC

* Measured in optimal conditions

PRODUCT SERIES

10FALCON	Industrial motion detector (11 1/2 – 23' high mount)
10FALCONW	Industrial motion detector with wide detection fields (11 1/2 – 21' high mount)
10FALCONXL	Industrial motion detector for low mounting (6 1/2 – 11 1/2' high mount)
10INDBRACKET	Industrial mounting bracket
10MINIBRACKET	Short, adjustable mounting bracket
10WBA	Universal mounting bracket arm
10WBAMOUNT	Universal mounting bracket plate
10REMOTE	Universal remote control for sensor setup
20.5365	FALCON harness (100')
35.1568	FALCON harness (30')



FALCON EX FAMILY

MOTION SENSOR WITH EXPLOSION-PROOF AND FLAME-PROOF HOUSING




Energy Savings

Bidirectional + unidirectional approach and unidirectional depart microwave detection options

Adjustable Detection Settings

Six modes of detection filtering for pedestrian and parallel traffic rejection

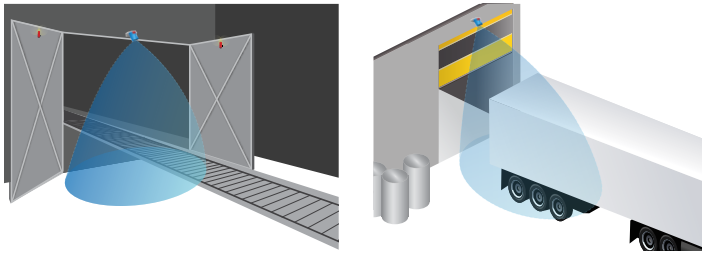


Easy to Program

Remote control programming enables user to quickly and safely make changes from the ground

Explosion-proof and Highly Durable

Explosion-proof and flame-proof housing weighs 11 pounds

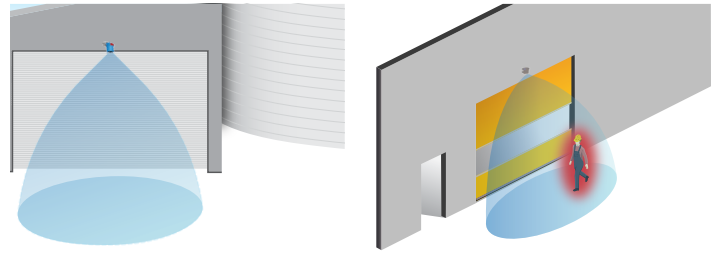

TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Radiated Frequency	24.150 GHz
Transmitter Radiated Frequency	< 20 dBm EIRP
Radiated Power Density	< 5 mW / cm ²
Detection Mode	Motion
Detection Zone	
FALCON EX	13' x 16' at 16'
FALCON EX XL	13' x 6½' at 8½'
FALCON EX WIDE	30' x 11' at 21'
	Typical at 30° and field size 9
Tilt Angles	-90 – 30° in elevation
Output	Relay (free of potential change-over contact)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC); 60 VA (AC)
Minimum Detection Speed	2 in/s
Mains Frequency	50 – 60 Hz
Supply Voltage	12 – 24 VAC; ±10%
	12 – 24 VDC; 30% / -10%
Maximum Power Consumption	< 2 W
Mounting Height	
FALCON EX	11 ½ – 23'
FALCON EX XL	6 ½ – 11 ½'
FALCON EX WIDE	11 ½ – 21'
Dimensions	
Housing and Bracket	5 ½" (L) x 7 ½" (W) x 9" (H)
Electrical Access	
NPT Pipe Thread	¾"
Weight	10 lbs
Cable Length	See User's Guide for reference
Materials	Copper-free Aluminum, Aluminum
Temperature Range	-22 – 140 °F
Housing Certification*	See User's Guide
Norm Conformity	EMC: 2004 / 108 / EC
	R&TTE: 1999 / 5 / EC

* Adalet / Scott Fetzer Co., UL Listing #E81696

PRODUCT SERIES

10FALCONEX100	Industrial motion detector with 100' harness (11 ½ – 23' high mount)
10FALCONEXW100	Industrial motion detector with wide detection fields and 100' harness (11 ½ – 21' high mount)
10FALCONEXXL100	Industrial motion detector for low mounting with 100' harness (6 ½ – 11 ½' high mount)
10INDBRACKET	Industrial mounting bracket
10REMOTE	Universal remote control for sensor setup
20.5365	FALCON harness (100')
35.1568	FALCON harness (30')



PHOENIX EX™ FAMILY



MOTION SENSOR WITH EXPLOSION-PROOF AND FLAME-PROOF HOUSING FOR INTRUSION PROTECTION

Energy Savings

Bidirectional + unidirectional approach and unidirectional depart microwave detection options

Tamper Proof

Integrated, tamper alert switch and end-of-line resistors




Certified Housing

Explosion-proof and flame-proof housing, weighs 10 pounds

Customizable Detection Angle

Tilt adjustment angle: -90 to 30° in elevation



TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Transmitter Frequency	24.150 GHz
Transmitter Radiated Power	< 20 dBm EIRP
Transmitter Power Density	< 5 mW / cm ²
Detection Mode	Motion
Output*	Relay (free of potential change-over contact)
Maximum Contact Voltage	42 VAC/DC
Maximum Contact Current	1 A (resistive)
Maximum Switching Power	30 W (DC); 60 VA (AC)
Anti-Tamper Feature	
PHOENIX EX	1) product anti-tamper (magnetic switch within cover, alerts when cover is unscrewed) 2) application-based anti-tamper (tamper alert via end-of-line resistor)
PHOENIX EX-IT	Tamper alert via output
Minimum Detection Speed	2 in/s*
Supply Voltage	12 – 24 VAC; ±10% 12 – 24 VDC; 30% / -10%
Mains Frequency	50 – 60 Hz
Maximum Power Consumption	< 2 W
Electrical Access	¾"
Cable Length	30' or 100' (default), diameter ¼" max
Detection Zone	
PHOENIX EX	13' x 16' at 16'
PHOENIX EX XL	13' x 16 ½' at 8 ½'
PHOENIX EX WIDE	30' x 11' at 21' Typical at 30° and field size 9
Mounting Height	
PHOENIX EX	11 ½' – 23'
PHOENIX EX XL	6 ½' – 11 ½'
PHOENIX EX WIDE	11 ½' – 21'
Dimensions	
Housing and Bracket	5 ½" (H) x 7 ½" (W) x 9" (L)
Weight	10 lbs
Temperature Range	-22 – 140 °F
Housing Certification***	See User's Guide
Norm Conformity	EMC: 2004 / 108 / EC R&TTE: 1999 / 5 / EC

PRODUCT SERIES

10PHOENIXEX100	Industrial motion detector with 100' harness (11 ½' – 23' high mount)
10PHOENIXEXXL100	Industrial motion detector for low mounting with 100' harness (6 ½' – 11 ½' high mount)
10PHOENIXEXW100	Industrial motion detector with wide detection fields and 100' harness (11 ½' – 21' high mount)
10PHOENIXEX-IT100	Industrial motion detector with 100' harness (11 ½' – 23' high mount)
10PHOENIXEXXL-IT100	Industrial motion detector for low mounting with 100' harness (6 ½' – 11 ½' high mount)
10PHOENIXEXW-IT100	Industrial motion detector with wide detection fields and 100' harness (11 ½' – 21' high mount)
10REMOTE	Universal remote control for sensor setup

Contact your BEA Sales Representative for PHOENIX EX™ ordering information

* Measured in optimal conditions

** Output ratings may vary depending on optional end-of-line resistor values

*** Adalet / Scott Fetzer Co., UL Listing #E81696



SPARROW

VARIABLE MOUNT, INDUSTRIAL MOTION SENSOR




Flexible Mounting

Mounting height from 6 ½ feet to 20 feet

Adjustable For Optimal Detection

Ten sensor-sensitivity settings can be applied to optimize detection

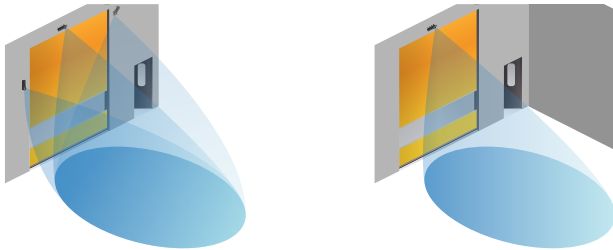


Weather Resistant

IP64-rated enclosure for industrial and harsh environments

Customizable Settings

Immunity settings can be adjusted to reduce unwanted detections caused by rain, snow, and header vibrations

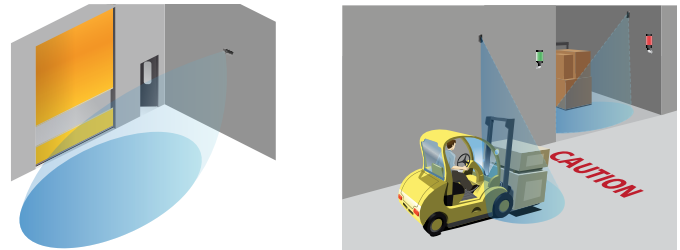

TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Transmitter Frequency	24.150 GHz
Transmitter Radiated Power	< 20 dBm EIRP
Transmitter Power Density	< 5 mW / cm ²
Detection Mode	Motion
Tilt Angle	0 – 90° vertical; -120 – 120° lateral
Output	Relay (free of potential change-over contact)
Max. Contact Voltage	42 VAC – 60 VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 60 VA (AC)
Minimum Detection Speed	2 in/s (measured in the sensor axis)
Frequency	50 – 60 Hz
Supply Voltage	12 – 24 VAC ±10% 12 – 24 VDC; 30% / -10%
Maximum Power Consumption	< 2 W
Mounting Height	6 ½ – 20'
Dimensions	5 ½" (L) × 2 ¼" (H) × 2 ½" (W)
Material	ABS
Color	Black
Weight	5.8 oz
Cable Length	30'
Temperature Range	-22 – 140 °F
Degree of Protection	IP64
Norm Conformity	R&TTE 1999 / 5 / EC EMC 2004 / 108 / EC

PRODUCT SERIES

10SPARROW	Variable-mount motion sensor
10REMOTE	Universal remote control for sensor setup
10INDBRACKET	Industrial mounting bracket



BODYGUARD-T

OVERHEAD PRESENCE SENSOR FOR AUTOMATIC DOORS

Overhead Presence Sensor


Versatile sensor can be used on single swing, simultaneous pair, dual egress, and folding doors when coupled with an interface / lockout device

Tailor For Application Needs

Adjustable tilt angle from zero to 10°

Visible Indication

Visible LED indicates connection between sensor and door control

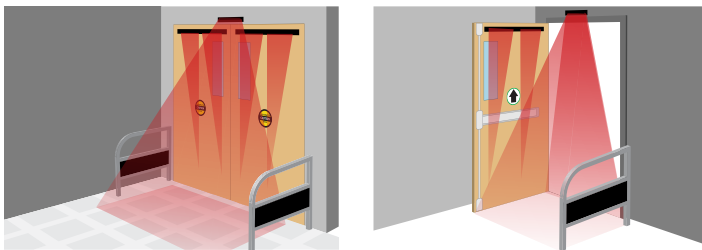

TECHNICAL SPECIFICATIONS

Technology	Active infrared
Detection Mode	Presence
Installation Height (variable)	9' 0" maximum (recommended: 6' 6" – 8' 0")
Mounting Angles	
BODYGUARD Only	5°, 10° (factory default setting: 5°)
With BODYMOUNT	0°, 5°, 10°
Power Supply	12 – 24 VAC/VDC ±10%
Frequency	50 – 60 Hz
Output	
Max. Contact Voltage	60 VDC / 125 VAC
Max. Contact Current	1 A
Max. Power Supply	30 W (DC), 60 VA (AC)
Relay Hold Time	0.5 – 9 s
Operating Temperature	-22 – 140 °F
Immunity	Immune to electrical and radio frequency interference
Cable	4'
Weight	1 lb 11 oz
Dimensions	12" (W) × 2" (H) × 2" (D)
Materials	Aluminum, ABS
Housing	Black anodized aluminum



Customized Detection

Separate pattern width, depth, and sensitivity for open- and closed-door states provide maximum flexibility

Standards Compliant

Fully monitored internally; capable of external monitoring

PRODUCT SERIES

10BODYGUARDT	Header-mounted, safety sensor
10BODYMNT	Spacer for BODYGUARD-T
10BGQD	Quick-disconnect cable for BODYGUARD-T (78")
10CAPKIT	(1) left / (1) right end cap and mounting screws
10HORTONSSHARN	BODYGUARD-T / SUPERSCAN-T relay harness for use with Horton Control
10LO21	Lock-out modules <i>see page 53 for more information</i>
10REMOTE	Universal remote control for sensor setup
10URC	Universal rain cover for BODYGUARD-T
15.0075	Harness for LO21 and LO21P
20.2015	BODYGUARD-T light pipe and cover for light pipe
30.0345	7-position, female pin connector
41.3879	Adjustable mounting clips for PCB
70.0207	BODYGUARD-T lens cut to 4 7/8"



FLY KIT

COMPACT, PASSIVE INFRARED REQUEST-TO-EXIT SENSOR

Precise Infrared Detection

Sensing field adjustment masks provide accurate detection zones (two included)

Customizable

DIP switches for user-defined settings



TECHNICAL SPECIFICATIONS

Technology	Passive infrared with microprocessor
Mounting Height Recommended	6 ½ – 8' (max. 10')
Mounting Angles	0 – 180°
Power Supply	12 – 24 VAC ±10% 50/60 Hz 12 – 24 VDC -10% / 30%
Current Consumption	< 10 mA (20 mA if the relay output is activated)
Contact Rating	1 A / 75 VDC or 50 VAC potential free contact NO / NC
Optical Characteristics	Passive infrared with four elements 15 Fresnel lenses with full independent masking possibilities
Warm-up Time	10 s
Response Time	200 ms (max)
Relay Hold Time Standard Fly Fly Extended Relay Time	0.5 or 2 s 15 or 30 s
Operating Temperature	-22 – 140 °F (-30 – 55 °C)
Cable	9' 4-conductor cable with 5-pin connector
Weight	1.4 oz (40 g)
Sensor Dimensions	4" (W) × 1 ¼" (H) × 1" (D)
Housing Color	Black



Adjustable Access Settings

Extended Relay Time (ERT) version is available for hold times of 15 or 30 seconds

Low-Profile Design

Compact, aesthetically pleasing design; packages include both ceiling- and surface-mount adapters

PRODUCT SERIES

10FLYKITB	(1) Passive infrared detector for request-to-exit applications (black) (1) Surface adapter (black) (1) Flush mounted ceiling adapter (black)
10FLYKITBERT	(1) Passive infrared detector with extended relay time (black) (1) Surface adapter (black) (1) Flush mounted ceiling adapter (black)
70.0011	22 gauge 4-conductor cable <i>sold by the foot</i>



FOCUS FAMILY



FOCUSED, ACTIVE INFRARED PRESENCE SENSORS

Low-Profile Detection

Low profile, recessed mount enables FOCUS 2 and SMART FOCUS to protect pedestrians from contact with the moving door

Monitoring Capable

SMART FOCUS is fully monitored (not FOCUS or FOCUS 2)




Perfect For Activation Of Small Windows and Pass-Thru

Ideal for drive-thru and pass-thru applications

Ideal for Gates and Barriers

Horizontal mount for use in gate and barrier applications



TECHNICAL SPECIFICATIONS

10FOCUS and 10FOCUS2

Technology	Focused, active infrared
Detection Mode	Presence
Power Supply	24 VAC/VDC \pm 10%
Current Consumption	60 mA (on); 30 mA (off)
Output Interface; Relay	Relay; max. contact rating is 1 A at 30 V (resistive)
Detection Range	0 – 8 ½'
Distance Adjustment	2 – 8', rotating cam with linear adjustment
Detection Time	< 50ms
Detection Signal Duration	Infinite presence detection
LED Activity	
Green	No detection
Operating Temperature Range	-30 – 140 °F
Connection to controller	5-conductor cable
Relay Output	NO or NC

PRODUCT SERIES

10FOCUS	Distance-measuring, active infrared presence sensor (surface-mount)
10FOCUS2	Distance-measuring, active infrared presence sensor (recessed-mount)
10SMARTFOCUS	Distance-measuring, active infrared presence sensor (recessed-mount); adapts to environment by the push of a button
10SMARTFOCUS SMA	Surface-mount adapter for SMART FOCUS sensor
15.0118	FOCUS 2 harness (240")
70.0068	FOCUS harness (48")
35.1128	6-conductor cable with socket for SMART FOCUS
70.0138	Lens extrusion, ordered by inch (9" needed for 10FOCUS lens replacement)

10SMARTFOCUS

Technology	Focused, active infrared
Detection Mode	Presence detection by distance measurement
Detection Field	1 19/32" \times 2 19/32" at 7 1/4' mounting height
Light Indicator	
Red	ON during detection
Orange	Flashes 1x after power on
Response Time	64 ms
Mounting Height	2 – 10'
Supply Voltage	12 – 24 VAC/VDC -5% / 10%
Mains Frequency	50 – 60 Hz
Max. Current Consumption	120 mA at 24 VAC / 80 mA at 24 VDC
Standard Output	Relay (free of potential contact)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 60 VA (AC)
Monitoring Input	1 optocoupler (free of potential contact)
Max. Contact Voltage	30 V
Voltage Threshold	High state: > 10 V Low State: < 1 V
Hold Time	0.5 s
Reflectivity	min. 10% at IR-wavelength of 850 nm
Temperature Range	-13 – 131 °F (-25 – 55 °C) 0 – 95% rel. humidity, non-condensing
Degree of Protection	IP53
Dimensions	5 3/4" (L) \times 1 3/8" (H) \times 2" (D)
Length of Main Cable	8'
Norm Conformity	IEC 61000-6-2; IEC 61000-6-3 ISO 13849-1 Performance Level «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)



IS40P


PRESENCE SENSOR WITH VIRTUAL LOOP FUNCTIONALITY

Adjustable Learn Time

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment

Reduce False Detections

Six modes of detection filtering are available for microwave immunity, as well as pedestrian and parallel traffic rejection

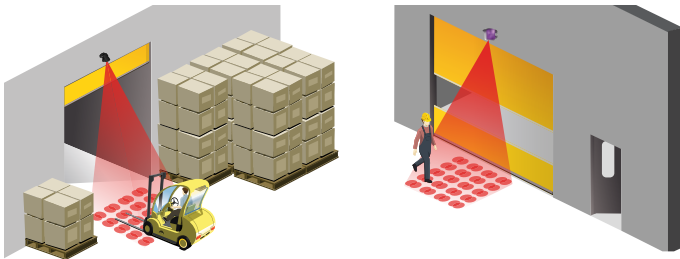


Programmable Via Remote

Remote control programming enables user to quickly and safely make changes from the ground (sold separately)

Easy to Program

Adjustable infrared immunity modes mitigate environmental disturbances such as subtle door vibrations, light, sun, rain, and snow

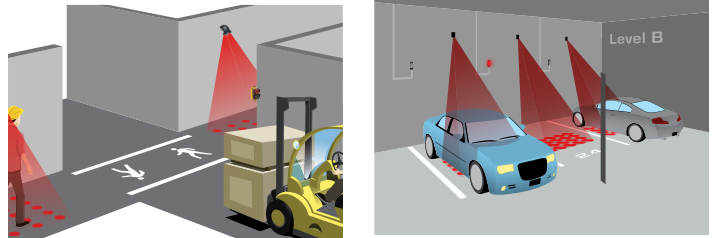

TECHNICAL SPECIFICATIONS

Technology	Active infrared
Detection Mode	Presence
Mains Frequency	50 – 60 Hz
Power Consumption	< 3.5 W
Output	2 relays (free of potential change-over contact)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 48 VA (AC)
Supply Voltage	12 – 24 VAC; ±10% 12 – 24 VDC; 10% / -3%
Temperature Range	-22 – 140 °F
Tilt Angle	15 – 45°
Transmitter Frequency / Wavelength	875 nm
Transmitter Power Density	< 250 mW / m ²
Detection Field	10' × 10' at max. mounting height of 16' (emitting spots)*
Output Hold Time	0.5 s
Min. Detection Speed	0 in/s to activate detection
Reaction Time	250 ms
Mounting Height	8 – 16'
Humidity	0 – 95% non-condensing
Weight	14 oz
Dimensions	3 ½" (W) × 4" (H) × 5" (D)
Materials	ABS, PC
Cable Length	32'
Degree of Protection	IP65
Norm Conformity	EMC: 2004 / 108 / EC R&TTE: 1999 / 5 / EC

* Zone detected by SPOTFINDER (i.e. slightly larger than actual detection field)

PRODUCT SERIES

10IS40P	Industrial sensor utilizing active infrared presence detection
10INDBRACKET	Industrial mounting bracket
10MINIBRACKET	Short, adjustable mounting bracket
10WBA	Universal mounting bracket arm
10WBAMOUNT	Universal mounting bracket plate
10REMOTE	Universal remote control for sensor setup
10SPOTFINDER	Active infrared spotfinder
35.1566	8-pin conductor cable (30')



IXIO-ST

PRESENCE SENSOR FOR AUTOMATIC, SLIDING DOORS

Precise Presence Detection


Two 24-spot, high-density infrared, safety curtains providing precise presence detection

Easily Adjustable

Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD

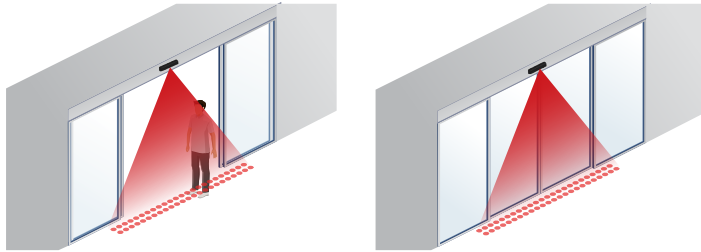


Intelligent Solution

On-board microprocessor optimizes data analysis, monitors sensor performance, and enables system integration

Standards Compliant

Fully monitored internally, capable of external monitoring



TECHNICAL SPECIFICATIONS

Detection Mode	Presence typical response time: < 200 ms (max: 500 ms)
Technology	Active infrared with background analysis Spot: 2" x 2" (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Mounting Height	6 ½ – 11 ½' local regulations may impact acceptable mounting height (pedestrian applications only)
Sensor Temperature Range	-13 – 131 °F 0 – 95% relative humidity, non-condensing LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.
Output	
Relay 1	Electromechanical relay (potential and polarity free) Max. contact current: 1 A Max. contact voltage: 30 VAC Adjustable hold time: 0.5 – 9 s
Relay 2	Solid-state relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 VDC / 30 VAC
Test / Monitoring Input	Sensitivity: Low: < 1 V High: > 10 V (max. 30 V) Response time on test request: typical < 5 ms
Supply Voltage	12 – 24 VAC ±10%; 12 – 30 VDC ±10% (to be operated from SELV compatible power supplies only)
Power Consumption	< 2.5 W
Noise	< 70 dB
Compliance	ISO 13849 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)

PRODUCT SERIES

10IXIOST	Active infrared presence sensor for sliding doors
10ICA	IXIO ceiling accessory
10IMB	IXIO bracket accessory
10OURA	Universal rain accessory
10CDA	IXIO curved door accessory
10IXIOSPACER	IXIO spacer (black)
35.1286	IXIO replacement cover (black)
35.1302	IXIO replacement cover (white)
35.1303	IXIO replacement cover (silver)
10RETROFITSPACER	Retrofit Spacer Kit (spacer, 2 ½" harness, 9" harness)
20.5349	IXIO / ULTIMO control harness (10')
20.5359	Wire harness (30')
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup



IXIO-ST INDUSTRIAL

PRESENCE SENSOR FOR SMALL, INTERIOR, INDUSTRIAL DOORS



Precise Presence Detection




Two 24-spot, high-density infrared, safety curtains providing precise presence detection

Easily Adjustable

Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD



Intelligent Solution

On-board microprocessor optimizes data analysis, monitors sensor performance, and enables system integration

Standards Compliant

Fully monitored internally, capable of external monitoring

TECHNICAL SPECIFICATIONS

Detection Mode	Presence typical response time: < 200 ms (max: 500 ms)
Technology	Active infrared with background analysis Spot: 2" x 2" (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Mounting Height	6'6" – 11'6" local regulations may impact acceptable mounting height (pedestrian applications only)
Sensor Temperature Range*	-13 – 131 °F 0 – 95% relative humidity, non-condensing LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.
Output	
Relay 1	Electromechanical relay (potential and polarity free) Max. contact current: 1 A Max. contact voltage: 30 VAC Adjustable hold time: 0.5 – 9 s
Relay 2	Solid-state relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 VDC / 30 VAC
Test / Monitoring Input	Sensitivity: Low: < 1 V High: > 10 V (max. 30 V) Response time on test request: typical < 5 ms
Supply Voltage	12 – 24 VAC ±10%; 12 – 30 VDC ±10% (to be operated from SELV compatible power supplies only)
Power Consumption	< 2.5 W
Noise	< 70 dB
Degree of Protection	IP54
Compliance	ISO 13849 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)

PRODUCT SERIES

10IXIOSTINDUS	Active infrared presence sensor for sliding doors
10ICA	IXIO ceiling accessory
10IMB	IXIO bracket accessory
10OURA	Universal rain accessory
10CDA	IXIO curved door accessory
10IXIOSPACER	IXIO spacer (black)
35.1286	IXIO replacement cover (black)
35.1302	IXIO replacement cover (white)
35.1303	IXIO replacement cover (silver)
10RETROFITSPACER	Retrofit Spacer Kit (spacer, 2 ½" harness, 9" harness)
20.5349	IXIO / ULTIMO control harness (10')
20.5359	Wire harness (30')
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup



LZR®-FLATSCAN S

COMPACT, SINGLE-CURTAIN, LASER SCANNER FOR DOOR, GATE, AND BARRIER APPLICATIONS

Inductive Loop Alternative

Virtual presence loop ideal for applications where cutting ground for loops is prohibited, impossible, or expensive

Versatile Sensor Orientation

Left or right, horizontal or vertical sensor mounting allows for convenient sensor installation based on application needs

Robust Construction

Metal enclosure and IP66 rating protects sensor in harsh environments




Compact Design

Low-profile solution reduces risk of wear and tear in vehicle applications

Inductive Loop Alternative

Fog filter and additional immunity settings allow for field adjustments to mitigate environmental interferences



TECHNICAL SPECIFICATIONS

Technology	LASER sensor, Time-of-Flight measurement
Detection Mode	Presence
Max. Detection Range	max. 18' x 18' (13' 1/8' @ 5% reflectivity)
Opening Angle	90°
Emission Characteristics	wavelength 905nm; max. output pulse power 25W (CLASS 1) wavelength 635nm; max. output CW power 0.95mW (CLASS 2) visible spot
Angular Resolution	0.23° (400 spots within 90°)
LEDs	1 tri-colored LED: detection / output status
Supply Voltage*	12 – 24 VDC ±15%
Power Consumption	≤ 2. W, peak current: 1A
Response Time	max. 50ms (+ output activation delay)
Output	1 opto (galvanic isolation - polarity free)
Max. Switching Voltage	42 VAC/VDC
Max. Switching Current	100mA
	1 relay (free of potential contact)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	1A (resistive)
Max. Switching Power	30W DC / 60 VAC
Dimensions	5" (L) x 3 1/2" (H) x 2" (D) (without bracket)
Color	Black
Protection Degree	IP66 (IEC 60529)
Temperature Range (when powered)	-22 – 140 °F (-30 – 60 °C)
Humidity	0 – 95% non-condensing
Vibrations	< 2 G
Compliance	IEC 60825-1, IEC 60950-1, IEC 61000-6-2, IEC 61000-63, IEC 60529:2001

* If only VAC power is available, a 12V transformer paired with a rectifier must be used. Do not use a 24V transformer and rectifier as this will cause damage to the product.

PRODUCT SERIES

10LZRFLATSCAN-S	LZR-FLATSCAN S sensor
10FSSMB*	LZR-FLATSCAN S bracket
10REMOTE**	BEA Universal Remote Control

* Required for installation (sold separately)

** Required for installation and adjustment (sold separately)



LZR®-FLATSCAN W

SAFETY SENSOR FOR AUTOMATED WINDOWS



Full Coverage of the Window

Pattern covers the entire window – including the inner frame borders
– up to 13 feet

Easy and Flexible Mounting

Universal mounting base offers flexible installation and allows a variety of positions to suit niche application needs

Quick and Intuitive Configuration

The detection field size is defined by a simple hand movement; height and width of the field are automatically calculated

Virtual Push Button

One or both virtual push buttons can be programmed to activate the opening or closing of the window



TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement, Background analysis
Detection Mode	Presence
Max. Detection Range	13' (diagonal) (e.g. @ 40' width, max. 16')
Number of Curtains	1
Measurement Points	400
Angular Resolution	0.27°
Min. Object Size	¾" (depending on the settings and the installation)
Optical Characteristics	IR LASER, Class 1 wavelength: 905 nm output power: < 0.1mW
Supply Voltage	12 – 24 VDC ±15% The equipment must be powered by a SELV limited power source ensuring double insulation between primary voltages and the Equipment supply. The supply current should be limited to 1.5A.
Power Consumption	≤ 2 W
Typ. Response Time	400 ms
Peak Current at Power-on	0.8A (max. 20 ms @ 24 VDC)
Output	2 solid state relays (galvanic isolation - polarity free) 42 VAC/VDC Max. Switching Voltage Max. Switching Current 100 mA
Input	1 optocoupler (galvanic isolated - polarity free) Max. Contact Voltage Voltage Threshold Log. H: >8 VDC Log. L: <3 VDC
LED Signals	1 tri-colored LED: detection/output status
Dimensions	5 ¾" (L) × 3 1/32" (H) × 1 1/8" (D) (mounting base adds 1/2")
Materials / Color	PC, ASA / black
Tilt Angles	-2 – 6° (with mounting bracket) 2 – 10° (without mounting bracket)
Protection Degree	IP54
Temperature Range	-22 – 140 °F if powered 14 – 140 °F without power

Humidity	0 – 95% non-condensing
Vibrations	< 2 G
Compliance	IEC 60335-2-103 ISO 13849-1 (PL "d"); IEC 61508 (SIL2)

PRODUCT SERIES

10LZRFLATSCAN-WLB	Safety sensor for automated windows (left)
10LZRFLATSCAN-WRB	Safety sensor for automated windows (right)



LZR®-FLATSCAN SW

SINGLE CURTAIN, STAND ALONE, DOOR MOUNTED, SAFETY SYSTEM FOR FULL- AND LOW-ENERGY SWING DOORS

Background Independence


LASER technology ensures independence of all types of flooring (pedi-mats, carpet, reflective flooring, wet surfaces, etc.) and the surrounding environment of the door (guide rails, walls, weather, etc.)

Leading Edge Safety

Leading-edge safety extends the detection area beyond the leading edge of the door for enhanced safety

Hand Gesture Setup™

Easy door-width programming using Hand-Gesture Setup™ reduces configuration time

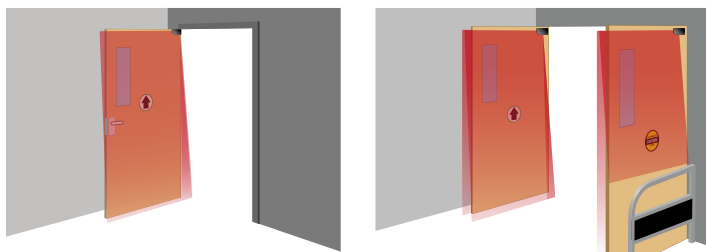

Reduced Components


Hub-less system offers fewer components for easier setup and installation

Reduced Uncovered Zone

LASER technology provides a reduced uncovered zone of down to 3/4 inch

UL10B/C Listed

Fire rated for up to one hour

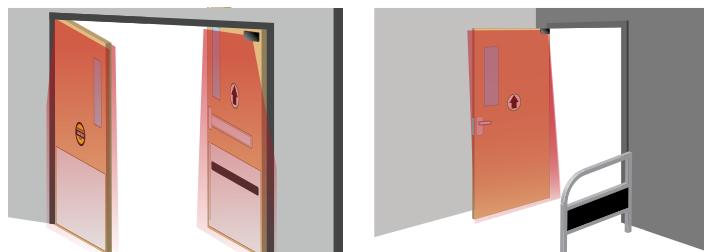

TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Detection Mode	Presence
Max. Detection Range	13' (diagonal) with reflectivity of 2% (e.g. at (W) x 5' > max. (H) x 12') <i>see Page 15 of Users Guide</i>
Detection Area	
Door Leaf Safety	90°
Pinch Zone Safety	16°
Angular Resolution	
Door Leaf Safety	1.3°
Pinch Zone Safety	0.2°
Typ. Min. Object Size	
Door Leaf Safety	4" at 13' (in proportion to object distance, DIP 2 = ON)
Pinch Zone Safety	3/4" at 13' (in proportion to object distance, DIP 2 = ON)
Emission Characteristics	Wavelength 905 nm; max. output pulse power 25 W; Class 1
Supply Voltage	12 – 24 VDC ±15% *
Power Consumption	≤ 2 W
Response Time	
Door Leaf Safety	max. 50 ms
Pinch Zone Safety	max. 90 ms
Test Input	30 VDC (max. switching voltage) low < 1 V high > 10 V (voltage threshold)
Output	2 electronic relays (galvanic isolation - polarity free)
Max. Switching Voltage	42 VAC/VDC
Max. Switching Current	100 mA
LED Activity	
Red	Swing-side detection
Green	Approach-side detection
Yellow	Error
Dimensions	5 1/2" (W) x 3 1/2" (H) x 1" (D) (mounting bracket adds 1/4")

Materials / Color	PC / ASA / Black, White, or Silver
Tilt Angles	2 – 10° (without mounting bracket)
Degree of Protection	IP54 (EN 60529)
Temperature Range	-22 – 140 °F (if powered)
Humidity	0 – 95% non-condensing
Vibrations	< 2 G
Min. Door Leaf Speed	2° / s
Norm Conformity	ISO 13849-1 Pl "d"/ CAT2; IEC 60825-1; IEC 60950-1; IEC 61000-6-2; IEC 61000-6-3; IEC 62061 SIL 2; UL 10B/C Fire-Rated 1 hour (file #R39071) - <i>black material only</i>

* This sensor is powered by DC voltage only. If only VAC power is available, a 12V transformer paired with a rectifier must be used. Do not use a 24V transformer and rectifier as this will cause damage to the product.



LZR®-FLATSCAN SW

SINGLE CURTAIN, STAND-ALONE, DOOR MOUNTED, SAFETY SYSTEM FOR FULL- AND LOW-ENERGY SWING DOORS

PRODUCT SERIES

10LZRFLATSCAN-SWB	Full-energy, swing door, safety system (black)
10LZRFLATSCAN-SWS	Full-energy, swing door, safety system (silver)
10LZRFLATSCAN-SWW	Full-energy, swing door, safety system (white)
10LZRFLATSCAN-LELB	Low-energy, swing door, safety system (left mount, black)
10LZRFLATSCAN-LELS	Low-energy, swing door, safety system (left mount, silver)
10LZRFLATSCAN-LELW	Low-energy, swing door, safety system (left mount, white)
10LZRFLATSCAN-LERB	Low-energy, swing door, safety system (right mount, black)
10LZRFLATSCAN-LERS	Low-energy, swing door, safety system (right mount, silver)
10LZRFLATSCAN-LERW	Low-energy, swing door, safety system (right mount, white)
10LZRFLATSCAN-LB	LZR-FLATSCAN SW sensor (left, black)
10LZRFLATSCAN-LS	LZR-FLATSCAN SW sensor (left, silver)
10LZRFLATSCAN-LW	LZR-FLATSCAN SW sensor (left, white)
10LZRFLATSCAN-RB	LZR-FLATSCAN SW sensor (right, black)
10LZRFLATSCAN-RS	LZR-FLATSCAN SW sensor (right, silver)
10LZRFLATSCAN-RW	LZR-FLATSCAN SW sensor (right, white)
10LZRFLATSCANGDA	LZR-FLATSCAN glass door accessory
20.5433	LZR-FLATSCAN control harness
35.0213	LZR-FLATSCAN SW replacement cover (left, black)
35.0214	LZR-FLATSCAN SW replacement cover (right, black)
35.0220	LZR-FLATSCAN SW replacement cover (left, white)
35.0221	LZR-FLATSCAN SW replacement cover (right, white)
35.0242	LZR-FLATSCAN SW replacement cover (left, silver)
35.0243	LZR-FLATSCAN SW replacement cover (right, silver)
35.1329	LZR-FLATSCAN primary/secondary harness
70.5745	Sentrex retrofit accessory
70.5751	LZR-FLATSCAN spacer (silver)
70.5752	LZR-FLATSCAN spacer (white)
70.5753	LZR-FLATSCAN spacer (black)



LZR®-FLATSCAN 3D SW

FOUR CURTAIN, STAND ALONE, DOOR MOUNTED, SAFETY SENSOR

Advanced Safety



The four detection curtains ensure a full-safety coverage of the leaf, hinge area and leading edge of the door, exceeding all industry standards

Built-in Knowing Act Device

Two Virtual Push Buttons per sensor provide a non-contact form of door activation without wiring or installing in-wall switches

Adaptive Sensing

High-resolution detection curtains create a reliable solution with the ability to self-adapt as the door opens, preventing false detections from guide rails and tight corridors

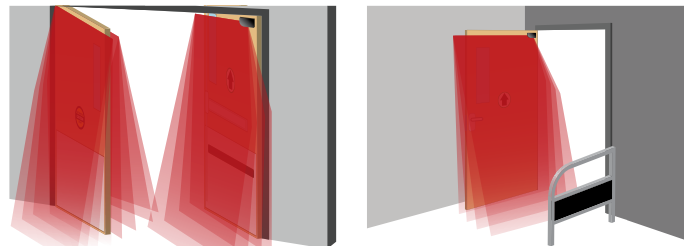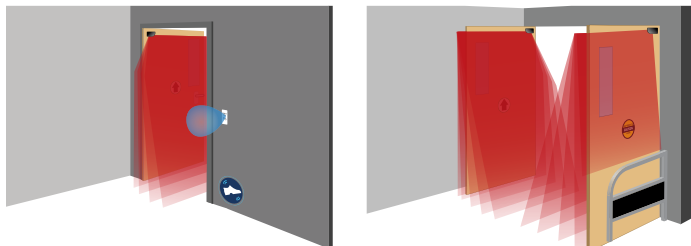

Background Independence

LASER technology ensures independence of all types of flooring (pedi-mats, carpet, reflective flooring, wet surfaces, etc.) and the surrounding environment (weather and lighting)

Easy Setup

Hub-less system offers fewer components for a more straightforward setup and installation. While Hand Gesture Setup™ reduces configuration time of the detection field width

This sensor is powered by DC voltage only. If only VAC power is available, a 12V transformer paired with a rectifier must be used. Do not use a 24V transformer and rectifier as this will cause damage to the product.

TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Detection Mode	Presence
Max. Detection Range	13' (diagonal) with reflectivity of 2% e.g. at 5' width, max. H = 12'
Recommended Mounting Height	75 – 98"
Opening Angle	
Door Leaf Safety	80°
Pinch Zone Safety	20°
Angular Resolution	
Curtain 1	0.2°
Curtain 2	1°
Curtain 3	1.7°
Curtain 4	2.5°
Tilt Angles	0 – 5°
Typ. Min. Object Size	¾" at 13' in curtain C1
Min. Door Leaf Speed	2%/s
Emission Characteristics (IEC 60825-1)	IR LASER: wavelength 905 nm; output power < 0.1mW; Class 1
Supply Voltage*	12 – 24 VDC ±15% (to be operated from SELV-compatible power supplies only)
Power Consumption	< 2 W
Response Time	Typ. < 120 ms (max. 220 ms)
Output	3 electronic relays (galvanic isolation - polarity free)
Max. Switching Voltage	42 VAC/VDC
Max. Switching Current	100 mA
Dimensions	5 ¾" (L) × 3 ½" (H) × 2 ½" (D) Mounting base: D + 1 ¾" Spacer: D + 1 ½"
Materials - Color	PC/ASA - black
Protection Degree	IP44 (IEC 60529)
LED Signals	1 RGB LED: Detection / Output Status

Temperature Range	-13 – 140 °F
Humidity	0 – 95% non-condensing
Vibrations	< 2 G
Compliance	ISO 13849-1 PL "d"/ CAT2; IEC 60825-1; IEC 62061 SIL 2 UL10 – file # R39071

PRODUCT SERIES

10LZRFLATSCAN3D-SWBK	Left and right sensor kit
10LZRFLATSCAN3D-SWBKU	Left and right sensor kit w/ power supply
10LZRFLATSCAN3D-LESWBK	Sensor kit for low-energy doors
10LZRFLATSCAN3D-LELBKIT	Sensor kit for low-energy doors, left
10LZRFLATSCAN3D-LERBKIT	Sensor kit for low-energy doors, right
10LZRFLATSCAN3D-LBK	Single sensor kit, left
10LZRFLATSCAN3D-RBK	Single sensor kit, right
10LZRFLATSCAN3D-LB	Replacement sensor, left
10LZRFLATSCAN3D-RB	Replacement sensor, right
10LZRFLATSCAN3D-GDA	LZR-FLATSCAN glass door accessory
35.0287	LZR-FLATSCAN 3D SW replacement cover, left
35.0288	LZR-FLATSCAN 3D SW replacement cover, right
35.0236	LZR-FLATSCAN 3D SW replacement base, left
35.0237	LZR-FLATSCAN 3D SW replacement base, right
70.5753	Spacer
20.5433	LZR-FLATSCAN 3D SW control harness
35.1329	Primary / Secondary Harness
70.5745	Sentrex retrofit accessory



LZR®-H100

LASER SCANNER FOR GATE AND BARRIER APPLICATIONS



Dual Relay Activation

Two relays allow for activation via motion or presence

Effective Alternative to Loop Detectors

Ideal for applications where cutting ground for loops is prohibited, impossible, or expensive

Reliable and Constant Detection

Time-of-Flight, presence based, opto-electronic sensor ensures accurate and immediate detection

Trajectory Detection

Ability to detect vehicle trajectory during approach and departure

Pedestrian Traffic Rejection

Ability to detect or ignore pedestrian traffic

Large Detection Field

Maximum detection field of 32 ft by 32 ft (9 ¾ m by 9 ¾ m)

Ease of Installation

Teach-in setup via walk path or remote control configuration



TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Detection Mode	Motion and presence
Max. Detection Range	32' x 32' (9 ¾ m)
Min. Detection Field (safety)	1'8" (½ m)"
Remission Factor	> 2%
Angular Resolution	0.3516°
Emission Characteristics	
IR LASER	Wavelength 905 nm; output power 0.10mW (CLASS 1)
Red Visible LASER	Wavelength 635 nm; output power 0.95mW (CLASS 2)
Supply Voltage	10 – 35 VDC at sensor terminal
Peak Current at Power-On	1.8 A (max. 80 ms at 35 V)
Power Consumption	< 5 W
Response Time	
Motion Detection	typ. 200 ms (adjustable)
Presence Detection	typ. 20 ms (max. 80 ms)
Output	2 electronic relays (galvanic isolated – polarity free)
Max. Switching Voltage	35 VDC / 24 VAC
Max. Switching Current	80 mA (resistive)
Switching Time	t ^{ON} = 5 ms; t ^{OFF} = 5 ms
Output Resistance	typ 30 Ω
Voltage Drop on Output	< 0.7 V at 20 mA
LED Activity	
Blue	Power-on
Orange	Error status
Red/Green (x2)	Detection / Output Status (green = no detection, red = detection)
Dimensions	3 ⅝" (W) x 2 ¾" (H) x 5" (D) mounting bracket: + ½"
Cable Length	33'
Materials	PC, ASA
Color	Black
Rotation Angle on Bracket	±5° (lockable)

Tilt Angle on Bracket	±3°	
Degree of Protection	NEMA 4 / IP65	
Temperature Range	-22 – 140 °F (-30 – 60 °C) powered 14 – 140 °F (-10 – 60 °C) unpowered	
Humidity	0 – 95% non-condensing	
Vibrations	< 2 G	
Pollution on Front Screens	max. 30%; homogenous	
Norm Conformity	2006 / 95 / EC: LVD 2004 / 108 / EC: EMC IEC 60825-1:2007 IEC 61000-6-2:2005	2002 / 95 / EC: RoHS IEC 60529:2001 IEC 60950-1:2005 IEC 61000-6-3:2006

PRODUCT SERIES

10LZRH100	LASER scanner with highly precise detection zone
10LBA	LZR mounting bracket accessory
10INDBRACKET	Industrial mounting bracket
10MINIBRACKET	Short, adjustable mounting bracket
10LHB	LZR housing bracket
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10PSST242	Plug-in power supply
10REMOTE	Universal remote control for sensor setup
35.1242	30' harness, 8-conductor



FC

FDA

LZR®-I30

LASER SCANNER FOR INDUSTRIAL AUTOMATION

3-Dimensional Safety Zone

Four curtains of detection each capable of 360 in by 360 in (30 ft by 30 ft)

Highly Accurate Detections

Detects objects as small as 2 inches at 30 feet away, depending on application




Energy Savings

Has the ability to ignore dynamic ground conditions and extreme weather

Easily Adjustable

Three visible LEDs for pattern alignment



TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Detection Mode	Motion and presence (EN 12453 Typ. E)
Max. Detection Range	30' x 30'
Remission Factor	> 2%
Emission Characteristics	
IR LASER	Wavelength 905 nm; output power 0.10mW (CLASS 1)
Red Visible LASER	Wavelength 635 nm; output power 0.95mW (CLASS 2)
Supply Voltage	10 – 35 VDC at sensor terminal (to be operated from SELV compatible power supplies only)
Peak Current at Power-On	1.8 A (max. 80 ms at 35 V)
Power Consumption	< 5 W
Response Time	Typ. 20 ms; max. 80 ms (+ output activation delay)
Output	2 electronic relays (galvanic isolated – polarity free)
Max. Switching Voltage	35 VDC / 24 VAC
Max. Switching Current	80 mA (resistive)
LED Activity	
Blue	Power-on
Orange	Error status
Red/Green (x2)	Detection / Output Status (green = no detection, red = detection)
Dimensions	
Housing	5" (W) x 2 3/4" (H) x 3 2/5" (D)
10LBA	Adds 1 1/20"
Cable Length	30'
Materials	PC, ASA
Color	Black
Rotation Angle on Bracket	±5° (lockable)
Tilt Angle on Bracket	±3°
Degree of Protection	NEMA 4 / IP65
Temperature Range	-22 – 140 °F if powered 14 – 140 °F if unpowered
Humidity	0 – 95% non-condensing
Vibrations	< 2 G
Pollution on Front Screens	Max. 30%; homogenous

Test Body Dimensions	700 mm x 300 mm x 200 mm (28" x 12" x 8")	
Norm Conformity	2006 / 95 / EC: LVD 2002 / 95 / EC: RoHS 2004 / 108 / EC: EMC 2006 / 42 / EC: MD EN 12453:2000 chapter 5.1.1.6, chapter 5.5.1 Safety device E EN 12978:2009 EN ISO 13849-1:2008 CAT2, PL "d"; EN 60529:2001	IEC 60825-1:2007 EN 60950-1:2005 EN 61000-6-2:2005 EN 61000-6-3:2006 IEC 61496-1:2009 EN 61496-3: 2008 ESPE Type 2 EN 62061:2005 SIL 2

PRODUCT SERIES

10LZRI30	LASER scanner with highly precise detection zone
10LBA	LZR mounting bracket accessory
10INDBRACKET	Industrial mounting bracket
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10PS12-24	UL / ULC Listed power supply
10PSVR5T	Voltage regulator, 24 VAC / 24 VDC
35.1242	8-conductor cable (30')



LZR®-MICROSCAN T

STAND-ALONE, DOOR-MOUNTED, SWING-DOOR, SAFETY SYSTEM



Easy to Install

Plug-and-play technology utilizing a centralized hub and intuitive LCD interface greatly reduces installation and setup time

Highly Accurate Detection

High resolution, self-adapting detection zones, coupled with reduced uncovered zones create the most accurate and reliable safety sensor

Built-in Troubleshooting





On-board error log ensures easy technical support

Standards Compliant

Fully monitored internally, capable of external monitoring

UL10B/C Listed

Fire-rated for up to three hours



TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Detection Mode	Presence
Min. / Max. Door Width	20 – 48" (measured from leading edge to sensor LED)
Mounting Height	75 – 98" (measured from finished floor to sensor LED)
Remission Factor	> 2%
Angular Resolution	2.56°
Testbody	28" (H) x 12" (W) x 8" (D)
Emission Characteristics IR LASER	Wavelength 905 nm; maximum output pulse power 35 W (Class I)
Supply Voltage	12 – 30 VDC (15 W Class II)
Power Consumption	< 15 W
Response Time	Typ. 40 ms; max. 80 ms
Output Rating	4 electro-mechanic relays (galvanic isolated - polarity free) All outputs Class 2 supply, 12 – 24 VAC, 12 – 30 VDC, max. 15 W
Input Rating	2 optocouplers (galvanic isolated - polarity free) 12 – 30 VDC, max. 15 W
Test Input	8 – 15 VDC
Temperature Range	-13 – 121 °F (-25 – 55 °C)
Degree of Protection	Hub: IP20 / NEMA 1 Sensor: IP53 / NEMA 3
Humidity	0 – 95%, non-condensing
Vibrations	< 2 G
Materials	PC, ASA
Norm Conformity	EN 60825-1-Eye-safety class 1 IR LASER (905 nm) UL10B/C Fire Rated 3 hrs (file #R39071)
Mounting Angle (rotational)	35° fixed
Tilt Angle	0 – 5° (for angles less than 5°, contact Technical Support)
Pollution on Front Screens	Maximum 30%, homogenous

PRODUCT SERIES

10LZRMICROSCAN1T	Single door kit (1) left sensor, (1) right sensor, (1) hub, (1) primary harness, (1) secondary harness, (1) door control harness, (1) home switch, (1) door loop / cap kit, (1) sensor spacer
10LZRMICROSCAN1UT	(1) 10LZRMICROSCAN1T (1) 10LZRMICROSCAN-UKIT
10LZRMICROSCAN2T	Pair/Dual-egress door kit (2) left sensors, (2) right sensors, (1) hub, (2) primary harnesses, (2) secondary harnesses, (2) door control harnesses, (2) home switches, (2) door loops / cap kits, (2) sensor spacers
10LZRMICROSCAN2UT	(1) 10LZRMICROSCAN2T (1) 10LZRMICROSCAN-UKIT
10MICROSCAN-UKIT	Universal accessory kit converts Single door kit and Pair/Dual-egress door kit into 10MICROSCAN1UT and 10MICROSCAN2UT (1) power supply (1) ON / OFF / HOLD OPEN switch

OPTIONAL MOUNTING KITS

10MICROSCANMOUNT	Center-pivot door mounting kit includes: (1) Left mounting arm (1) Right mounting arm
10MICROSCAN-Y	Glass/Fire door mounting kit includes: (1) 20.5319 - 20" secondary harness (1) 20.5320 - "Y" cable LZR-MICROSCAN-T hub to LZR-MICROSCAN-T harness (1) 70.0202 - 26" standard door cord loop (1) 55.0001 - Door loop end cap for door frame



LZR®-MICROSCAN T

STAND-ALONE, DOOR-MOUNTED, SWING DOOR, SAFETY SYSTEM



REPLACEMENT COMPONENTS

10LZRMICROLEFTT	Left LZR-MICROSCAN T sensor
10LZRMICRORIGHTT	Right LZR-MICROSCAN T sensor
10LZRMICROSCANHUB	LZR-MICROSCAN T hub
10DOORSWITCH	Universal Kit ON / OFF / HOLD OPEN switch
20.5095	Power supply harness
20.5096	EAGLE harness for LZR-MICROSCAN T
20.5222	Door control harness
20.5304	System harness
20.5310	ON / OFF / HOLD OPEN switch jumper
20.5319	Secondary harness for 10MICROSCANMOUNT (20")
20.5320	"Y" cable LZR-MICROSCAN-T hub to LZR-MICROSCAN-T harness
20.5322	LZR-MICROSCAN T plug-n-play harness for Horton 4190
20.5347	Hub to LZR-MICROSCAN T harness (30')
30.5558	Universal kit power supply
30.5580	2-wire switch
35.1326	Primary sensor harness
35.1327	Secondary sensor harness
41.7922	Left pass-through LZR-MICROSCAN T sensor end cap
41.7923	Right pass-through LZR-MICROSCAN T sensor end cap
41.8632	End cap screws
50.0046	Velcro tabs
50.0048	Spacer mount screws
55.0001	Jamb cap kit
50.1818	Spacer mount screws (metal)
50.5282	Spacer mount screws (wood)
50.5283	Home Switch (surface mount)
70.0202	26" standard door cord loop
70.5554	LZR-MICROSCAN T sensor spacer
70.5745	Sentrex retrofit accessory
35.1321	LZR-MICROSCAN T replacement cover



LZR®-S600

LASER SCANNER FOR BUILDING AUTOMATION AND SECURITY





BEA's Largest Detection Field

Maximum detection range of 82 ft by 82 ft

Safe and Reliable

External, entrapment protection device capable of monitoring with interfaces building management systems




Reduce False Detections

High immunity to environmental interferences

Eliminates False Detections

Has the ability to ignore dynamic ground conditions and extreme weather



TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Detection Mode	motion and presence
Detection Range	Default: 33' x 33' at 2% remission factor (max. 82' x 82')
Angular Resolution	0.3516°
Min. Detected Object Size (typ.)	0.8 in at 10' 1.4 in at 16' 2.8 in at 33' 6.9 in at 82'
Emission Characteristics	
IR LASER	wavelength 905 nm; output power 0.10mW (CLASS 1)
Red visible LASER	wavelength 635 nm; output power 0.95mW (CLASS 2)
Supply Voltage	10 – 35 VDC at sensor side
Power Consumption	< 5 W
Peak Current at Power-on	1.8 A (max. 80 ms at 35 V)
Cable Length	33'
Response Time	typ. 20 ms (max. 80 ms) + output activation delay
Output	2 electronic relays (galvanic-isolated – polarity-free)
Max. switching voltage	35 VDC / 24 VAC
Max. switching current	80 mA (resistive)
Switching time	t _{ON} = 5 ms; t _{OFF} = 5 ms
Output resistance	typ 30 Ω
Voltage drop on output	< 0.7 V at 20 mA
Leakage current	< 10 μA
Input	2 optocouplers (galvanic-isolated – polarity-free)
Max. contact voltage	30 VDC (over-voltage protected)
Voltage threshold	Log. Active High: > 8 VDC Log. Active Low: < 3 VDC
Response Time	
Monitoring Input	< 5 ms
LED Activity	
Blue	Power-on
Orange	Error status
Red/Green (x2)	Detection / Output Status (green = no detection, red = detection)
Dimensions	3 5/8" x 2 3/4" x 5" (W x H x D) mounting bracket: + 1/2"
Material	PC/ASA
Color	Black

Mounting Angles on Bracket	-45°, 0°, 45°
Rotation Angles on Bracket	-5 – 5° (lockable)
Tilt Angles on Bracket	-3 – 3°
Protection Degree	NEMA 4 / IP65
Temperature Range	powered: -22 – 140 °F (-30 – 60 °C) unpowered: 14 – 140 °F (-10 – 60 °C)
Humidity	0 – 95% non-condensing
Vibrations	< 2G
Pollution on Front Screen	max. 30%, homogenous
Norm Conformity	2006/95/EC: LVD; 2002/95/EC: RoHS; 2004/108/EC: EMC; IEC 60529:2001; IEC 60825-1:2007; IEC 60950-1:2005; IEC 61000-6-2:2005; IEC 61000-6-3:2006

PRODUCT SERIES

10LZR5600	Presence detection for building automation and security
10LBA	LZR mounting bracket accessory
10INDBRACKET	Industrial mounting bracket
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10PS12-24	UL / ULC Listed power supply
10PSVR5T	Voltage regulator, 24 VAC / 24 VDC
35.1242	8-conductor cable (30')



MICROCELL ONE

PHOTO BEAMS FOR PEDESTRIAN, AUTOMATIC DOORS

Enhanced Safety on Pedestrian Doors



Easy installation on all types of pedestrian doors

User-Friendly Setup

LED indicators assist in setting up alignment

Standard Compliant

Can be mounted as low as 12 inches from the floor



Ideal for Wide Doors

Maximum range of detection of 15 feet with an 8° alignment tolerance

Compatible with BEA's BODYGUARD-T

Capable of meeting ANSI 156.10 standard for swing-door safety when paired with BEA's BODYGUARD-T

TECHNICAL SPECIFICATIONS

Technology	Active infrared
Detection Mode	Presence (beam interruption)
Min. Mounting Height	12" from floor
Min. Distance Between Beams	12" (crossed beams)
Min. Range of Detection	3'
Max. Range of Detection	15'
Alignment Tolerance	8°
Response Time	≤ 40 ms
Hold Time	300 ms
Supply Voltage	12 – 24 VAC; ±10% 12 – 24 VDC; -5% / 30%
Current Consumption	< 100 mA
Output Contact Rating	1 relay (NC / NO contacts)
Max. Contact Voltage	50 VAC/VDC
Max. Contact Current	1 A
Max. Switching Power	30 W (DC) / 60 VA (AC)
Operating Temperature	-30 – 131 °F
Immunity	
Sunlight	75,000 lux
Incandescent Lamp	25,000 lux at 8° angle
Electromagnetic Compatibility	According to 89 / 336 EEC
Dimensions	
Head Body	< 1 ⁵ / ₃₂ " (L embed) × 1 ⁵ / ₃₂ " (∅)
Head Harness	5 ⁷ / ₈ " (∅)
Control Board	3 1 ¹ / ₃₂ " (W) × 1 7 ²⁵ / ₃₂ " (H) × 2 1 ¹ / ₃₂ " (D)
Cable Length	18' (standard) 32' (optional)
Material	ABS
Degree Of Protection	NEMA 4 / IP65 (beam heads)

PRODUCT SERIES

10MICROCELL1S	Single safety beam with control box (18' cable)
10MICROCELL1SL	Single safety beam with control box (32' cable)
10MICROCELL1D	Double safety beam with control box (18' cable)
10MICROCELL1DL	Double safety beam with control box (32' cable)
10MICROCELLADAPTER	Wiring kit to retrofit BEA MICROCELL beams where Optex beams are currently installed
Must order with part number 03.0109 and the 10MICROCONTROL	
10MICROCONTROL	MICROCELL control box
10MICRO1SADAPT	MICROCELL single beam adapter kit allows for MICROCELL beams to replace Optex beams without running a new cable (1) set of MICROCELL emitter and receiver heads, (1) 10MICROCELLADAPTER, (1) 10MICROCONTROL
10MICRO1DADAPT	MICROCELL double beam adapter kit allows for MICROCELL beams to replace Optex beams without running a new cable (2) sets of MICROCELL emitters and receiver heads, (2) 10MICROCELLADAPTER, (1) 10MICROCONTROL
03.0109	3" Emitter and 3" Receiver (ordered as a set)
20.0045	Jamb cap kit with screws
20.0055	Emitter and Receiver set (32' cable)
20.0056	Emitter and Receiver set (18' cable)



R2E-100

FOCUSED ACTIVE INFRARED, REQUEST-TO-EXIT SENSOR



Standards Compliant


UL294 and ULCS319 Listed

Define Your Tilt Angle

Adjustable tilt angle from zero to 10°

Customizable Detection Zones

Adjustable detection range from 20 to 48 inches



Low-Profile Mounting

Low-profile sensor mounts on or above the door frame

Multiple Inputs

Three DRY auxiliary inputs: a push button or other request-to-exit device, a card reader or other request-to-enter device, and a door position switch

TECHNICAL SPECIFICATIONS

Detector Type	Focused, active infrared
Supply Voltage	12 – 24 VAC/VDC; ±10% at 60 Hz
Current	
Sounder OFF	155 mA
Sounder MAX VOLUME	200 mA
Temperature (UL Install)	32 – 120 °F (0 – 49 °C)
Temperature	-20 – 120 °F (-29 – 49 °C)
Humidity	
(ULCS319 Installation)	0 – 93% non-condensing
(UL294 Installation)	0 – 85% non-condensing
Detection Range*	20 – 48", adjustable via potentiometer
Relay	2 Form "C" contact sets; 1.3 A at 24 VAC / 30 VDC
Relay Hold Time	0.5 – 60 s, adjustable via potentiometer
Sounder	85 dB max, adjustable volume
LEDs	Green, red, yellow, orange
REX Input	DRY contact, NO
Card Reader Input	DRY contact, NC
Door Position Switch Input	DRY contact, NO
Dimensions	6 7/10" (W) × 1 7/10" (D) × 2" (H)
Materials	ABS, PC
Wiring Interface	JST (14-pin) with 4' cable
Norm Conformity	UL294, ULCS319 FCC Part 15 B

* R2E-100 can accommodate swing doors up to 7 feet high.

PRODUCT SERIES

10R2E-100	UL / ULC Listed, active infrared, request-to-exit detector specifically designed for access control applications
------------------	------------------------------------------------------------------------------------------------------------------



SUPERSCAN-T

DOOR MOUNTED, ACTIVE INFRARED, SAFETY SENSOR

Fit to the Application


Housing available up to 102 inches in length; can be field cut to desired door width

ANSI Compliant

Capable of meeting ANSI 156.10 standard for swing-door safety when coupled with BEA's BODYGUARD-T

Functional Design

Designed to mount at the top of the door to reduce accidental damage



Customizable

Can be set to background analysis mode to reduce the chance of false detection from faulty environmental situations

Standards Compliant

Capable of external monitoring

TECHNICAL SPECIFICATIONS

Technology	Active infrared with background suppression
Detection Mode	Presence
Measurement of Distance	Triangulation
Power Supply	12 – 24 VAC/VDC ±10%
Output Interface; Relay	Relay – max. contact rating: 1A at 30 V (resistive)
Detection Range	0 – 8'
Distance Adjustment	2 – 8' (rotating cam with linear adjustment)
Max. Mounting Height	8'
Detection Signal Duration	Infinite presence detection
Detection Time	< 50 ms
Output Hold Time	Potentiometer range: 0.1 – 4.5 s
Operating Temperature Range	-30 – 140 °F
PCB Dimensions	
Primary	10.91" (W) × 1.5" (H)
Secondary	8.75" (W) × 1.5" (H)
Connector to Door Controller	8-position screw terminal on Primary PCB
Primary-to-Secondary Connection	Flat-ribbon cable with connectors and key lock
Max. Number of Secondaries	8
Functions Selection	Detection mode: NO or NC Normal mode or Background Analysis mode

PRODUCT SERIES

See page 37...



SUPERSCAN-T INDUSTRIAL

ACTIVE INFRARED, SAFETY SENSOR



Fit to the Application

Housing available up to 96 inches; can be field-cut to desired door width

User-Defined Detection Zones

Detection zone of 24 to 96 inches

Adjustable Detection Zone




Can be set to background analysis mode to reduce the change of false detection from faulty environmental situations

Customizable Hold Time

Relay hold time can be adjusted from 0.1 to 4.5 seconds

Standards Compliant

Capable of external monitoring



TECHNICAL SPECIFICATIONS

Technology	Active infrared with background suppression
Detection Mode	Presence
Measurement of Distance	Triangulation
Power Supply	12 – 24 VAC/VDC ±10%
Output Interface; Relay	Relay – max. contact rating: 1A at 30 V (resistive)
Detection Range	0 – 8'
Distance Adjustment	2 – 8' (rotating cam with linear adjustment)
Max. Mounting Height	8'
Detection Signal Duration	Infinite presence detection
Detection Time	< 50 ms
Output Hold Time	Potentiometer range: 0.1 – 4.5 s
Operating Temperature Range	-30 – 140 °F
PCB Dimensions	
Primary	10.91" (W) × 1.5" (H)
Secondary	8.75" (W) × 1.5" (H)
Connector to Door Controller	8-position screw terminal on Primary PCB
Primary-to-Secondary Connection	Flat-ribbon cable with connectors and key lock
Max. Number of Secondaries	8
Functions Selection	Detection mode: NO or NC Normal mode or Background Analysis mode

PRODUCT SERIES

See page 37...



SUPERSCAN-T / INDUSTRIAL

ACTIVE INFRARED, SAFETY SENSOR



PRODUCT SERIES

10SSTI	1 Primary 34 ½" end cap to end cap (for 36" doors)
10SSTICUSTOM	1 Primary Custom Length (13" min.)
10SSTI40	1 Primary 40" end cap to end cap (for 42" doors)
10SSTI42	1 Primary 42" end cap to end cap (for 44" doors)
10SSTI48	1 Primary 48" end cap to end cap (for 50"+ doors)
10SSTII	1 Primary + 1 Secondary 34 ½" end cap to end cap (for 36" doors)
10SSTIICUSTOM	1 Primary + 1 Secondary Custom Length (24 ½" min.)
10SSTII40	1 Primary + 1 Secondary 40" end cap to end cap (for 42" doors)
10SSTII42	1 Primary + 1 Secondary 42" end cap to end cap (for 44" doors)
10SSTII44	1 Primary + 1 Secondary 44" end cap to end cap (for 46" doors)
10SSTII48	1 Primary + 1 Secondary 48" end cap to end cap (for 50"+ doors)
10SSTIII	1 Primary + 2 Secondaries 34 ½" end cap to end cap (for 36" doors)
10SSTIIICUSTOM	1 Primary + 2 Secondaries Custom Length (34 ½" min.)
10SSTIVCUSTOM	1 Primary + 3 Secondaries Custom Length (46 ½" min.)
10SSTSECONDARY	SUPERSCAN-T secondary unit (no housing) <i>includes ribbon connector</i>
10SSTPRIMARY	SUPERSCAN-T primary unit (no housing)
10SSQD	Quick disconnect for SUPERSCAN-T <i>one needed per door</i>

10SSHARDWARE	SUPERSCAN-T hardware kit <i>Includes cord sheath, jamb caps with screws, and end caps with screws</i>
10CAPKIT	(1) left + (1) right end caps and mounting screws
30.0015	Ribbon connector cable connects primaries and secondaries
41.3879	Adjustable mounting clips for primary and secondary
55.0001	Door cord jamb cap and screw
70.0025	Aluminum housing, ordered per inch (stocked in 102" lengths)
70.0048	Aluminum housing cut to 38 ½" (for a 40" SUPERSCAN-T)
70.0049	Aluminum housing cut to 40 ½" (for a 42" SUPERSCAN-T)
70.0050	Aluminum housing cut to 46 ½" (for a 48" SUPERSCAN-T)
70.0138	Lens piece, ordered per inch (stocked in 102" lengths)
70.0202	Standard 26" SUPERSCAN-T door cord sheath, ordered per piece
70.0203	Lens piece cut to standard 33" lens (for a 34 ½" SUPERSCAN-T)
70.0304	SUPERSCAN-T hardware kit <i>Includes cord sheath and jamb caps with screws</i>
70.0319	Lens piece cut to 38 ½" (for a 40" SUPERSCAN-T)
70.0320	Lens piece cut to 40 ½" (for a 42" SUPERSCAN-T)
70.0321	Lens piece cut to 46 ½" (for a 48" SUPERSCAN-T)



BEAMBOX

ACTIVE INFRARED, MOTION AND PRESENCE SENSOR




Off-Door Presence Detection

Three rows of five infrared spots ideal for unique off-door applications

Multiple Preset Detection Zones

Four infrared immunity modes and nine unique preset patterns are available

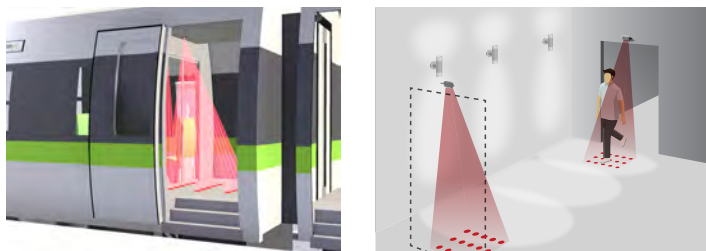


Customizable to Your Application

Typical detection area of 3 ¼ by 3 ¼ feet when mounted at a height of 7 feet

Low-Profile Design

Recessed mounting for low-profile applications

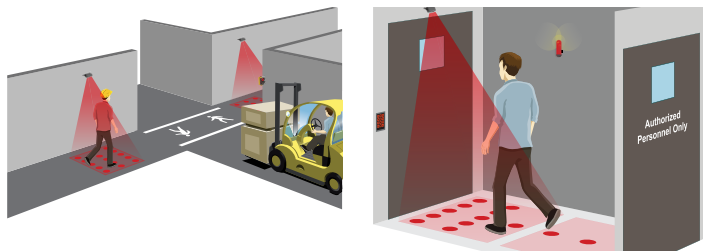

TECHNICAL SPECIFICATIONS

Technology	Active infrared with background analysis
Detection Mode	Motion and presence
Optical Features	15 independent IR spots with a diameter of typ. 0.43"
Maximum Mounting Height	8 ½' (flush mounting)
Tilt Angles	0 – 20° vertical in steps of 5°
Detection Zone	3 ¾' (W) × 3 ¾' (D) at mounting height 6 ½' with tilt angle at 20°
Reaction Time	< 100 ms
Supply Voltage	12 – 30 VAC ±10%; 12 – 45 VDC ±10%
Power Consumption	< 3 W (VA)
Output	Relay (free of potential change-over contact)
Max. Contact Voltage	42 VAC – 60 VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 60 VA (AC)
Monitoring Input	Optocoupled (free of potential)
Input Voltage	10 – 24 VDC
Input Current	< 10 mA (at 24 V)
Connection (Sensor Side)	Unpluggable, integrated 7-pin connector
Hold Time	0.5 – 9 s (adjustable)
LEDs	Red and green
Mains Frequency	50 – 60 Hz
Temperature Range	-13 – 126 °F (operating); -22 – 140 °F (storage)
Degree of Protection	IP41
Dimensions	5 ½" (W) × 1 ½" (H) × 2 ½"
Weight	3 ½ oz
Enclosure Material	PC
Color	Black
Cable Length	8'

PRODUCT SERIES


10BEAMBOX	Uses a 3 × 5 matrix of infrared spots (15 total) where each can be individually activated <i>Monitoring capable</i>
10REMOTE	Universal remote control for sensor setup
10SPOTFINDER	Active-infrared-spot finder

LZR[®]-WIDESCAN






DOWNLOAD

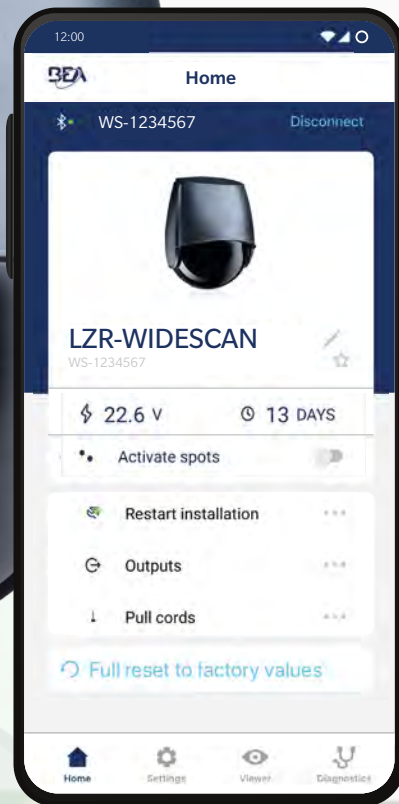

Easily configure sensor settings with the LZR-WIDESCAN mobile app. The mobile app provides a complete view of sensor settings, from field configurations to immunity.



READ MORE ON PAGE 47



IS40 / XL

MOTION AND PRESENCE SENSORS FOR INDUSTRIAL DOORS

Energy Savings

Bidirectional, unidirectional approach, and unidirectional depart microwave detection options

Adjustable Detection Settings

Six modes of detection filtering are available for microwave immunity, as well as pedestrian and parallel traffic rejection

Customizable Patterns

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment





Reduce False Detections

Adjustable infrared immunity modes mitigate environmental disturbances such as subtle door vibrations, light, and sun

Programmable Via Remote

Remote control programming enables user to quickly and safely make changes from the ground (sold separately)

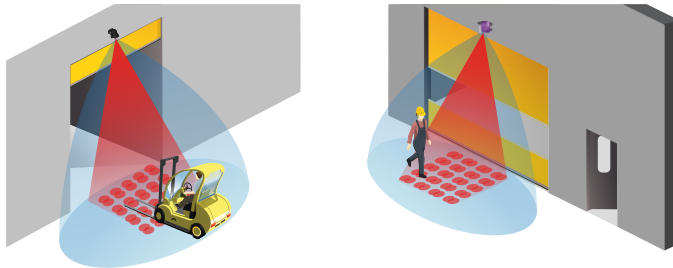

TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar	Active infrared
Detection Mode	Motion	Presence
LED Activity	Green (activation relay)	Red (presence relay)
Transmitter Frequency / Wavelength	24.150 GHz	875 nm
Transmitter Power Density	< 5mW / cm ²	< 250 mW / m ²
Max. Detection Field		
IS40	13' x 16 1/2'	10' x 10'***
IS40XL	13' x 6 1/2'*	7 1/2' x 7 1/2'***
Output Hold Time	0.5 – 9 s	0.5 s
Min. Detection Speed	2 in/s	0 in/s to activate detection
Tilt Angle	-8 – 22° (relative to sensor face)	15 – 45°
Mains Frequency	50 – 60 Hz	
Power Consumption	< 3.5 W	
Output	2 relays (free of potential change-over contact)	
Max. Contact Voltage	42 VAC/VDC	
Max. Contact Current	1 A (resistive)	
Max. Switching Power	30 W (DC) / 48 VA (AC)	
Installation Height		
IS40	8 – 16'	
IS40XL	6 1/2' – 11 1/2'	
Temperature Range	-22 – 140 °F	
Dimensions	3 3/4" (W) x 4" (H) x 5" (L)	
Materials	ABS, PC	
Cable Length	32'	
Degree of Protection	NEMA 4 / IP65	
Norm Conformity	R&TTE: 1999 / 5 / EC EMC 2004 / 108 / EEC	


* Determines field size

** Measured at 30° / Field size 9' / Mounting Height: 16'; XL: 11 1/2'

*** Zone detected with the SPOTFINDER (i.e. slightly larger than the effective detection field)

PRODUCT SERIES

10IS40	Dual technology industrial sensor utilizing microwave motion and active infrared presence detection
10IS40XL	Dual technology industrial sensor utilizing microwave motion and active infrared presence detection for low mounting heights
10INDBRACKET	Industrial mounting bracket
10MINIBRACKET	Short, adjustable mounting bracket
10SPOTFINDER	Active infrared spotfinder
10REMOTE	Universal remote control for sensor setup
35.1566	8-pin conductor cable (30')



IXIO-DT1

MOTION AND PRESENCE SENSOR FOR AUTOMATIC, SLIDING DOORS

Energy Efficient



Ten microwave activation sensitivity settings and three infrared safety immunity settings

Precise Presence Detection

Two 24 spot, high density, infrared, safety curtains providing precise presence detection

Easily Adjustable

Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

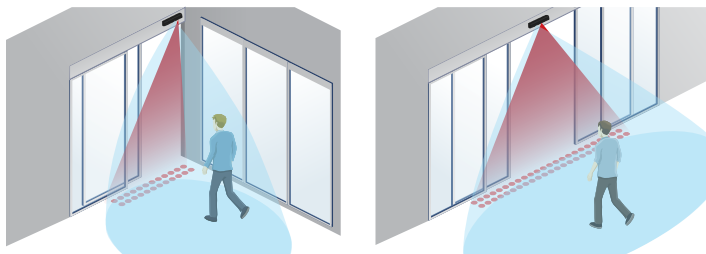

Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD

Standards Compliant

Fully monitored internally, capable of external monitoring

TECHNICAL SPECIFICATIONS


Technology	Microwave Doppler radar	Active infrared
Detection Mode	Motion	Presence
Transmitter Frequency	24.150 GHz	N/A
Transmitter Radiated Power	< 20 dBm EIRP	N/A
Transmitter Power Density	< 5 mW / cm ²	N/A
Spot Size	N/A	2" x 2"
Max. Number of Spots	N/A	24 per curtain
Max. Number of Curtains	N/A	2
Output	Electro-mechanical-relay (potential and polarity free)	Solid-state-relay (potential and polarity free)
Max. Contact Voltage	30 VDC	42 VAC/VDC
Max. Contact Current	1 A	400 mA
Hold Time	0.5 – 9 s (user adjustable)	0.3 – 1 s
Test Input		
Sensitivity	Low: < 1 V High: > 10 V (max. 30 V)	
Response time on test request:	< 5 ms (typical)	
Supply Voltage	12 – 24 VAC ±10%; 12 – 30 VDC ±10% (to be operated from SELV compatible power supplies only)	
Power Consumption	< 2.5 W	
Mounting Height	6 ½' – 11 ½'	
Temperature Range*	-13 – 131 °F 0 – 95% relative humidity, non-condensing	
Degree of Protection	IP54	
Applicable Directives	R&TTE 1999 / 5 / EC LVD 2006 / 95 / EC MD 2006 / 42 / EC ROHS 2 2011 / 65 / EU	

Dimension	10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)
Cable Length	10'
Norm Conformity	ISO 13849-1:2008 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle) IEC 61496-1:2012 ESPE Type 2

* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

PRODUCT SERIES

10IXIODT1	Dual-technology sensor for sliding doors
10ICA	IXIO ceiling accessory
10IMB	IXIO bracket accessory
10URA	Universal rain accessory
10CDA	IXIO curved door accessory
10IXIOSPACER	IXIO spacer (black)
35.1286	IXIO replacement cover (black)
35.1302	IXIO replacement cover (white)
35.1303	IXIO replacement cover (silver)
10RETROFITSPACER	Retrofit Spacer Kit (spacer, 2 ½" harness, 9" harness)
20.5349	IXIO / ULTIMO control harness (10')
20.5359	Wire harness (30')
20.5302	Optex-to-IXIO conversion harness
70.0173	IXIO wide antenna
70.0182	IXIO narrow antenna
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup



IXIO-DT1 INDUSTRIAL

MOTION AND PRESENCE SENSOR FOR INTERIOR,
INDUSTRIAL DOORS

Energy Efficient


Ten microwave activation sensitivity settings and three infrared safety immunity settings

Enhanced Accessibility

PRM mode for applications frequently used by persons with reduced mobility (e.g. wheelchair or elderly traffic)

Precise Presence Detection

Two 24-spot, high-density, infrared safety curtains providing precise presence detection

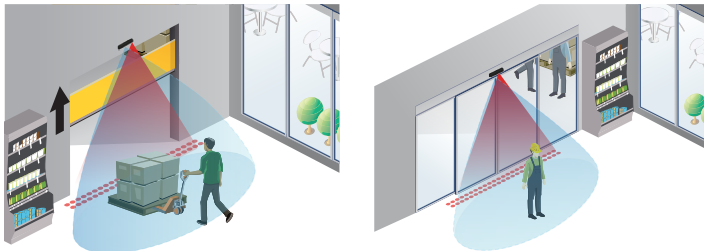

Easily Adjustable


Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD

Standards Compliant

Fully monitored internally, capable of external monitoring



TECHNICAL SPECIFICATIONS

Detection Mode	Motion minimum detection speed: 2 in/s	Presence typical response time: < 200 ms (max. 500 ms)
Technology	Microwave doppler radar Transmitter frequency: 24.150 GHz Transmitter radiated power: < 20 dBm EIRP Transmitter power density: < 5 mW/cm	Active infrared with background analysis Spot: 2" x 2" (typ) Number of spots: max. 24 per curtain Number of curtains: 2
Mounting Height	6 ½ – 11 ½' local regulations may impact acceptable mounting height (pedestrian applications only)	
Sensor Temperature Range	-13 – 131 °F 0 – 95% relative humidity, non-condensing LCD screen is operational from 14 – 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.	
Output	Relay 1 Electromechanical relay (potential and polarity free) Max. contact current: 1 A Max. contact voltage: 30 VAC Adjustable hold time: 0.5 – 9 s	Relay 2 Solid-state relay (potential and polarity free) Max. contact current: 100 mA Max. contact voltage: 42 VDC / 30 VAC
Test / Monitoring Input	Sensitivity: Low: < 1 V High: > 10 V (max. 30 V) Response time on test request: typical < 5 ms	
Supply Voltage	12 – 24 VAC ±10%; 12 – 30 VDC ±10% (to be operated from SELV compatible power supplies only)	
Power Consumption	< 2.5 W	
Noise	< 70 dB	
Degree of Protection	IP54	

FCC Certification	FCC: G9B-100606 IC: 4680A-100606
Compliance	ISO 13849 PL «C» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)

PRODUCT SERIES

10IXIODT1INDUS	Dual-technology, industrial sensor utilizing microwave motion and active infrared presence sensor. <i>Includes 30' cable.</i>
10ICA	IXIO ceiling accessory
10IMB	IXIO bracket accessory
10URA	Universal rain accessory
10CDA	IXIO curved door accessory
10IXIOSPACER	IXIO spacer (black)
35.1286	IXIO replacement cover (black)
35.1302	IXIO replacement cover (white)
35.1303	IXIO replacement cover (silver)
10RETROFITSPACER	Retrofit Spacer Kit (spacer, 2 ½" harness, 9" harness)
20.5349	IXIO / ULTIMO control harness (10')
20.5359	Wire harness (30')
20.5302	Optex-to-IXIO conversion harness
70.0173	IXIO wide antenna
70.0182	IXIO narrow antenna
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup



IXIO-DT1V

MOTION AND PRESENCE SENSOR WITH CAMERA FOR AUTOMATIC, SLIDING DOORS

Additional Camera Functionality

Provides an SDTV camera that shoots 30 frames of footage per second

Easily Integrates


Integrates with building surveillance systems

Upgrade IXIO In the Field

Video replacement kit available to upgrade any IXIO in the field

Energy Efficient

Ten microwave, activation sensitivity settings and three infrared safety immunity settings

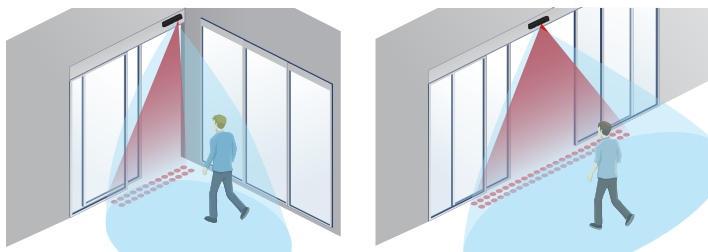

TECHNICAL SPECIFICATIONS (SENSOR)

Technology	Microwave Doppler radar	Active infrared
Detection Mode	Motion	Presence
Transmitter Frequency	24.150 GHz	N/A
Transmitter Radiated Power	< 20 dBm EIRP	N/A
Transmitter Power Density	< 5 mW / cm ²	N/A
Spot Size	N/A	2" x 2"
Max. Number of Spots	N/A	24 per curtain
Max. Number of Curtains	N/A	2
Output	Electro-mechanical-relay (potential and polarity free)	Solid-state-relay (potential and polarity free)
Max. Contact Voltage	30 VDC	42 VAC/VDC
Max. Contact Current	1 A	400 mA
Hold Time	0.5 – 9 s (user adjustable)	0.3 – 1 s
Test Input	Sensitivity	
	Low: < 1 V; High: > 10 V (max. 30 V)	
	Response time on test request:	
	< 5 ms (typical)	
Supply Voltage*	12 – 24 VAC ±10%; 12 – 30 VDC ±10%	
Power Consumption	< 2.5 W	
Mounting Height	6 ½ – 11 ½'	
Temperature Range**	-13 – 131 °F 0 – 95% relative humidity, non-condensing	
Degree of Protection	IP54	
Norm Conformity	R&TTE 1999 / 5 / EC LVD 2006 / 95 / EC	MD 2006 / 42 / EC ROHS 2 2011 / 65 / EU
Dimension	10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)	
Cable Length	10'	

* To be operated from SELV-compatible power supplies only

** LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.



Enhanced Accessibility

PRM mode for applications frequently used by persons with reduced mobility (e.g. wheelchair or elderly traffic)

Precise Presence Detection

Two 24-spot, high-density, infrared safety curtains providing precise presence detection

Standards Compliant

Fully monitored internally, capable of external monitoring



TECHNICAL SPECIFICATIONS (CAMERA)

Voltage Regulator	6.6 – 36 VDC ±10%, 6 – 28 VAC ±10%
Operating Temperature	-22 – 140 °F (max. RH: 95%)
Video Output	1.0 (Vp-p) / 75Ω
Image Sensor	CMOS
Horizontal Resolution	480 TVL
NTSC Output	720 (H) x 480 (V)
Sync System	Inter-Sync
Frame Rate	30 fps
Minimum Illumination	0.01 LUX
AE Control	Auto
Gain Control	Auto
Electronic Shutter	1 s ~ 1/10,000 s
S/N Ratio	> 50 dB
AWB	Auto

PRODUCT SERIES

10IXIODT1V	IXIO-DT1 with integrated video
10IMB	IXIO bracket accessory
10CDA	IXIO curved door accessory
10IXIOSPACER	IXIO spacer (black)
10RETROFITSPACER	Retrofit Spacer Kit (spacer, 2 ½" harness, 9" harness)
20.5349	IXIO / ULTIMO control harness (10')
20.5359	Wire harness (30')
20.2009	IXIO-DT1V camera harness and power supply (8')
70.0173	IXIO wide antenna
70.0182	IXIO narrow antenna
10MINIBRACKET	Short, adjustable mounting bracket
10REMOTE	Universal remote control for sensor setup

LOOKING OUT
FOR YOU



ULTIMO

AUTOMATIC SLIDING DOOR SENSOR WITH
EXTENDED / ENHANCED SAFETY



Extended
Safety



Enhanced
Safety



Easy
Installation



Convenient
Programming



Standards
Compliant

READ MORE ON PAGE 48



LZR®-WIDESCAN

MOTION, PRESENCE, AND SAFETY SENSOR FOR INDUSTRIAL DOORS

Easy Setup


Utilize mobile app to easily configure sensor settings (available on the Apple App Store and Google Play Store)

Energy Efficient

Promotes energy savings by reducing false detections and unnecessary door cycling, helping to regulate HVAC

Virtual Pull Cord

Virtual pull-cord function can differentiate between pedestrian and vehicle traffic and can provide pulse-on-stop activation

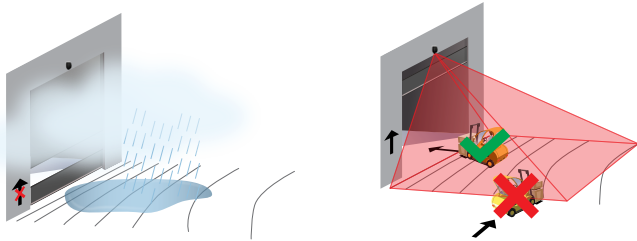


Alternative Solution

Ideal for replacing costly and labor-intensive induction loop and pull-cord solutions

Visible Spots

Two visible LASER alignment spots ensure accurate pattern placement

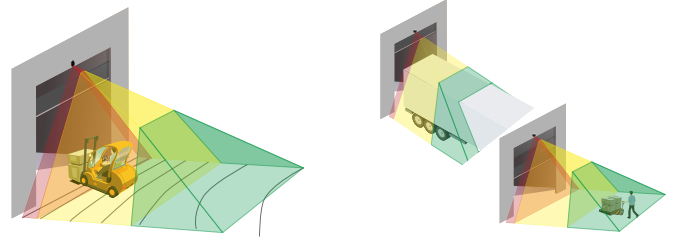


TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement (7 LASER curtains)
Detection Mode	Motion, presence, height, and speed
Max. Detection Field	
Width / Depth	1.2 x mounting height (adjustable depending on user settings)
Thickness of First Curtain	¼"
Typ. Mounting Height	6'6" – 32'
Typ. Minimum Object Size	6" at 19'6" (in proportion to object distance)
Test Body Dimensions	27 ½" x 11 ¾" x 7 ¾"
Min. Reflectivity Factor	> 2% (of floor and object) (measured at max. 19'6" in safety field)
Emission Characteristics	
IR LASER	Wavelength 905 nm; output power 0.10mW (CLASS 1)
Red Visible LASER	Wavelength 635 nm; output power 0.95mW (CLASS 2)
Supply Voltage	12 – 24 VAC -10/+20% 12 – 30 VDC ±10% at sensor terminal
Power Consumption	
Heating: Off	< 2.5 W
Heating: Eco or Auto	< 10 W, max 15 W
Response Time	Typ. 230 ms; max. 800 ms (depending on immunity settings)
Output	2 solid-state relays (galvanic isolation, polarity free) 24 VAC / 30 VDC (max. switching voltage) – 100 mA (max. switching current) - in switching mode: NO / NC - in frequency mode: pulsed signal (f= 100 Hz ±10%) 1 electro-mechanic relay (galvanic isolation, polarity free) 42 VAC/VDC (max. switching voltage) – 500 mA (max. switching current)
Input	30 VDC (max. switching voltage) low < 1 V high > 10 V (voltage threshold)

Bluetooth Communication	Operating bandwidth: 2402 - 2480 MHz Max. transmitted power: 12 dBm
LED Activity	
Tri-colored (x2)	Output status / Remote control response / Error signals
Blue	Bluetooth status
Dimensions	7 ¾" (H) x 6" (W) x 4" (D) (approx.)
Materials	PC, ASA
Color	Black
Rotation Angles on Bracket	45° to the right, 15° to the left (lockable)
Tilt Angles on Bracket	-10 – 5°
Degree of Protection	NEMA 4 / IP65
Temperature Range	-22 – 140 °F
Norm Conformity	IEC 61000-6-2 IEC 60825-1 IEC 61000-6-3 IEC 62061 SIL 2 IEC 60950-1 ISO 13849-1 Pl "d" / CAT2

PRODUCT SERIES

10LZRWIDESCAN	Motion, presence, and safety sensor
10WBA	Universal mounting bracket
10WBAMOUNT	Universal mounting bracket plate
10INDBRACKET	Industrial mounting bracket ADAPTER PLATE KIT (10.1311) IS REQUIRED
10MINIBRACKET	Short, adjustable mounting bracket
10.1311	Adapter plate kit
35.1554	30' cable
35.1555	50' cable
41.8838	LZR-WIDESCAN replacement base
35.0245	LZR-WIDESCAN replacement cover
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10REMOTE	Universal remote control for sensor setup



ULTIMO

AUTOMATIC SLIDING DOOR SENSOR WITH EXTENDED AND ENHANCED SAFETY

Enhanced Safety


Positioning the inner, infrared safety curtain through the threshold allows for sustained presence detection in the door opening

When directed through the threshold, the inner, infrared safety curtain provides presence detection while the door is fully open and partial detection during the closing door cycle

Easy Installation

Eight visible, red, alignment spots are projected onto the ground, verifying the location of the infrared curtains and helping to increase the accuracy of setup

Sensors automatically synchronize infrared frequency with ULTI-SYNC functionality, streamlining installation and retrofit applications*

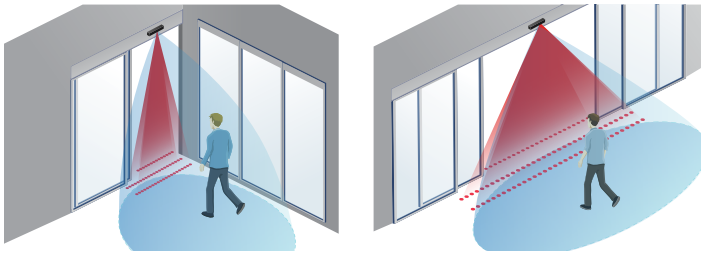

TECHNICAL SPECIFICATIONS

Mounting Height	6'6" – 11'6"
Detection Mode	Motion and presence
Technology	Microwave Doppler radar and active infrared (AIR) with background analysis
Radar Detection Speed (min)	2 in/s
AIR Response Time (typ.)	< 200 ms (max. 500 ms)
Radar Transmitter	
Frequency	24.150 GHz
Radiated Power	< 20 dBm EIRP
Power Density	< 5 mW / cm ²
Lobe Angles	0 – 45° (typical adjustment), default 25°
AIR Spots	
Size	2" x 2" (typ.)
Number of Spots	max. 32 per curtain
Number of Curtains	3
Curtain Angles	-3 – 11°, default 0°
Relay Output 1	Electro-mechanical-relay (potential and polarity free)
Max. Contact Voltage	30 VDC
Max. Contact Current	1 A
Hold Time	0.5 – 9 s
Optofet Output 2	Solid-state-relay (potential and polarity free)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	400 mA
Hold Time	0.3 – 1 s
Test / Monitoring Input	
Sensitivity	Low: < 1 V; High: > 10 V (max. 30 V)
Response Time on Request	Typical: < 5 ms
Supply Voltage	12 – 24 VAC ±10% 12 – 30 VDC ±10%
Power Consumption	< 3.2 W



Convenient Programming

Easily define the microwave pattern shape, adjust the infrared curtain width, and review troubleshooting diagnostics via a menu-driven LCD


Extended Safety

Three infrared curtains offer deeper and broader safety coverage in front of the door panels

Standards Compliant

Fully monitored internally, capable of external monitoring complying with ANSI 156.10

* ULTI-SYNC is cross-compatible with BEA and other sliding door sensors on the market.

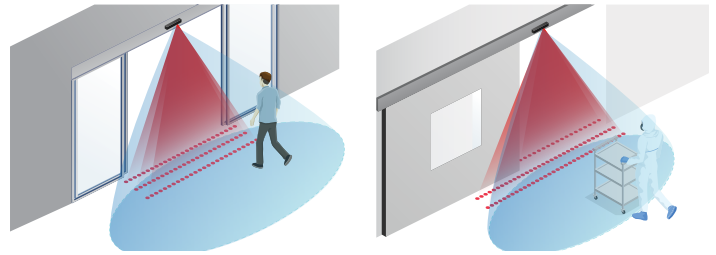

Temperature Range*	-13 – 131 °F 0 – 95% relative humidity, non-condensing
Cable Length / Gauge	10' / 26 AWG
Degree of Protection	IP54
Norm Conformity	R&TTE 1999 / 5 / EC MD 2006 / 42 / EC LVD 2006 / 95 / EC ROHS 2 2011 / 65 / EU

* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

PRODUCT SERIES

10ULTIMO	Dual-technology sensor for sliding doors
10RETROFITSPACER	Retrofit Spacer Kit (spacer, 2 ½" harness, 9" harness)
10ULTIMOSPACER	ULTIMO spacer
10OURA	Universal rain accessory
10UMB	ULTIMO mounting bracket
10.1351	ULTIMO replacement cover
20.5349	IXIO / ULTIMO control harness (10')
10REMOTE	Universal remote control for sensor setup



FC

FDA

LZR®-U920 / U921



COMPACT, RAW DATA, LASER SCANNER

Background Independent

Background or substrate has limited effect on measurements

LASER-Based Measurements

Measurement range: up to 213 ft (65 m)



Uni-Directional or Bi-Directional

Standard RS485 bus communication (bi-directional)

Superior Object Recognition

No external illumination of target object necessary as compared to camera systems

TECHNICAL SPECIFICATIONS

Technology	LASER scanner, Time-of-Flight measurement
Measurement Range	30' (10 m) at 2% remission factor 98' (30 m) at 10% remission factor 213' (65 m) max.
Number of Points/Plane	Max. 274
Number of Planes	LZR®-U920 LZR®-U921
	4 1
Angular Resolution	Max. 0.3516°
Angular Coverage	Max. 96°
Rotating Speed	900 turns / min
Scanning Frequency	LZR®-U920 LZR®-U921
	15 Hz 60 Hz
Serial Communication	
Type	Asynchronous
Interface	RS 485
Communication Mode	Half-duplex (U920,U921)
Data Transmission Speed	460800 bit / sec (max. 921600 bit / sec)
Topology	Point-to-point
Symbol Coding	1 start bit, 1 stop bit, no parity bit
File Type	8 bits
Remission Factor	> 2%
Emission Characteristics	
IR LASER	Wavelength 905 nm; output power 0.10mW (CLASS 1)
Visible LASER	Wavelength 635 nm; output power 0.95mW (CLASS 2)
Peak Current at Power-on	1.8 A (max. 80 ms at 35 V)
Supply Voltage	10 – 35 VDC at sensor side
Power Consumption	< 5 W
Cable Length	10'
LED Activity	
Blue	Power-on status
Orange	Error status
Bi-colored (x2)	Function status
Dimensions	5" (W) × 2 ¾" (H) × 3 ½" (D)
Materials	PC, ASA
Color	Black

Degree of Protection	NEMA 4 / IP65
Temperature Range	-22 – 40 °F (-30 – 60 °C) if powered 14 – 140 °F (-10 – 60 °C) if unpowered
Humidity	0 – 95% non-condensing
Vibrations	< 2 G
Norm Conformity	2006 / 95 / EC: LVD 2011 / 65 / EU: RoHS 2 2004 / 108 / EC: EMC EN 60529:2001 IEC 60825-1:2007 Laser Class 1&3R EN 60950-1:2005 EN 61000-6-2:2005 EMC - Industrial level EN 61000-6-3:2006 EMC - Commercial Level

PRODUCT SERIES

10LZR0920	Bidirectional, four-curtain sensor
10LZR0921	Bidirectional, one-curtain sensor
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10PSVR5T	Voltage regulator, 24 VAC / 24 VDC

LASER SCANNER FOR VIRTUAL LOOP APPLICATIONS

LZR[®]-H100



BEA's LZR[®]-H100 is a LASER-based Time-of-Flight sensor designed for gate and barrier applications. This solution provides four LASER-based curtains, offering a three dimensional detection zone for accurate object detection. Its detection curtains are highly-configurable and can be set up for activation and presence detection in vehicle sensing applications.

The LZR-H100 is an effective alternative to induction loops and is housed in an IP65 rated enclosure, further ensuring its performance in outdoor environments.

[READ MORE ON PAGE 28](#)



**HIGH PRECISION
PRESENCE**



**GROUND LOOP
ALTERNATIVE**



**INDOOR / OUTDOOR
INSTALLATION**



**TRAJECTORY
DETECTION**



BR2-900

2-RELAY, LOGIC MODULE + 900 MHz, WIRELESS TECHNOLOGY



Flexible

Sequenced or simultaneous relay activation for application flexibility

Convenient

2 AMP relays allow the direct release of an electric locking device wirelessly, eliminating the need for a separate logic module or isolation relay




Feature Rich

Extended Hold Mode allows wireless push plates to function like hardwired push plates (if push plate is held, relay does not time out)

Saves Time and Money

Wireless functionality eliminates the need to run input wires directly to the logic module

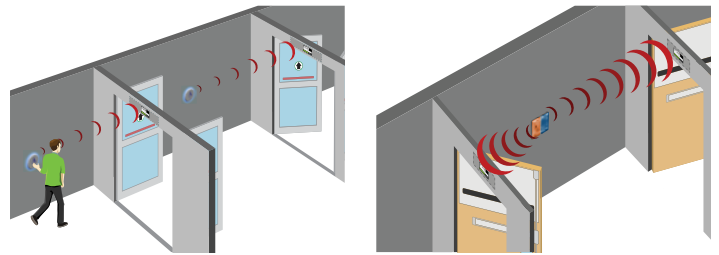

TECHNICAL SPECIFICATIONS

Supply Voltage	12 – 24 VAC/VDC ±10%
Current Consumption	45 mA DC 75 mA AC
Frequency	908 – 918 MHz (frequency hooping)
Emitted Radio Power	-25 dBm (TX)
Power Consumption	0.5 – 1.5 W
Programmable Transmitters Per Receiver	75 (unlimited for 900 MHz Universal Transmitter)
Temperature Rating	-22 – 158 °F (-30 – 70 °C)
Input	
Day / Night (24 hr)	DRY contact
AUX	DRY contact
Contact Rating	
Relay 1 DPDT / Relay 2 DPDT	2 A at 30 VDC or 2 A at 24 VAC
LED Activity	
Blue	Relay 1 activation
White	Relay 2 activation
Red	Radio frequency / Learn
Tri-color	Signal strength
Certification	FCC, IC
Dimensions	5 1/8" (W) × 1" (H) × 2 1/8" (D)
Housing	ABS (white translucent)

PRODUCT SERIES

10BR2-900	2-relay logic module
10TD900HH1	Handheld transmitter, 900 MHz, 1-button (3-volt battery)
10TD900HH2	Handheld transmitter, 900 MHz, 2-button (3-volt battery)
10TD900HH3	Handheld transmitter, 900 MHz, 3-button (3-volt battery)
10TD900HH4	Handheld transmitter, 900 MHz, 4-button (3-volt battery)
10TD900HH1U	Universal, 900 MHz transmitter
10T900PB	Wired, 900 MHz transmitter with flag connector (2 AAA batteries)
109TD900TR	900 MHz, touchless-retrofit transmitter



BR3-X

PROGRAMMABLE, 3-RELAY, LOGIC MODULE



Integrated Relays

Two 3 AMP relays and one 1 AMP relay, all with built-in surge suppression, eliminate the need for external components when installing some electric locking devices

Customizable


Versatility with 13 programmable logic functions

On-Board Power

WET output with AC/DC voltage for powering an electric locking device directly from the module

Intuitive Programming

Two-button programming combined with dual seven-segment display provides simple setup

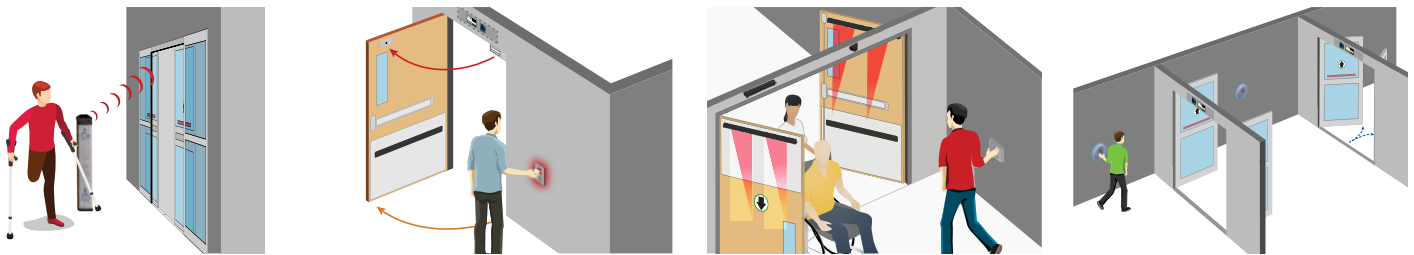

TECHNICAL SPECIFICATIONS

Supply Voltage	12 – 24 VAC/VDC ±10%
Power Consumption	30 – 130 mA; DRY Output
Temperature Range*	-15 – 150 °F
Dimensions	5 1/8" (W) x 1" (H) x 2 1/8" (D)
Relay Hold Time	Up to 60 seconds per relay
Delay Between Relays	Up to 60 seconds per relay with 1/4, 1/2 and 3/4 second options
Housing Material	ABS
Input Specification	
Inputs 1, 2, 3, 4	DRY contact
WET Input	5 – 24 VAC/VDC ±10%
Contact Rating	
Relay 1 (DRY)	3 A at 24 VAC / 30 VDC
Relay 1 (WET)	1 A
Relay 2	3 A at 24 VAC / 30 VDC
Relay 3	1 A at 24 VAC / 30 VDC

* If powered by AC voltage and using WET output to convert to DC voltage and current draw of device is greater than 0.9 A, the upper temperature range is 130 °F.

PRODUCT SERIES

- 10BR3X** Programmable 3-relay logic module offering 13 functions, including day/night mode and normally locked and normally unlocked restroom modes
See page 101 for Restroom Kit and page 100 for Emergency Add-On Kit.

LOCK-OUT MODULES

SWING-DOOR LOGIC USED WITH OVERHEAD PRESENCE SENSORS




BODYGUARD-T Inhibition

Used to inhibit header-mounted safety sensors (BODYGUARD-T) while door is in closing cycle

Built-in Door Position Recognition

Analyzes motor voltage



Optional Safety Beam Input

To override inhibit signal during door closing

TECHNICAL SPECIFICATIONS

Power Supply	12 – 24 VAC / 15 – 24 VDC
Operating Frequency	4 MHz (microprocessor)
Power Consumption	10 mA at rest, 50 mA max.
Output	2x SPST relays
Max. Voltage - Relay Contact	60 VDC / 120 VAC
Max. Current - Relay Contacts (both)	2 ADC, 0.5 AAC

PRODUCT SERIES

10LO21	Lock-out relay
10LO21P	Universal lock-out relay for PARALLAX packages
10LE21	Low-energy lockout module
15.0075	Harness for LO21 and LO21P



MATRIX FAMILY

UL LISTED, LOOP DETECTORS



Two Loop Models Available


Available in single- or dual-loop models

Dual Outputs

Two relay outputs

Vehicle Detection, Direction, and Counting

Ideal for vehicle directionality and sequencing applications

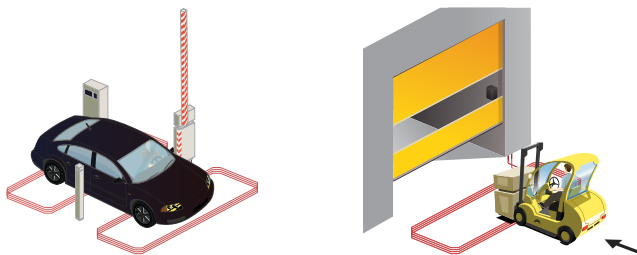


Easy to Adjust

Settings are adjusted via two ease-to-use potentiometers

Feature Rich

Pulse-on-entry and pulse-on-exit presence detection

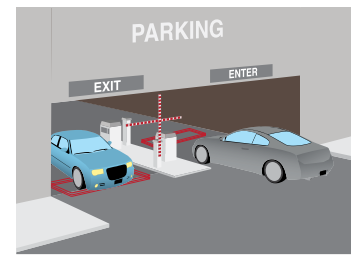

TECHNICAL SPECIFICATIONS

Tuning	Automatic
Connector	11-pin male (86CP11)
Presence Time	1 min – infinity
Pulse Time Output	100 ms or 500 ms
LED Activity	
Green	Power
Red	Loop Status 1 / Loop Status 2
Frequency Range	20 kHz – 130 kHz
Frequency Steps	
Single Loop	4
Double Loop	2 (for each loop)
Sensitivity (ΔL/L)	0.005 – 0.5%
Reaction Time	
Single Loop	25 ms
Double Loop	50 ms (each channel)
Setup Time After Configuration	2 s max by channel
Power Supply (depending on model)	12 – 24 VAC/VDC ±10% 115 VAC ±10%
Power Frequency	48 – 62 Hz
Power Consumption	< 2.5 W
Temperature Range	-22 – 158 °F (-30 – 70 °C)
Protections	Loop insulation transformer Zener diodes Gas discharge clamping
Inductance Range	20 – 1000 μH
Connection	86CP11 (standard 11-pin, round)
Relay Outputs	2 (free potential change-over contact) Max. Contact Voltage 230 VAC Max. Contact Current 5 A (resistive)
Setup Time at Power On	
MATRIXD/S	8 s max by channel
MATRIXIS	8 s max by channel
MATRIX-3S	1.6 s max by channel
MATRIX-3D	2.2 s max by channel

Norm Conformity	R&TTE: 1999 / 5 / EC EMC: 89 / 336 / EEC EMC: 89 / 336 / EE EMC: 2004 / 108 / EC FCC: 47 CFR 15 IC: RSS-210 ISSUE 5 UL Listed equipment for UL508
Degree of Protection	IP40
Weight	7 oz
Dimensions	1 ½" (W) × 3" (H) × 3" (D)

PRODUCT SERIES

10MATRIXD110	Dual-loop detector (110 – 120 VAC)
10MATRIXD1224	Dual-loop detector (12 – 24 VAC)
10MATRIXIS110	Single-loop detector (110 – 120 VAC)
10MATRIXIS1224	Single-loop detector (12 – 24 VAC)
10MATRIX-3-D	Dual-loop detector (12 – 24 VAC) <i>socket NOT included</i>
10MATRIX-3-S	Single-loop detector (12 – 24 VAC) <i>socket NOT included</i>
10MATRIXHARN	MATRIX harness, 11-pin, 72" (6') length
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10PSST242	Plug-in power supply
70.0262	11-pin, socket-based, DIN rail



FCC

CE

300 MHz FAMILY

300 MHz, WIRELESS TRANSMITTERS AND RECEIVERS



TECHNICAL SPECIFICATIONS

Frequency	300 MHz
Radio Control Type	Analog
Input Voltage	24 VAC/VDC
Operating Temperature	14 – 131 °F (-10 – 55 °C)
Setup	10 DIP switch, access code programming
Power	
10T300HHX	(1) 9-volt battery
10T300KEYCHAIN	(1) 12-volt battery
10T300MINIPB	(1) 12-volt battery
10T300PB	(1) 9-volt battery
Receiver Dimensions	
Without Flange	4 9/10" (L) × 3 1/2" (W) × 1 2/5" (H)
With Flange	5 2/5" (L) × 3 1/2" (W) × 1 2/5" (H)
Norm Conformity	CE, FCC, IC


PRODUCT SERIES

10R300	300 MHz analog receiver
10T300HH	Handheld transmitter, 1-button (9-volt battery)
10T300HHDBL	Handheld transmitter, 2-button (9-volt battery)
10T300HH4	Handheld transmitter, 4-button (9-volt battery)
10T300KEYCHAIN	Keychain transmitter, 1-button (12-volt battery)
10T300MINIPB	Miniature, hardwired transmitter, 1-button (12-volt battery)
10T300PB	Wired transmitter, no case, with flag connectors (9-volt battery)
70.0260	Energizer battery, 12-volt
70.0261	Energizer battery, 9-volt



433 MHz FAMILY

433 MHz, WIRELESS TRANSMITTERS AND RECEIVERS

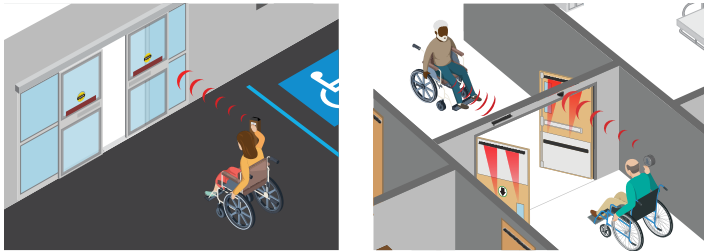

TECHNICAL SPECIFICATIONS

Frequency	433 MHz
Radio Control Type	Digital
Emitted Radio Power	-28.7 dBm (transmitter)
Power Consumption	3mA (transmitter); 30mA (receiver)
Power	
Hardwire	1 9-volt or 3-volt battery
Handheld	1 3-volt battery
Input Voltage	12 – 24 VAC/VDC (receiver)
Contact Rating	1.0 A at 30 VDC 0.5 A at 125 VAC 0.3 A at 60 VDC
Operating Temperature	14 – 131 °F (-10 – 55 °C)
Capacity	100 programmed transmitters (per receiver)
LED Activity	
Red	Receiver/Transmitter learn
Blue	Relay activity
Dimensions	
Receiver	2 1/8" (W) x 1" (H) x 2 3/4" (D)
Transmitter	1 3/8" (W) x 3/5" (H) x 2 3/4" (D)
Norm Conformity	CE, FCC, IC

PRODUCT SERIES

10RD433	433 MHz analog receiver
10RD433EH	433 MHz analog receiver with extended hold time
10TD433HH1	Handheld transmitter, 433 MHz, 1-button (3-volt battery)
10TD433HH2	Handheld transmitter, 433 MHz, 2-button (3-volt battery)
10TD433HH3	Handheld transmitter, 433 MHz, 3-button (3-volt battery)
10TD433HH4	Handheld transmitter, 433 MHz, 4-button (3-volt battery)
10TD433PB3V	Wired, 433 MHz transmitter with flag connector (3-volt battery)
10TD433PB9V	Wired, 433 MHz transmitter with flag connectors (9-volt battery)
30.5124	Lithium coin battery, 3-volt
70.0261	Energizer battery, 9-volt



900 MHZ FAMILY

LONG-RANGE, WIRELESS TRANSMITTERS AND RECEIVER



Signal Strength Indicator


Multi-color LEDs on receiver provide installer with visual notification of signal strength and activation status

Consistent Transmission

Frequency hopping allows consistent transmission in areas with other 900 MHz devices

Enhances Accessibility

Offers a means of activation for those with limited mobility or disabilities

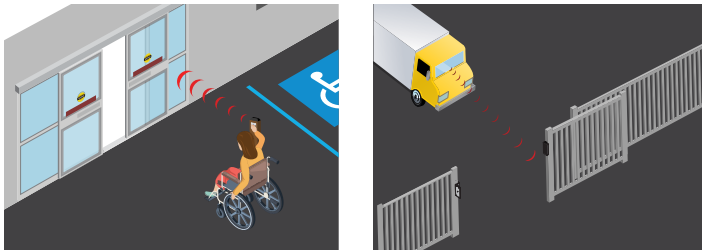

Variety of Accessories


1, 2, 3, and 4 button handheld transmitters provide flexibility where multiple receivers are used

Extended Hold Functionality

Extended hold and toggle/pulse functionality is integrated for various application needs

Learn Modes

Delay and no-delay learn modes provide either instant or delayed activation for the sequencing of doors

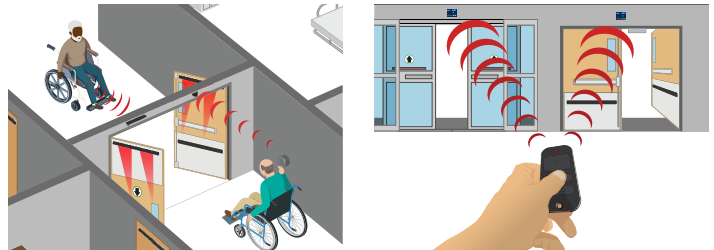

TECHNICAL SPECIFICATIONS

Frequency	908 – 918 MHz (frequency hopping)	
Radio Control Type	Digital	
Power Consumption		
Standard	30mA (TX) / 40mA (RX)	
Industrial	13mA (TX) / 40mA (RX)	
Retrofit	22 mA	
Universal	30mA	
Supply Voltage	12 – 24 VAC/VDC	
Contact Rating	1.0 A at 30 VDC 0.3 A at 60 VDC 0.5 A at 125 VAC	
Operating Temperature	14 – 131 °F (-10 – 55 °C)	
Transmitter Capacity (per receiver)		
Programmable (std)	75	
Universal	Unlimited	
LED Activity	Receivers:	Transmitters:
	Red = receiver learn	Red = transmitting
	Blue = relay activation	Red Blinking = low battery
	Tri-color = signal strength	
Dimensions		
Transmitter	Standard Handheld: 2 3/4" (W) x 1 1/8" (D) x 1/25" (H) Standard Push-Plate Transmitter: 1 3/4" (W) x 1" (D) x 3/16" (H) Industrial Handheld: 1 1/2" (W) x 3" (D) x 1/2" (H) Retrofit: 1 1/8" (W) x 1 3/8" (D) x 1/25" (H)	
Receiver	RD900: 2 1/2" (W) x 2" (D) x 3/4" (H)	
Norm Conformity	All: FCC, IC Industrial Handheld: IP65	

PRODUCT SERIES

10RD900	900 MHz receiver module
10TD900HH1	Handheld transmitter, 900 MHz, 1-button (3-volt battery)
10TD900HH2	Handheld transmitter, 900 MHz, 2-button (3-volt battery)
10TD900HH3	Handheld transmitter, 900 MHz, 3-button (3-volt battery)
10TD900HH4	Handheld transmitter, 900 MHz, 4-button (3-volt battery)
10TD900HH1U	Universal, 900 MHz transmitter
10TD900INDHH1	Handheld transmitter, 900 MHz, 1-button (NEMA 4 rated)
10TD900INDHH2	Handheld transmitter, 900 MHz, 2-button (NEMA 4 rated)
10TD900INDHH3	Handheld transmitter, 900 MHz, 3-button (NEMA 4 rated)
10TD900INDHH4	Handheld transmitter, 900 MHz, 4-button (NEMA 4 rated)
10T900PB	Wired, 900 MHz transmitter with flag connector (2 AAA batteries)
109TD900TR	900 MHz, touchless-retrofit transmitter
10BELTCLIP	Belt clip compatible with the industrial, handheld transmitters
30.5124	Lithium coin battery, 3-volt

PLATES & ACCESSORIES

PUSH PLATE FAMILY

4.5" ROUND



4.5" SQUARE



4.75" SQUARE



36" HIGH-LOW



4.75" VESTIBULE



LPR36 FAMILY IS COMPATIBLE WITH BOLLARDS
*AVAILABLE IN HARDWIRED AND WIRELESS (900, 433 OR 300 MHZ) MODELS.

6" ROUND



6" SQUARE



SINGLE GANG (2.75" x 4.5")




JAMB (1.5" x 4.75")



CHERRY SWITCH VERSIONS SHOWN
*ALSO AVAILABLE IN HARDWIRED AND MICROSWITCH VERSIONS

BOLLARDS

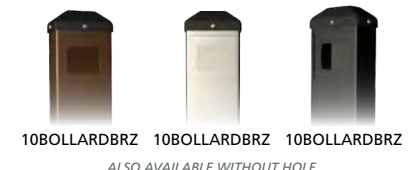

4 1/2" ROUND AND SQUARE PUSH PLATES

STAINLESS STEEL ACTUATORS

Robust Design


1/16 inch thick stainless steel for maximum durability

Vandal Resistant

Concealed fasteners to minimize vandalism

Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

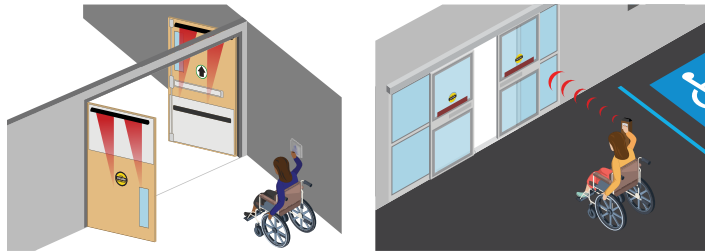

TECHNICAL SPECIFICATIONS

Faceplate Material	Stainless steel (16 gauge, 304 2B)
Backplate Material	Aluminum (1/8" thick)
Mounting Screws	Stainless steel, 6-32 x 1" and 8-32 x 1" Allen head size: 5/64
Cherry Switch	Single-pole, 1 A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz
Dimensions	
Round	4 1/2" (W) x 3 1/50" (D)
Square	4 1/2" (W) x 4 1/2" (H) x 3 1/50" (D)

MOUNTING OPTIONS

10BOX45SQFM	Flush-mount box (4 1/2" square)
10BOX45SQSM	Surface-mount box (4 1/2" square)
10BOX45RNDFM	Flush-mount box (4 1/2" round)
10BOX45RNDSM	Surface-mount box (4 1/2" round)
10ESCUTCHEON45	Stainless steel mounting option, used in place of mounting box
10WRRND45	Weather ring (4 1/2" round)



Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



PRODUCT SERIES

10PBR45	4 1/2" round, stainless steel plate with blue "Push to Open" text
10PBR451	4 1/2" round, stainless steel plate with blue accessibility logo and "Push to Open" text
10PBR4510	4 1/2" round, stainless steel, plain plate
10PBR45LL	4 1/2" round, stainless steel plate with blue accessibility logo
10PBS45	4 1/2" square, stainless steel plate with blue "Push to Open" text
10PBS451	4 1/2" square, stainless steel plate with blue accessibility logo and "Push to Open" text
10PBS4510	4 1/2" square, stainless steel, plain plate
10PBS45LL	4 1/2" square, stainless steel plate with blue accessibility logo
10PBS45POD	4 1/2" square, stainless steel plate with black "Press to Operate Door" text
10PBS45B	4 1/2" square, stainless steel plate with white "Push to Open" text
10PBS451B	4 1/2" square, stainless steel plate with white accessibility logo and "Push to Open" text
10PBS451AL	4 1/2" square, stainless steel plate with alternative, blue accessibility logo

4 3/4" SQUARE PUSH PLATES

STAINLESS STEEL ACTUATORS



Robust Design


1/16 inch thick stainless steel for maximum durability

Vandal Resistant

Concealed fasteners to minimize vandalism

Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

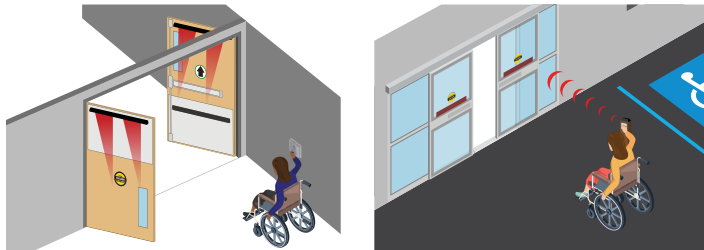

Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



TECHNICAL SPECIFICATIONS

Faceplate Material	Stainless steel (16 gauge, 304 2B)
Backplate Material	Aluminum (1/8" thick)
Mounting Screws	Stainless steel, 6-32 x 1" and 8-32 x 1" Allen head size: 5/64
Cherry Switch	Single-pole, 1 A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz

MOUNTING OPTIONS

10BOX475SQSMEBA	Surface-mount box (4 3/4" square) with easy battery access
10BOX475SQFM	Flush-mount box (4 3/4" square)
10BOX475SQSM	Surface-mount box (4 3/4" square)
10WRSQ475	Weather ring (4 3/4" square)

PRODUCT SERIES

10PBS	4 3/4" square, stainless steel plate with blue "Push to Open" text
10PBS1	4 3/4" square, stainless steel plate with blue accessibility logo and "Push to Open" text
10PBS10	4 3/4" square, stainless steel, plain plate
10PBSLL	4 3/4" square, stainless steel plate with blue accessibility logo
10PBSE	4 3/4" square, stainless steel plate with blue "Push to Exit" text
10PBS1B	4 3/4" square, stainless steel, blue plate with white accessibility logo and "Push to Open" text
10PBS1SB	4 3/4" square, stainless steel plate (BHMA finish 606, satin brass) with blue accessibility logo and "Push to Open" text
10PBS1AL	4 3/4" square, stainless steel plate with alternative, blue accessibility logo
20.0044	Screw kit for all 4 3/4" square plates include: (2) #6 and (2) # 8 screws (2) flag connectors (1) hex key
50.5016	Adapter ring

6" ROUND AND SQUARE PUSH PLATES

STAINLESS STEEL ACTUATORS

Robust Design


1/16 inch thick stainless steel for maximum durability

Vandal Resistant

Concealed fasteners to minimize vandalism

Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

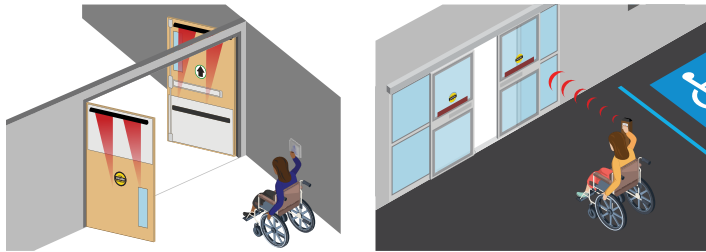

TECHNICAL SPECIFICATIONS

Faceplate Material	Stainless steel (16 gauge, 304 2B)
Backplate Material	Aluminum (1/8" thick)
Mounting Screws	Stainless steel, 6-32 x 1" and 8-32 x 1" Allen head size: 5/64
Cherry Switch	Single-pole, 1 A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz

MOUNTING OPTIONS

10BOX6SQFM	Flush-mount box (6" square)
10BOX6SQSM	Surface-mount box (6" square)
10BOX6RNDFM	Flush-mount box (6" round)
10BOX6RNDSM	Surface-mount box (6" round)
10WRRND6	Weather ring (6" round)



Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



PRODUCT SERIES

10PBR	6" round, stainless steel plate with blue "Push to Open" text
10PBR1	6" round, stainless steel plate with blue accessibility logo and "Push to Open" text
10PBR10	6" round, stainless steel, plain plate
10PBRLL	6" round, stainless steel plate with blue accessibility logo
10PBR1AL	6" round, stainless steel plate with alternative, blue accessibility logo
10PBS6	6" square, stainless steel plate with blue "Push to Open" text
10PBS61	6" square, stainless steel plate with blue accessibility logo and "Push to Open" text
10PBS610	6" square, stainless steel, plain plate
10PBS6LL	6" square, stainless steel plate with blue accessibility logo
20.0044	Screw kit for all 4 3/4" square plates include: (2) #6 and (2) # 8 screws (2) flag connectors (1) hex key

JAMB PUSH PLATES

STAINLESS STEEL ACTUATORS



Robust Design


1/16 inch thick stainless steel for maximum durability

Vandal Resistant

Concealed fasteners to minimize vandalism

Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

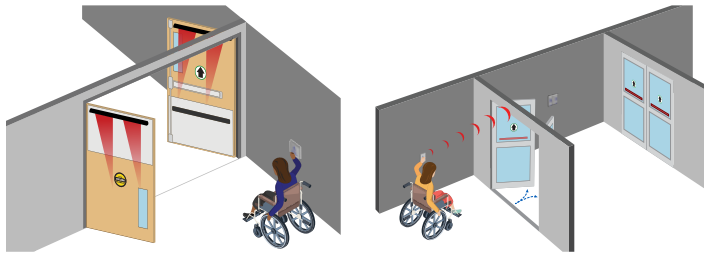

Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic and logo options available



TECHNICAL SPECIFICATIONS

Faceplate Material	Stainless steel (16 gauge, 304 2B)
Backplate Material	Aluminum (1/8" thick)
Mounting Screws	Stainless steel, 6-32 x 1" and 8-32 x 1" Allen Head Size: 3/64
Cherry Switch	Single-pole, 1 A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz
Dimensions	1 1/2" (W) x 4 3/4" (H) x 31/50" (D)

MOUNTING OPTIONS

10BOXJAMBFM	Flush-mount, jamb box (1 1/2" x 4 3/4" jamb)
10BOXJAMBSM	Surface-mount, jamb box (1 1/2" x 4 3/4" jamb)
10BOXJAMBST	Surface-mount, jamb box - hardwired only (1 3/4" x 4 1/2" jamb) <i>Compatible only with 10PBJMS series and MAGIC SWITCH jamb plates</i>

Be sure to match push plate dimensions with box dimensions - not all push plates are compatible with all mounting boxes.

PRODUCT SERIES

10PBJ	1 1/2" x 4 3/4" jamb, stainless steel push plate with blue "Push to Open" text
10PBJ1	1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo and "Push to Open" text
10PBJ10	1 1/2" x 4 3/4" jamb, stainless steel, plain push plate
10PBJL	1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo
10PBJE	1 1/2" x 4 3/4" jamb, stainless steel push plate with blue "Push to Exit" text
10PBJ1B	1 1/2" x 4 3/4" jamb, stainless steel, blue push plate with white accessibility logo and "Push to Open" text
10PBJM1	1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo and "Push to Open" text <i>Includes microswitch with 2-stud touch points</i>
10PBJML	1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo <i>Includes microswitch with 2-stud touch points</i>
10PBJMSLL	1 3/4" x 4 1/2" jamb, stainless steel push plate with blue accessibility logo <i>Includes microswitch with 2-stud touch points</i>
10PBJMS1	1 3/4" x 4 1/2" jamb, stainless steel push plate with blue accessibility logo and "Push to Open" text <i>Includes microswitch with 2-stud touch points</i>
10PBJSREV	1 3/4" x 4 1/2" jamb, stainless steel push plate with "Push to Slow" text with braille

LPR36 PUSH PLATE

FULL LENGTH, 36 INCH, HIGH-LOW ACTUATOR

Enhances Accessibility

Offers a mean of activation of automatic doors for those with limited mobility or disabilities

Low Profile, Aesthetically Pleasing Design

Low-profile (1 inch deep) design helps prevent accidental damage in high traffic areas

Standard Compliant, High-Accessibility Plate

Exceeds California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c

Versatile Mounting

Easily installs on either walls or bollards for maximum mounting flexibility



TECHNICAL SPECIFICATIONS

Contact Configurations	SPST N.O.
Switching Voltage	0.1 – 50 VDC
Switching Capacity	1 W
Switching Current	0.005 – 100 mA DC
Operation Temperature	-32 – 212 °F (-35 – 100 °C)
Materials	
Base	Aluminum (6063)
Face Plate	Stainless steel (304)
Switch Actuator	Nylon (66)
End Cap	ABS (UL94)
Hardware	Stainless steel
Compliance	California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c



Easily Converts to Wireless

Available with convenient, built-in, wireless transmitter (300, 433, or 900 MHz frequencies) for wireless activation applications

Full-Length Activation

Activation area of 36 by 6 inches (216 square inches)

Not recommended for use in an environment where it will be directly exposed to water (e.g. outdoor, not protected from direct rain).



PRODUCT SERIES

10LPR36-300	36" vertical, actuation bar with text and logo + 300 MHz Wireless
10LPR36L-300	36" vertical, actuation bar with logo only + 300 MHz Wireless
10LPR36-433	36" vertical, actuation bar with text and logo + 433 MHz Wireless
10LPR36L-433	36" vertical, actuation bar with logo only + 433 MHz Wireless
10LPR36-900	36" vertical, actuation bar with text and logo + 900 MHz Wireless
10LPR36L-900	36" vertical, actuation bar with logo only + 900 MHz Wireless
10LPR36-HW	36" vertical, actuation bar with text and logo (hardwired only)
10LPR36L-HW	36" vertical, actuation bar with logo only (hardwired only)
10LPRCAPKIT	Top and bottom replacement caps for the LPR36
10R300	300 MHz analog receiver
10RD433	433 MHz analog receiver
10RD433EH	433 MHz analog receiver, extended hold time
10RD900	900 MHz receiver module
10WCK433	Wireless conversion kit, converts hardwired to 433 MHz Wireless
10WCK900	Wireless conversion kit, converts hardwired to 900 MHz Wireless



PANTHER PUSH PLATES

PUSH PLATES WITH INTEGRATED WIRELESS TECHNOLOGY




Wireless Compatibility

Reduces installation time by eliminating the need to run wires from the push plate or use additional mounting hardware

Enhanced Accessibility

Offers a means of activation of automatic doors for those with limited mobility or disabilities

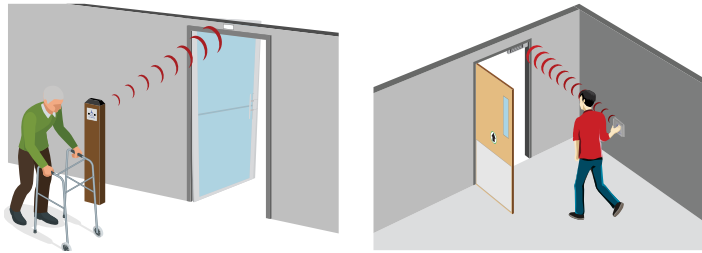

TECHNICAL SPECIFICATIONS

Dimensions	
6" Round	6 1/8" (Ø) × 1 9/20" (D)
4.75" Round	5 3/25" (Ø) × 1 21/50" (D)
4.75" Square	5 3/25" (W) × 5 3/25" (H) × 1 21/50" (D)
Weight	
6" Round	1.2 lbs
4.75" Round	1.14 lbs
4.75" Square	1.04 lbs
Mounting Options	
	Surface or bollard
Transmitter Frequency*	
	433 MHz or 900 MHz**
Power	
433 MHz	(1) 12 V type A23
900 MHz	(2) CR2032
Materials	
Faceplate	Stainless steel (16 gauge, 304 2B)
Housing	ABS
Degree of Protection	
	IP65 FCC IC Part 15 Approved

* Corresponding frequency receiver required.

** See 433 MHz and 900 MHz User's Guides for more information on BEA's wireless transmitters and receivers.

Vandal Resistant

Concealed fasteners minimize vandalism

Weather Rated

IP65-rated housing creates a weather-resistant barrier that enables the push plates to be mounted in outdoor environments or wash-down applications

PRODUCT SERIES

10EMR475	4 3/4" round, "Push to Open" text only; with integrated 433 MHz transmitter
10EMR475-900	4 3/4" round, "Push to Open" text only; with integrated 900 MHz transmitter
10EMR475L	4 3/4" round, accessibility logo only; with integrated 433 MHz transmitter
10EMR475L-900	4 3/4" round, accessibility logo only; with integrated 900 MHz transmitter
10EMR4751	4 3/4" round, "Push to Open" text and accessibility logo; with integrated 433 MHz transmitter
10EMR4751-900	4 3/4" round, "Push to Open" text and accessibility logo; with integrated 900 MHz transmitter
10EMR6	6" round, "Push to Open" text only; with integrated 433 MHz transmitter
10EMR6-900	6" round, "Push to Open" text only; with integrated 900 MHz transmitter
10EMR6L	6" round, accessibility logo only; with integrated 433 MHz transmitter
10EMR6L-900	6" round, accessibility logo only; with integrated 900 MHz transmitter
10EMR61	6" round, "Push to Open" text and accessibility logo; with integrated 433 MHz transmitter
10EMR61-900	6" round, "Push to Open" text and accessibility logo; with integrated 900 MHz transmitter
10EMS475	4 3/4" square, "Push to Open" text only; with integrated 433 MHz transmitter
10EMS475-900	4 3/4" square, "Push to Open" text only; with integrated 900 MHz transmitter
10EMS475L	4 3/4" square, accessibility logo only; with integrated 433 MHz transmitter
10EMS475L-900	4 3/4" square, accessibility logo only; with integrated 900 MHz transmitter
10EMS4751	4 3/4" square, "Push to Open" text and accessibility logo; with integrated 433 MHz transmitter
10EMS4751-900	4 3/4" square, "Push to Open" text and accessibility logo; with integrated 900 MHz transmitter
15.5039	Spare PCB for PANTHER plate - 433 series
15.5142	Spare PCB for PANTHER plate - 900 series

SINGLE GANG PUSH PLATES

STAINLESS STEEL ACTUATORS

Robust Design


1/16 inch thick stainless steel for maximum durability

Vandal Resistant

Concealed fasteners to minimize vandalism

Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

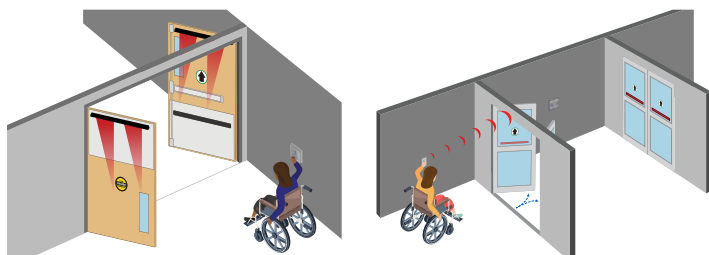

TECHNICAL SPECIFICATIONS

Faceplate Material	Stainless steel (16 gauge, 304 2B)
Backplate Material	Aluminum (1/8" thick)
Mounting Screws	Stainless steel, 6-32 x 1" and 8-32 x 1" Allen head size: 5/64
Cherry Switch	Single-pole, 15 A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz



Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



PRODUCT SERIES

10PBO241	Single-gang, stainless steel push plate with blue accessibility logo and "Push to Open" text
10PBO2410	Single-gang, stainless steel, plain push plate
10PBO24L	Single-gang, stainless steel push plate with blue accessibility logo
10PBO24E	Single-gang, stainless steel push plate with blue "Push to Open" text

MOUNTING OPTIONS

10BOX24SGSM	Standard single-gang, surface-mount box (2 3/4" x 4 1/2")
--------------------	-----------------------------------------------------------

VESTIBULE PLATES

STAINLESS STEEL ACTUATORS




Robust Design

1/16 inch thick stainless steel for maximum durability

Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

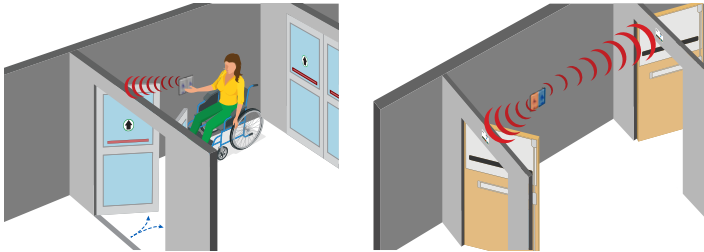

TECHNICAL SPECIFICATIONS

Faceplate Material	Stainless steel (16 gauge, 304 2B)
Backplate Material	Aluminum (1/8" thick)
Mounting Screws	Stainless steel, 6-32 x 1" and 8-32 x 1" Allen head size: 5/64
Cherry Switch	Single-pole, 15 A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433, or 300 MHz
Dimensions	4 3/4" (W) x 4 3/4" (H) x 3 1/50" (D)

Vandal Resistant

Concealed fasteners to minimize vandalism

Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

PRODUCT SERIES

10PBDGP1	Stainless steel dual Push Plate for vestibule includes: One (1) adapter ring, two (2) separate Push Plates with "Push to Open" text and accessibility logo <i>Requires two (2) 10TD433PB3V or two (2) 10TD900PB transmitters</i>
-----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

MOUNTING OPTIONS

10BOX475SQSMEBA	Surface-mount box (4 3/4" square) with easy battery access <i>Adapter ring 50.5016 required</i>
10BOX475SQSM	Surface-mount box (4 3/4" square) <i>Adapter ring 50.5016 required</i>
10BOX475SQFM	Flush-mount box (4 3/4" square) <i>Adapter ring 50.5016 required</i>
10BOXDGSM	Surface-mount box, double gang <i>Adapter ring 50.5016 required</i>
10BOLLARD SERIES	Bollard (see page 103)
50.5016	Adapter ring

HANDS-FREE DOOR ACTIVATION

MAGIC SWITCH



GO TOUCHLESS AT WAVETOOPEN.COM

A healthcare practitioner has her hands full. A person with limited mobility might run into challenges with accessibility. And others rather not touch public surfaces. As we run from point A to point B, we often don't think about opening doors. That is until we have to. Let's worry less and make door activation easier by the wave of a hand.

BEA's MAGIC SWITCH® Family provides a highly accessible and germ-free door activation without physical contact. Reduce touchpoints in fast-paced environments that depend on sanitation and hands-free access like healthcare, retail, industrial and commercial settings.

READ MORE ON PAGES 68 - 75



**HANDS-FREE
ACTIVATION**



**DURABLE
FACEPLATE**



**ADJUSTABLE
DETECTION ZONE**



**ENVIRONMENTAL
IMMUNITY**



**BATTERY-POWERED
MODELS AVAILABLE**



MS09


IP65 RATED, MICROWAVE, TOUCHLESS ACTUATOR

Weather-Resistant Housing

IP65 enclosure capable of use in industrial and extreme environments, as well as wash-down facilities

Adjustable Detection Zone

User-defined detection zone from 4 to 24 inches (pulse or toggle)



Appropriate for All Environments

Can be used in a variety of indoor and outdoor applications

No Mounting Accessories Needed

External mounting boxes are not required

TECHNICAL SPECIFICATIONS

Technology	Microwave motion sensor
Radiated Frequency	24.125 GHz
Radiated Power Density	< 5 mW / cm ²
Supply Voltage	12 – 24 VAC ±10% 12 – 24 VDC +30% / -10% <i>(to be operated from SELV-compatible power supplies only)</i>
Supply Frequency	50 – 60 Hz
Power Consumption	< 1.5 W
Output	Relay with switch-over contact (voltage-free)
Max. Contact Voltage	60 VDC / 125 VAC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 60 VAC
Detection Range*	4 – 24" (adjustable)
Detection Mode	Motion (bidirectional)
Output Hold Time	0.5 – 30 sec
Temperature Range	-4 – 131 °F (-20 – 55 °C)
Weight	0.34 lbs
Materials	ASA, PC
Degree of Protection	IP65
Certification	EMC: 2004 / 108 / EC FCC: G9B-210161 IC: 4680A-210161

* See User's Guide.

PRODUCT SERIES

10MS09TL	Mmicrowave cell with single-gang, white faceplate (text and logo)
10MS09L	Microwave cell with single-gang, white faceplate (logo only)
10RD900	900 MHz receiver module
10TD900TR	900 MHz retrofit transmitter



MS31

MICROWAVE, TOUCHLESS ACTUATOR WITH ADJUSTABLE RANGE AND RELAY HOLD TIME

Adjustable Detection Zone

Detection zone from 4 to 24 inches (timed or toggle)

Adjustable LED Setting

DIP switch position determines if LED illuminates when in detection or when not in detection

Silent Activation

Silent activation for hospitals and other noise-sensitive environments



TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Radiated Frequency	24.125 GHz
Radiated Power Density	< 5 mW / cm ²
Detection Mode	Motion (bidirectional)
Detection Range	4 – 24" (adjustable)
Output	Relay with switch-over contact (voltage-free)
Max. Contact Voltage	60 VDC / 125 VAC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 60 VA (AC)
Output Hold Time	0.5 – 30 s
Supply Frequency	50 – 60 Hz
Supply Voltage	12 – 24 VAC ±10%, 12 – 24 VDC +30% / -10%
Power Consumption	< 1.5 W
Weight	0.34 lbs
Materials	PC, PE
Temperature Range	-4 – 131 °F (-20 – 55 °C)
IP Rating	IP54
Dimensions	
Single Gang	4 ½" (H) × 2 ¾" (W) × ¼" (T)
Jamb Plate	4 ½" (H) × 1 ¾" (W) × ¼" (T)
Double Gang	4 ½" (H) × 4 ½" (W) × ¼" (T)
Round Plate	6" (D) × ¼" (T)
Certification	EMC: 2004 / 108 / EC FCC: G9B-210161 IC: 4680A-210161



Durable Design

IP54-rated enclosure for protection against outdoor weather and daily cleaning

Various Faceplates Available

Available in black, gray, and white faceplate; options include jamb style, single gang, double gang, and 6 inch round

PRODUCT SERIES

10MS31U-B	Single gang and double gang faceplates kit (text and logo, black)
10MS31U-G	Single gang and double gang faceplates kit (text and logo, gray)
10MS31U-W	Single gang and double gang faceplates kit (text and logo, white)
10MS31J-B	Jamb faceplate kit (text and logo, black)
10MS31J-G	Jamb faceplate kit (text and logo, gray)
10MS31J-W	Jamb faceplate kit (text and logo, white)
10MS31R-B	6" round faceplate kit (text and logo, black)
10MS31R-G	6" round faceplate kit (text and logo, gray)
10MS31R-W	6" round faceplate kit (text and logo, white)
10RD900	900 MHz receiver module
10TD900TR	900 MHz retrofit transmitter
MS31CUSTOM	MS31 kit with microwave cell and choice of accessibility logo or plain in any size/shape options

See next page for optional faceplate styles...

PRODUCT SERIES

70.5869	Single gang faceplate (plain, black)	70.5843	Double gang faceplate (plain, gray)
70.5833	Single gang faceplate (text and hand logo, black)	70.5844	Double gang faceplate (text and hand logo, gray)
70.5834	Single gang faceplate (text and accessibility logo, black)	70.5845	Double gang faceplate (text and accessibility logo, gray)
70.5872	Jamb faceplate (plain, black)	70.5851	6" round faceplate (plain, gray)
70.5825	Jamb faceplate (text and hand logo, black)	70.5852	6" round faceplate (text and hand logo, gray)
70.5826	Jamb faceplate (text and accessibility logo, black)	70.5853	6" round faceplate (text and accessibility logo, gray)
70.5870	Double gang faceplate (plain, black)	70.5838	Single gang faceplate (plain, white)
70.5841	Double gang faceplate (text and hand logo, black)	70.5839	Single gang faceplate (text and hand logo, white)
70.5842	Double gang faceplate (text and accessibility logo, black)	70.5840	Single gang faceplate (text and accessibility logo, white)
70.5871	6" round faceplate (plain, black)	70.5830	Jamb faceplate (plain, white)
70.5849	6" round faceplate (text and hand logo, black)	70.5831	Jamb faceplate (text and hand logo, white)
70.5850	6" round faceplate (text and accessibility logo, black)	70.5832	Jamb faceplate (text and accessibility logo, white)
70.5835	Single gang faceplate (plain, gray)	70.5846	Double gang faceplate (plain, white)
70.5836	Single gang faceplate (text and hand logo, gray)	70.5847	Double gang faceplate (text and hand logo, white)
70.5837	Single gang faceplate (text and accessibility logo, gray)	70.5848	Double gang faceplate (text and accessibility logo, white)
70.5827	Jamb faceplate (plain, gray)	70.5854	6" round faceplate (plain, white)
70.5828	Jamb faceplate (text and hand logo, gray)	70.5855	6" round faceplate (text and hand logo, white)
70.5829	Jamb faceplate (text and accessibility logo, gray)	70.5856	6" round faceplate (text and accessibility logo, white)

See page 74 for mounting options...

MS31 CUSTOM KIT (MS31CUSTOM + 70.XXXX)





MS41

STAINLESS STEEL, TOUCHLESS ACTUATOR WITH ADJUSTABLE RANGE AND RELAY HOLD TIME

Durable Faceplate


Stainless steel faceplate increases durability and protection from daily cleaning

Ideal For Harsh Environments

IP55-rated enclosure capable of use in industrial and extreme wash-down environments

High Visibility

Animated- or static-illuminated ring allows for high-visibility in low light areas

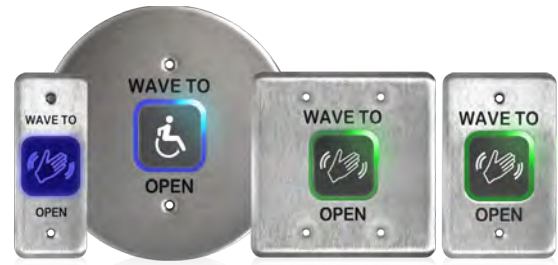

Adjustable Detection Zone

Adjustable sensing zone from 4 to 24 inches (timed or toggle)

Activation Alerts

Adjustable, audible alert setting, including silent-mode required for hospitals and other noise-sensitive environments

Adjustable Hold Time

Configurable output hold time of ½ to 30 seconds allowing unique, user-defined device placement



TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler radar
Radiated Frequency	24.125 GHz
Radiated Power Density	< 5 mW/cm ²
Detection Mode	Motion (bidirectional)
Detection Range	4 – 24" (adjustable)
Output	Relay with switch-over contact (voltage-free)
Max. Contact Voltage	60 VDC / 125 VAC
Max. Contact Current	1A (resistive)
Max. Switching Power	30 W (DC) / 60 VA (AC)
Output Hold Time	0.5 – 30 s
Supply Frequency	50 – 60 Hz
Supply Voltage	12 – 24 VAC ±10% 12 – 24 VDC +30% / -10%
Power Consumption	< 1.5 W
Wire Gauge	26 – 22 AWG
Weight	0.34 lbs
Material	Stainless steel
Temperature Range	-4 – 131 °F
IP Rating*	IP55 <i>Apply silicone to achieve IP65</i>
Dimensions	
Single Gang	4 ½" (H) × 2 ¾" (W) × ¾" (T)
Jamb	4 ½" (H) × 1 ¾" (W) × ¼" (T)
Double Gang	4 ½" (H) × 4 ½" (W) × ¾" (T)
Round	6" (D) × ¾" (T)
Cube	2 ¼" (H) × 1 ⅜" (W) × 1 ⅞" (T)
Certification	EMC: 2004 / 108 / EC FCC: G9B-210161 IC: 4680A-210161

* See Users Guide.

MS41 Single, Double, and Round adapter bracket 70.5236 is included in the box.
Adapter bracket can be used to replace a mud ring whose opening measures less than 2".

PRODUCT SERIES

10MS41-S	Single gang, stainless steel faceplate (text and hand logo)
10MS41-SA	Single gang, stainless steel faceplate (text and accessibility logo)
10MS41-SP	Single gang, stainless steel faceplate (plain)
10MS41-SPAL	Single gang, stainless steel faceplate (accessibility logo)
10MS41-SPHL	Single gang, stainless steel faceplate (hand logo)
10MS41-J	Jamb, stainless steel faceplate (text and hand logo)
10MS41-JA	Jamb, stainless steel faceplate (text and accessibility logo)
10MS41-JP	Jamb, stainless steel faceplate (plain)
10MS41-JPAL	Jamb, stainless steel faceplate (accessibility logo)
10MS41-JPHL	Jamb, stainless steel faceplate (hand logo)
10MS41-D	Double gang, stainless steel faceplate (text and hand logo)
10MS41-DA	Double gang, stainless steel faceplate (text and accessibility logo)
10MS41-DP	Double gang, stainless steel faceplate (plain)
10MS41-DPAL	Double gang, stainless steel faceplate (accessibility logo)
10MS41-DPHL	Double gang, stainless steel faceplate (hand logo)
10MS41-R	6" round, stainless steel faceplate (text and hand logo)
10MS41-RA	6" round, stainless steel faceplate (text and accessibility logo)
10MS41-RP	6" round, stainless steel faceplate (plain)
10MS41-RPAL	6" round, stainless steel faceplate (accessibility logo)
10MS41-RPHL	6" round, stainless steel faceplate (hand logo)
10TD900TR	900 MHz retrofit transmitter

See page 74 for mounting options...



MS51

BATTERY-POWERED, TOUCHLESS ACTUATOR

Best-in-Class Battery Life

3-year battery life provides uninterrupted operation in the field

Reduce False Detections

Built-in redundant sensor ensures consistent detection in the event of environmental interference such as window pollution

Selectable immunity modes mitigate environmental disturbances such as rain, water spray, and snow

Advanced light-cancellation feature reduces false detections from direct sun and light in exposed areas



Easy Installation & Setup

Quick push-plate retrofit reduces installation time and cost

Three-step process simplifies installers' time in the field

Robust Construction

Stainless steel faceplate and IP65 rating for harsh environments



TECHNICAL SPECIFICATIONS

Technology	Active infrared
number of IR sensors	2
Detection Range	8" (20cm) max.
Battery Life	3 years (at 150 activations per day)
Product Temperature Range	-22 – 158 °F (-30 – 70 °C)
Output	1 electronic relay (galvanic isolation - polarity free)
max. switching voltage	42 VAC/VDC
max. switching current	100 ma
Power Supply	3 VDC (2 AA batteries, each ~1.5 V max.)
Power Consumption	< 0.5 mW (when idle) < 12 mW (upon activation)
Wire Gauge	26-16 AWG
Dimensions (overall)	
Single Gang	4 1/2" (H) x 2 3/4" (W) x 1 1/4" (T)
Double Gang	4 1/2" (H) x 4 1/2" (W) x 1 1/4" (T)
Round	6" (H/W) x 1 1/4" (T)
Jamb	4 1/2" (H) x 1 3/4" (W) x 1 1/4" (T)
Materials	Stainless Steel 304 and PC
Weight	Single gang: 0.34 lb Double gang: 0.55 lb Round: 0.71 lb Jamb: 0.29 lb
IP Rating	IP65

PRODUCT SERIES

10MS51-S	Actuator with single-gang plate
10MS51-D	Actuator with double-gang plate
10MS51-R	Actuator with round plate
10MS51-J	Actuator with jamb plate
10MS51-SA	Single gang, with text and accessibility logo
10MS51-SAF	Single gang, with French text and accessibility logo
10MS51-SP	Single gang, plain
10MS51-ST	Single gang, with text only
10MS51-DA	Double gang, with text and accessibility logo
10MS51-DP	Double gang, plain
10MS51-DT	Double gang, with text only
10MS51-RA	Round, with text and accessibility logo
10MS51-RP	Round, plain
10MS51-RT	Round, with text only
10MS51-JA	Jamb, with text and accessibility logo
10MS51-JP	Jamb, plain
10MS51-JT	Jamb, with text only
10RD900	900 MHz receiver module
10BR2-900	2-relay logic module
10TD900PB	900 MHz hardwired transmitter

See page 74 for mounting options...



MS51W

BATTERY-POWERED, TOUCHLESS ACTUATOR WITH BUILT-IN, 900 MHz TRANSMITTER

Best-in-Class Battery Life

3-year battery life provides uninterrupted operation in the field*

Built-in, Wireless Transmitter

Integrated 900 MHz transmitter reduces installation time**
900 MHz wireless technology provides greater line-of-sight transmission distance for reliable activation

Easy Installation & Setup

Completely wireless solution reduces overall installation time and cost

Three-step process simplifies installers' time in the field



Enhanced Performance Features

Built-in redundant sensor ensures consistent detection in the event of environmental interference such as window pollution
Selectable immunity modes mitigate environmental disturbances such as rain, water spray, and snow
Advanced light-cancellation feature reduces false detections from direct sun and light in exposed areas

Robust Construction

Stainless steel faceplate and IP65 rating for harsh environments

* certain combinations of settings can affect maximum battery life

** corresponding wireless receiver sold separately



TECHNICAL SPECIFICATIONS

Technology	Active infrared
number of IR sensors	2
Radio Control Type	Digital
Frequency	908 – 918 MHz (frequency hopping)
Emitted Radio Power	-25 dBm (transmitter)
Detection Range	
Long Range (default)	12" (30.5cm) max. (2 year maximum battery life, at 150 activations per day)
Short Range	6" (15.24cm) max. (3 year maximum battery life, at 150 activations per day)
Product Temperature Range	-22 – 158 °F (-30 – 70 °C)
Power Supply	3 VDC (2 AA batteries, each ~1.5 V max.)
Power Consumption	< 0.5 mW (when idle) < 12 mW (upon activation)
Dimensions (overall)	
Single Gang	4 ½" (H) x 2 ¾" (W) x 1 ¼" (T)
Double Gang	4 ½" (H) x 4 ½" (W) x 1 ¼" (T)
Round	6" (H/W) x 1 ¼" (T)
Jamb	4 ½" (H) x 1 ¾" (W) x 1 ¼" (T)
Materials	Stainless Steel 304 and PC
Weight	Single gang: 0.34 lb Double gang: 0.55 lb Round: 0.71 lb Jamb: 0.29 lb
IP Rating	IP65
FCC Certification	FCC: 2ABWS-10TD900PB IC: 4680A-10TD900PB

PRODUCT SERIES

10MS51W-S	Actuator with single-gang plate
10MS51W-D	Actuator with double-gang plate
10MS51W-R	Actuator with round plate
10MS51W-J	Actuator with jamb plate
10MS51W-SA	Single gang, with text and accessibility logo
10MS51W-SAF	Single gang, with French text and accessibility logo
10MS51W-SP	Single gang, plain
10MS51W-ST	Single gang, with text only
10MS51W-DA	Double gang, with text and accessibility logo
10MS51W-DP	Double gang, plain
10MS51W-DT	Double gang, with text only
10MS51W-RA	Round, with text and accessibility logo
10MS51W-RP	Round, plain
10MS51W-RT	Round, with text only
10MS51W-JA	Jamb, with text and accessibility logo
10MS51W-JP	Jamb, plain
10MS51W-JT	Jamb, with text only
10RD900	900 MHz receiver module
10BR2-900	2-relay logic module

ADDITIONAL OPTIONS

10MS51W-SKIT	Kit includes: (2) 10MS51W-S sensors (2) 10MSBOXSGSM boxes (1) 10RD900 receiver
10MS51W-DKIT	Kit includes: (2) 10MS51W-D sensors (2) 10MSBOXDGSMB boxes (1) 10RD900 receiver

See page 74 for mounting options...

MAGIC SWITCH MOUNTING BOXES

SURFACE-MOUNT BOXES FOR MAGIC SWITCH PRODUCTS



MAGIC SWITCH Family Compatibility*

Surface-mount boxes compatible with all faceplate styles for MS31, MS41, MS51, and MS51W

Ideal for Harsh Environments**


IP65-rated, capable for indoor and outdoor usage providing a water-resistant, dust tight enclosure

Various Sizes Available

Available in single-gang, double-gang, round, and jamb sizes

Practical Design

Surface-mount boxes work in places where it may not be practical to add a wall box



TECHNICAL SPECIFICATIONS

Dimensions

Single Gang	4 9/16" (H) x 2 13/16" (W) x 1 7/8" (D)
Double Gang	4 17/32" (H) x 3" (W) x 1 7/16" (D)
Round	6 1/32" (H/W) x 1 7/16" (T)
Jamb	4 9/16" (H) x 1 13/16" (W) x 1 12/32" (D)

* See Users Guide

** To achieve an IP65 rating, you must apply silicone to any drilled holes.

PRODUCT SERIES

10MSBOXSGSM	Single-gang, surface-mount box for MAGIC SWITCH products
10MSBOXDGSM	Double-gang, surface-mount box for MAGIC SWITCH products
10MSBOXRNDISM	Round, surface-mount box for MAGIC SWITCH products
10MSBOXJAMBSM	Jamb, surface-mount box for MAGIC SWITCH products



MS51W ONE-BOX SOLUTIONS

Offering convenient kits for easy ordering, stocking and door automation. Kits include single gang or double gang faceplates, corresponding MAGIC SWITCH Surface-Mount Boxes and a 900 MHz Wireless Receiver.

WHAT'S INCLUDED



MS51W S-KIT

- 2** Single-gang MS51W faceplates
- 2** MAGIC SWITCH SURFACE-MOUNT BOXES
- 1** 900 MHz Receiver Module



MS51W D-KIT

- 2** Double-gang MS51W faceplates
- 2** MAGIC SWITCH SURFACE-MOUNT BOXES
- 1** 900 MHz Receiver Module



LEARN MORE



BEA-MS51.com

ACCESS CONTROL PUSH BUTTON

ILLUMINATED, REQUEST-TO-EXIT BUTTON




Easier Light Bulb Replacement

Easily replaced 12 to 24 VAC/VDC light bulb, reducing whole-product replacement

Durable Faceplate

Stainless steel faceplate

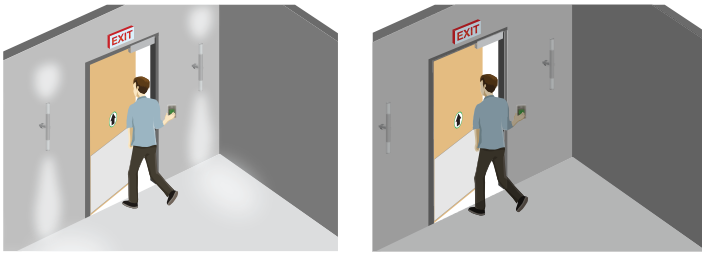

Secure

Vandal- and tamper-resistant design

Reliable

Tested to perform more than one million operations

TECHNICAL SPECIFICATIONS


Switch	
Voltage Max.	125 / 250 VAC
Current Max.	10 A
Power Max.	373 W
Electrical Configuration	SPDT
Bulb	
Input Voltage	28 VDC (14 VDC, optional)
Current	16 mA \pm 10%, 12 V

PRODUCT SERIES

10ACPBSS1	Single-gang push button, illuminated, "Push To Exit"
------------------	------------------------------------------------------

CABINET LOCK

80 LB ELECTROMAGNETIC LOCK



TECHNICAL SPECIFICATIONS

Door Configuration	Single / Cabinet, surface mount
Holding Force	80 lbs
Input Voltage	12 or 24 VDC
Current Draw	100 mA at 12 VDC 50 mA at 24 VDC
Dimensions	2 3/4" (W) x 1 1/50" (H) x 7/10" (D)
Magnet Weight	0.44 lbs
Materials	
Lock Housing	Aluminum
Armature Plate	Zinc-plated steel

PRODUCT SERIES

10MAGLIFELOCK9	Cabinet lock - single, 80 lb, 12 / 24 VDC
-----------------------	-------------------------------------------



DELAYED-EGRESS MAGLOCK KIT

UL LISTED, ALL-IN-ONE KIT WITH MAGLOCK, SOUNDER, AND KEYSWITCH



Door-Synchronizing Feature

Double doors (2 single doors) can be synchronized

Programmable Egress Time

Authorized egress time programmable zero to 15 seconds

Selectable Alarm

Selectable, 30-second, door prop alarm

Customizable LED Features

LED color and flashes can be customized

TECHNICAL SPECIFICATIONS

Housing Dimensions	10 53/64" (W) x 2 7/8" (H) x 2 1/8" (D)
Armature Dimensions	7 7/16" (W) x 2 3/8" (H) x 5/8" (D)
Voltage / Tolerance	12 – 24 VDC; ±10%
Max. Power / Current Draw	
Maglock and Sounder	0.49 A / 12 VDC 0.24 A / 24 VDC
Low Voltage Supply	
Detection / Alarm	< 8 V
Holding Force	Up to 1200 lb
Mortise Cylinder	1 1/8" cylinder with straight cam required, NOT INCLUDED
	<i>Requires 10CYLINDERKA or 10CYLINDERKD</i>
Operating Temperature	14 – 140 °F
Norm Conformity	UL / CUR Listed FWAX Special locking arrangements
Compliance Provisions	IBC, SBC, UBC, BOCA, or NBC of Canada, NFPA 101

Input Features

Monitored, fire-alarm input

Triggering Options

Delayed-Egress MAGLOCK can be triggered with pressure on the door or with a REX input (or disabled completely)

Standards Compliant

UL294 listed kit

PRODUCT SERIES

10MAGDE1	All-in-one Delayed Egress MAGLOCK Kit for single, out-swinging doors UL / ULC listed, LED status, 12 / 24 VDC Kit includes: (1) 1200 lb MAGLOCK (1) resettable KEYSWITCH (mortise cylinder not included) (1) external sounder (1) alarm signage UL Listed MAGLOCKS require a UL Listed power supply
10CYLINDERKA	1 1/8" mortise cylinder, Schlage C Keyway, keyed alike
10CYLINDERKD	1 1/8" mortise cylinder, Schlage C Keyway, keyed differently
10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) <i>battery NOT included</i>
50.0336	Signage for 10MAGDE1 "Push until alarm sounds door can be opened within 15 seconds"



ELECTRIC STRIKES

UL LISTED ELECTRIC STRIKES FOR US AND CANADA

Modular Faceplate Options


Three modular faceplates for the most common door types: hollow metal, aluminum, and wood

Standards Compliant

UL294 and UL1034 listed Universal Cylindrical and Rim Exit strikes

Configurable

The non-handed, fully reversible design is field selectable to 12 or 24 VDC and field reversible with a fail-safe or fail-secure mode

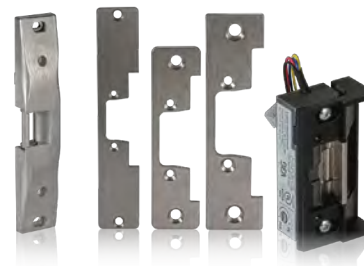

Durable

UL tested to 250,000 cycles, factory-tested to 1,000,000 cycles

UL Listed

Universal Cylindrical strikes are rated to 1000 lbs static and 70 lbs dynamic (50 lbs dynamic for CUV model)

Rim Exit strikes are rated to 1500 lbs static and 70 dynamic

TECHNICAL SPECIFICATIONS

10STRIKERE

Mode*	Fail-safe		
Voltage	12 VAC/VDC	24 VAC/VDC	11 – 16 VAC
Duty**	Intermittent, Continuous	Intermittent, Continuous	Intermittent, Intermittent
Amps***	0.30, 0.50	0.64, 0.24	0.32 – 0.50
Sound	Buzz, silent	Buzz, silent	Buzz, buzz
Static / Dynamic Strength	1500 lbs / 70 lbs		
Endurance	250,000 cycles (UL tested)		
Latch Throw	3/4"		
Standards Compliance	UL294, UL1034, UL and ULC listed		

10STRIKECU

Mode*	Fail-safe, Fail-secure		
Voltage	12 VDC	24 VDC	12 – 24 VAC
Duty**	Continuous	Continuous	Intermittent
Amps***	0.375	0.190	0.280 – 0.565
Sound	Silent	Silent	Buzz
Static / Dynamic Strength	1000 lbs / 70 lbs		
Endurance	250,000 cycles (UL tested)		
Latch Throw	1/2" or 3/8"		
Standards Compliance	UL294, UL1034, UL and ULC listed		

* Fail Safe – Lock or locking device that remains unlocked on loss of power
Fail Secure – Lock or locking device that remains locked on loss of power (also known as Non-Fail Safe (NFS))

** Intermittent Duty – Energized less than 1 minute with duty ratio 1:5
Continuous Duty – Energized 1 minute or more

*** Amp ratings are based on maximum current draw at 50 °F and include initial power-up current

PRODUCT SERIES

10STRIKECU	UL / ULC Listed, universal cylindrical, electric strike with three faceplates for aluminum, hollow metal, and wood frame installations
10STRIKERE	UL / ULC Listed, surface-mounted, electric strike for rim exit device



ELECTRIC STRIKES

UL LISTED ELECTRIC STRIKES FOR THE US MARKET

Modular Faceplate Options

Three modular faceplates for the most common door types: hollow metal, aluminum, and wood

Standards Compliant

UL294 and UL1034 listed Universal Cylindrical and Rim Exit strikes

Configurable

The non-handed, fully reversible design is field selectable to 12 or 24 VDC and field reversible with a fail-safe or fail-secure mode




Durable

UL tested to 250,000 cycles, factory-tested to 1,000,000 cycles

UL Listed

Universal Cylindrical strikes are rated to 1000 lbs static and 70 lbs dynamic (50 lbs dynamic for CUV model)

Rim Exit strikes are rated to 1500 lbs static and 70 dynamic



TECHNICAL SPECIFICATIONS

10STRIKEREREV12 / 10STRIKEREV34

Mode*	Fail-safe, Fail-secure	
Voltage	12 VDC	24 VDC
Duty**	Continuous	Continuous
Amps ***	0.540	0.270
Sound	Silent	Silent
Static / Dynamic Strength	1500 lbs / 70 lbs	
Endurance	250,000 cycles (UL tested) / 1,000,000 cycles (factory tested)	
Latch Throw	½" or ¾"	
Standards Compliance	UL294, UL1034, UL Listed	

10STRIKECUV

Mode*	Fail-safe, Fail-secure	
Voltage	12 VDC	24 VDC
Duty**	Continuous	Continuous
Amps ***	0.300	0.150
Sound	Silent	Silent
Static / Dynamic Strength	1000 lbs / 70 lbs	
Endurance	250,000 cycles (UL tested) / 1,000,000 cycles (factory tested)	
Latch Throw	⅞" (15 mm max)	
Standards Compliance	UL294, UL1034, UL Listed	

PRODUCT SERIES

10STRIKECUV	UL Listed, universal cylindrical, electric strike
10STRIKEREV12	UL Listed, rim exit electric strike (½")
10STRIKEREV34	UL Listed, rim exit electric strike (¾")

* Fail Safe – Lock or locking device that remains unlocked on loss of power
 Fail Secure – Lock or locking device that remains locked on loss of power (also known as Non-Fail Safe (NFS))
 ** Intermittent Duty – Energized less than 1 minute with duty ratio 1:5
 Continuous Duty – Energized 1 minute or more
 *** Amp ratings are based on maximum current draw at 50 °F and include initial power-up current

KEYSWITCHES


ACCESS-CONTROL SWITCH PLATE

Vandal Resistant

Aluminum, wall plate with tamper-resistant screws

Multiple Plate Sizes

Available in jamb and single-gang wall plates or double-gang combo-plate

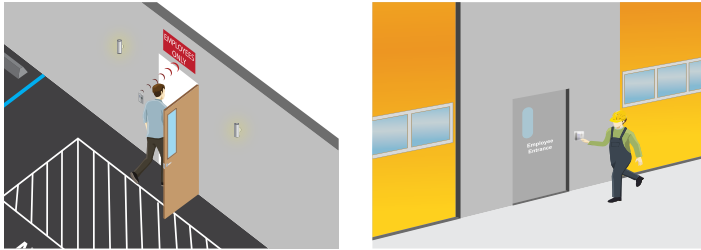

TECHNICAL SPECIFICATIONS

Technology	Mechanical key access
Faceplate Dimensions	
Jamb	1 3/4" (W) x 4 3/4" (H) x 1/4" (D)
Single	2 1/2" (W) x 4 3/4" (H) x 1/4" (D)
Combo-plate	4 1/2" (W) x 4 1/2" (H) x 1/4" (D)
Visual Style (combo plate only)	Accessibility symbol and "Push To Open" text
Material	Aluminum
Switch Rating	6 A at 125 VAC or 3 A at 250 VAC
Mortise Cylinder*	1 1/8" cylinder with straight cam required

* NOT INCLUDED – Requires part 10CYLINDERKA or 10CYLINDERKD



Keyswitch Override

Combo plate allows for independent operation of the push plate and keyswitch, or allows the keyswitch to activate or disable the push plate

Selectable Power Consumption

Capable of switching 6A at 124 VAC or 3A at 250 VAC



PRODUCT SERIES

10KEYSWITCHONF	Maintained keyswitch - single gang 3" x 4 3/4" x 1/2" <i>Mortise cylinder not included</i>
10KEYSWITCHMOM	Momentary keyswitch - single gang 3" x 4 3/4" x 1/2" <i>Mortise cylinder not included</i>
10JAMBSWITCHONF	Maintained keyswitch - jamb 1 3/4" x 4 3/4" x 1/2" <i>Mortise cylinder not included</i>
10JAMBSWITCHMOM	Momentary keyswitch - jamb 1 3/4" x 4 3/4" x 1/2" <i>Mortise cylinder not included</i>
10COMBOPLATE	Jamb push plate combined with maintained keyswitch on a double-gang faceplate <i>Mortise cylinder not included</i>
10COMBOPLATEMOM	Jamb push plate combined with momentary keyswitch on a double-gang faceplate <i>Mortise cylinder not included</i>
10CYLINDERKA	1 1/8" mortise cylinder, Schlage C Keyway, keyed alike
10CYLINDERKD	1 1/8" mortise cylinder, Schlage C Keyway, keyed differently
20.2021	ON / OFF switch for 10KEYSWITCHONF and 10JAMBSWITCHONF
20.2020	Momentary switch for 10KEYSWITCHMOM and 10JAMBSWITCHMOM

MOUNTING OPTIONS

10BOX24SGSM	Standard single-gang, surface-mount box (2 3/4" x 4 1/2")
10BOXDGSM	Surface-mount box, double gang



PIEZO BUTTON

HEAVY DUTY, PIEZOELECTRIC PUSH BUTTON

Adjustable Hold Time


1 to 40 seconds, user-adjustable output hold time

Selectable Modes

Can be configured to fail-safe or fail-secure

NO or NC

Can be wired normally open or normally closed

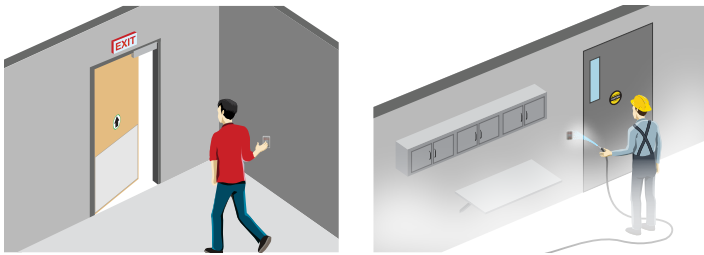

Customizable Illumination

LED illumination can be customized to user preference

Vandal Resistant

Vandal- and tamper-resistant design

TECHNICAL SPECIFICATIONS

Technology	Piezoelectric
Faceplate Dimensions	
Single Gang	2 ¾" (W) × 4 ½" (H)
LED	Illuminated red/green ring that signals activation (can also be disabled)
Faceplate Material	Stainless steel
Hold Time Range	1 – 40 s (adjustable)
Voltage Input	12 – 24 VDC (auto-sensing)
Norm Conformity	IP65

PRODUCT SERIES

10PIEZO241	Piezoelectric push button, single gang "Push To Exit" text
10BOX24SGSM	Standard, single-gang, surface-mount box (2 ¾" × 4 ½")



PNEUMATIC PUSH BUTTONS

ACCESS CONTROL PUSH BUTTON WITH MECHANICAL-PNEUMATIC HOLDTIME

Customizable

Adjustable time delay of 2 to 60 seconds

Standards Compliant

Listed UL508 / CSA C22.2 No 14-10 with MET LABS, File #E113051

Various Styles

Buttons available in 1 5/8 inch (standard) or 2 inch (large) sizes




Meet Your Application Needs

Available in a variety of combinations of color, text, and logo (upon request)

Tested to Last

Tested to perform greater than 1 million operations



TECHNICAL SPECIFICATIONS

Technology	Pneumatic
Faceplate Dimensions	
Single	2 3/4" (W) x 4 1/2" (H)
Jamb	1 3/4" (W) x 4 1/2" (H)
Visual Style	Red button with "Push to Exit" text Blue button with accessibility logo Green button with "Push to Exit" text
Materials	
Faceplate	Stainless steel
Button	Colored, anodized aluminum
Switch Rating	5 A at 125 VAC
Time Range	2 – 60 s ±15%, adjustable
Repeat Accuracy	±5% at 72 °F
Operating Temperature	-15 – 120 °F <i>Rated for indoor use only</i>
Timer Life	1,000,000 operations

PRODUCT SERIES

10ACPBD A1	2" jamb, red button, text only
10ACPBD A2	2" single-gang, red button, text only
10ACPBD A3	1 5/8" jamb, red button, text only
10ACPBD A4	1 5/8" single-gang, red button, text only
10ACPBD A5	2" jamb, blue button, logo only
10ACPBD A6	2" single-gang, blue button, logo only
10ACPBD A7	1 5/8" jamb, blue button, logo only
10ACPBD A8	1 5/8" single-gang, blue button, logo only
10ACPBD A9	2" jamb, green button, text only
10ACPBD A10	2" single-gang, green button, text only
10ACPBD A11	1 5/8" jamb, green button, text only
10ACPBD A12	1 5/8" single-gang, green button, text only

MOUNTING OPTIONS

10BOXJAMBST	Surface-mount, jamb box - hardwired only (1 3/4" x 4 1/2" jamb)
10BOX24SGSM	Standard single-gang, surface-mount box (2 3/4" x 4 1/2")



UL LISTED GATELOCKS

WEATHER-RESISTANT, ELECTROMAGNETIC LOCK

Multiple Mounting Options


Available in front or side mount with a 1200 lb holding force

Easy-to-Mount

Front-mount model comes with a 3/4 inch male NPS threaded conduit fitting

Lock Status Sensor

Built-in remote lock status sensor with an output relay

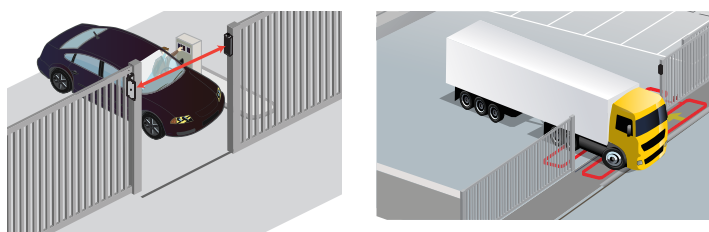

TECHNICAL SPECIFICATIONS

10GL1200R	
Door Configuration	Sliding gate, front mount
Holding Force	1200 lb
Input Voltage	12 / 24 VDC (UL Listed power supply recommended)
Current Draw	500 mA at 12 VDC 250 mA at 24 VDC
Relay Switch	250 mA at 12 VDC 125 mA at 24 VDC
Dimensions	8 3/4" (W) x 2 1/2" (H) x 1 5/8" (D)
Material	Stainless steel
Sensor	Lock status sensor with relay output
Cable Specifications	24 AWG, 7-conductor cable, 3 1/2'
Norm Conformity	UL and ULC ANSI 156.10 NEMA 4 / IP65
Conduit Fitting (10GL1200R ONLY)	3/4" NPS conduit fitting 14 threads per inch
10GL1200SR	
Door Configuration	Sliding door / gate, side mount
Holding Force	1200 lb
Input Voltage	12 / 24 VDC (UL Listed power supply recommended)
Current Draw	500 mA at 12 VDC 250 mA at 24 VDC
Relay Switch	250 mA at 12 VDC 125 mA at 24 VDC
Dimensions	8 3/4" (W) x 2 1/2" (H) x 1 5/8" (D)
Material	Stainless steel
Sensor	Lock status sensor with relay output
Cable Specifications	24 AWG, 7-conductor cable, 3 1/2'
Norm Conformity	UL and ULC ANSI 156.10 NEMA 4 / IP65



Additional Protection

Built-in surge protection

Withstands the Elements

Weather-resistant, stainless steel housing makes these locks suitable for outdoor applications

PRODUCT SERIES

10GL1200R	UL / ULC Listed, 12 / 24 VDC, front-mounted, 1200 lb
10GL1200SR	UL / ULC Listed, 12 / 24 VDC, side-mounted, 1200 lb
10LZBRGATE1200	(1) "L" bracket (1) "Z" bracket
10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) <i>battery NOT included</i>



SUPPORT & SERVICES

WEBSITE

Our website sources a multitude of product material, technology breakdowns, contact and general info.

us.BEAensors.com/en/



BEA TOOLS

Tools at your fingertips. BEA has developed a collection of product-specific mobile apps and online tools to assist you before and during the installation process.

us.BEAensors.com/en/BEA-tools/



CONTINUED EDUCATION

BEA is a member of the American Association of Automatic Door Manufacturers (AAADM) and is listed as a certified trainer by AAADM. Additionally, our Sensor Integration School offers a comprehensive program designed to educate technicians on the integration of sensors and devices with automatic doors. BEA's highly trained staff are capable of providing the most effective and complete service possible.

us.BEAensors.com/en/trainings/



WEBINARS

BEA offers weekly online webinars on specific BEA products. Sign up to participate in a scheduled training or contact us to schedule a private webinar for your team.

us.BEAensors.com/en/training/product-webinars/



DOWNLOADS

Need the latest cut sheet or marketing brochure? With our downloads area, you have the ability to access all relevant material in one place.

us.BEAensors.com/en/downloads-area/



EVENTS

Visit BEA onsite where we will be displaying our services and solutions!

us.BEAensors.com/en/news/BEA-events/



YOUTUBE

At BEA Americas, our team is inspired and empowered to provide advanced sensor solutions which help to grow a safe and convenient automated world. We have taken an innovative approach to enhance customer support and engagement by creating a dedicated YouTube channel. Our videos provide customers and technicians with comprehensive guidance on our diverse range of products and solutions. From product showcases to technical troubleshooting, customers can conveniently access valuable information at their fingertips.

YouTube.com/user/BEAensors/





1200LB MAGLOCKS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY AND LOCK (BOND) STATUS SENSOR

User-Configurable


Adjustable zero to 90 second relock time delay

Enhanced Access Control / Monitoring

Lock (bond) status sensor with visible LED offers either normally open or normally closed output configurations

UL 294 Listed*

Listed for access control systems and must be used with a UL Listed power supply

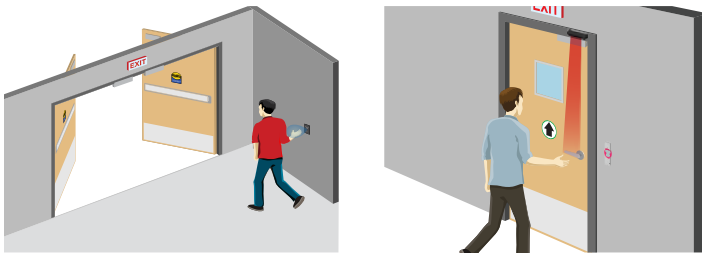

TECHNICAL SPECIFICATIONS

10MAGLOCK1UL

Lock	Single
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Relay Power Factor	1
Reed Switch Rating	Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load)
Reed Switch Power Factor	1
Power Consumption	500 mA at 12 VDC 250 mA at 24 VDC
Dimensions	10 15/32" (W) x 2 7/8" (H) x 1 37/64" (D)
Certification	UL294 (up to 1,000 lb static strength) File #BP10577
Operating Temperature	32 – 120 °F
Operating Humidity	0 – 85%

10MAGLOCK5UL

Lock	Double
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Relay Power Factor	1
Reed Switch Rating	Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load)
Reed Switch Power Factor	1
Power Consumption	500 mA at 12 VDC 250 mA at 24 VDC each
Dimensions	21" (W) x 2 7/8" (H) x 1 37/64" (D)
Certification	UL294 (up to 1,000 lb static strength) File #BP10577
Operating Temperature	32 – 120 °F
Operating Humidity	0 – 85%



Anti-Tampering

The security screw on the front face blocks access to the bottom of the electromagnetic lock preventing tampering or dismounting

Convenient Packages Available

Available in access control packages with sensor, logic module, actuator, and MAGLOCK

* This product is UL294-listed up to 1,000 lb static strength.

PRODUCT SERIES

10MAGLOCK1UL	1,200 lb holding force / Single UL Listed 294 @ 1,000 lb static force
10MAGLOCK5UL	1,200 lb holding force / Double UL Listed 294 @ 1,000 lb static force
MAG5LZUL	(2) "L" brackets, (2) "Z" brackets - <i>for single 1200 lb MAGLOCKS</i>
10UBRACKETUL	Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick
10FILLER12UL	1/2" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER14UL	1/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER34UL	3/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER58UL	5/8" x 3/4" horizontal filler plate used to fill or extend door stops - <i>for single locks only</i>
10RIMHOUSING1UL	Provides a more aesthetically pleasing look over standard armature plates - <i>for single 1200 lb MAGLOCKS</i>
10SPACER1UL	Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 1200 lb MAGLOCKS</i>
10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>
50.0334	Screw pack for 10MAGLOCK1UL

See page 95 for Access Control packages.



1200LB MAGLOCKS WITH DS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY, LOCK (BOND) STATUS SENSOR, AND DOOR STATUS SENSOR

User-Configurable


Adjustable zero to 90 second relock time delay

Enhanced Access Control / Monitoring

Lock (bond) status sensor with visible LED offers either normally open or normally closed output configurations

UL 294 Listed*

Listed for access control systems and must be used with a UL Listed power supply

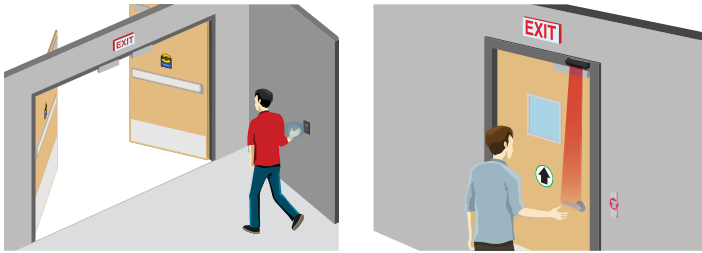

TECHNICAL SPECIFICATIONS

10MAGLOCK1ULDS	
Lock	Single
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Relay Power Factor	1
Reed Switch Rating	Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load)
Reed Switch Power Factor	1
Power Consumption	500 mA at 12 VDC 250 mA at 24 VDC
Dimensions	10 1 ⁵ / ₃₂ " (W) × 2 7 ¹ / ₈ " (H) × 1 37 ³ / ₆₄ " (D)
Certification	UL294 (up to 1,000 lb static strength) File #BP10577
Operating Temperature	32 – 120 °F
Operating Humidity	0 – 85%
10MAGLOCK5ULDS	
Lock	Double
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Relay Power Factor	1
Reed Switch Rating	Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load)
Reed Switch Power Factor	1
Power Consumption	500 mA at 12 VDC 250 mA at 24 VDC each
Dimensions	21" (W) × 2 7 ¹ / ₈ " (H) × 1 37 ³ / ₆₄ " (D)
Certification	UL294 (up to 1,000 lb static strength) File #BP10577
Operating Temperature	32 – 120 °F
Operating Humidity	0 – 85%



Anti-Tampering

The security screw on the front face blocks access to the bottom of the electromagnetic lock preventing tampering or dismounting

Convenient Packages Available

Available in access control packages with sensor, logic module, actuator, and MAGLOCK

* This product is UL294-listed up to 1,000 lb static strength.

PRODUCT SERIES

10MAGLOCK1ULDS	1,200 lb holding force / Single UL Listed 294 @ 1,000 lb static force
10MAGLOCK5ULDS	1,200 lb holding force / Double UL Listed 294 @ 1,000 lb static force
MAG5LZUL	(2) "L" brackets, (2) "Z" brackets - <i>for single 1200 lb MAGLOCKS</i>
10UBRACKETUL	Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick
10FILLER12UL	1/2" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER14UL	3/4" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER34UL	3/4" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER58UL	5/8" × 3/4" horizontal filler plate used to fill or extend door stops
10RIMHOUSING1UL	Provides a more aesthetically pleasing look over standard armature plates - <i>for single 1200 lb MAGLOCKS</i>
10SPACER1UL	Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 1200 lb MAGLOCKS</i>
10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>
50.0340	Cover plate ONLY with DS switch for 10MAGLOCK1ULDS
50.0342	Cover plate ONLY with DS switch for 10MAGLOCK5ULDS
50.0334	Screw pack for 10MAGLOCK1UL

See page 95 for Access Control packages.



600LB MAGLOCKS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY AND LOCK (BOND) STATUS SENSOR

Customizable


Adjustable zero to 90 second relock time delay

Enhanced Reliability

Lock status sensor with visible LED offers either normally open or normally closed output configurations

UL Listed

Input voltage of 12 / 24 VDC, must be used with UL Listed power supply

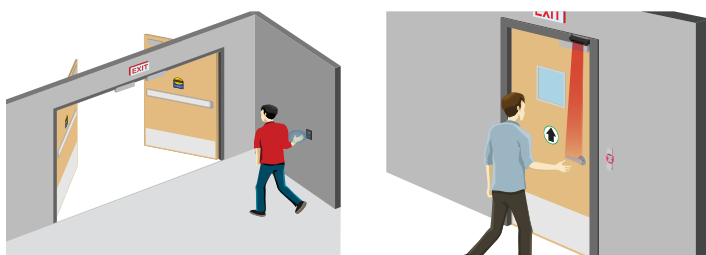

Mounting Accessories

Variety of mounting hardware available

Convenient Packages Available

Available in access control packages with request-to-exit sensor, logic module, actuator, power supply, and MAGLOCK

TECHNICAL SPECIFICATIONS

10MAGLOCK3UL	
Lock	Single
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Reed Switch Rating	SPDT 0.5 amp at 30 VAC / VDC resistive
Power Consumption	505 mA × 2 at 12 VDC 260 mA × 2 at 24 VDC
Dimensions	9 27/32" (W) × 1 21/32" (H) × 1" (D)
Certification	UL1034
Operating Temperature	14 – 131 °F
Operating Humidity	0 – 95%
10MAGLOCK6UL	
Lock	Double
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Reed Switch Rating	SPDT 0.5 amp at 30 VAC / VDC resistive
Power Consumption	505 mA × 2 at 12 VDC 260 mA × 2 at 24 VDC
Dimensions	19 3/4" (W) × 1 21/32" (H) × 1" (D)
Certification	UL1034
Operating Temperature	14 – 131 °F
Operating Humidity	0 – 95%

PRODUCT SERIES

10MAGLOCK3UL	600 lb holding force / Single UL Listed 294 @ 500 lb static force
10MAGLOCK6UL	600 lb holding force / Double UL Listed 294 @ 500 lb static force
MAG6LZUL	(2) "L" brackets, (2) "Z" brackets - <i>for single 600 lb MAGLOCKS</i>
10UBRACKETUL	Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick
10FILLER12UL	1/2" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER14UL	1/4" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER34UL	3/4" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER58UL	5/8" × 3/4" horizontal filler plate used to fill or extend door stops - <i>for single locks only</i>
10RIMHOUSING3UL	Provides a more aesthetically pleasing look over standard armature plates - <i>for single 600 lb MAGLOCKS</i>
10SPACER3UL	Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 600 lb MAGLOCKS</i>
10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>
50.0335	Screw pack for 10MAGLOCK3UL

See page 95 for Access Control packages.



600LB MAGLOCKS WITH DS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY, LOCK STATUS SENSOR, AND DOOR STATUS SENSOR

Customizable


Adjustable zero to 90 second relock time delay

Enhanced Reliability

Lock status sensor with visible LED offers either normally open or normally closed output configurations

UL Listed

Input voltage of 12 / 24 VDC, must be used with UL Listed power supply

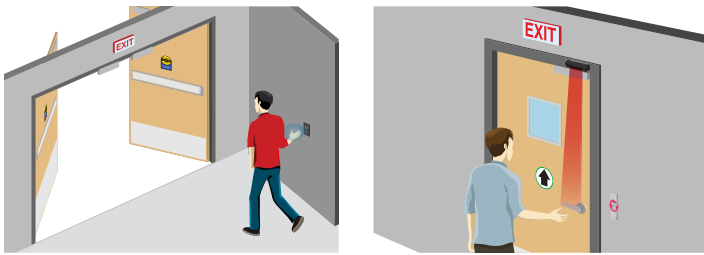

TECHNICAL SPECIFICATIONS

10MAGLOCK3ULDS

Lock	Single
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Relay Power Factor	1
Reed Switch Rating	Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load)
Reed Switch Power Factor	1
Power Consumption	500 mA at 12 VDC 250 mA at 24 VDC
Dimensions	10 1/2" (W) x 2 7/8" (H) x 1 1/2" (D)
Certification	UL1034
Operating Temperature	14 – 131 °F
Operating Humidity	0 – 95%

10MAGLOCK6ULDS

Lock	Double
Input Voltage	12 or 24 VDC
Relay Rating	1.0 A at 24 VDC resistive
Relay Power Factor	1
Reed Switch Rating	Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load)
Reed Switch Power Factor	1
Power Consumption	505 mA x 2 at 12 VDC 260 mA x 2 at 24 VDC
Dimensions	21" (W) x 2 7/8" (H) x 1 1/2" (D)
Certification	UL1034
Operating Temperature	14 – 131 °F
Operating Humidity	0 – 95%



Mounting Accessories

Variety of mounting hardware available

Convenient Packages Available

Available in access control packages with sensor, logic module, actuator, and MAGLOCK

PRODUCT SERIES

10MAGLOCK3ULDS	600 lb holding force / Single UL Listed 294 @ 500 lb static force
10MAGLOCK6ULDS	600 lb holding force / Double UL Listed 294 @ 500 lb static force
MAG6LZUL	(2) "L" brackets, (2) "Z" brackets - <i>for single 600 lb MAGLOCKS</i>
10UBRACKETUL	Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick
10FILLER12UL	1/2" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER14UL	1/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER34UL	3/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>
10FILLER58UL	5/8" x 3/4" horizontal filler plate used to fill or extend door stops
10RIMHOUSING3UL	Provides a more aesthetically pleasing look over standard armature plates - <i>for single 600 lb MAGLOCKS</i>
10SPACER3UL	Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 600 lb MAGLOCKS</i>
10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>
50.0341	Cover plate ONLY with DS switch for 10MAGLOCK3ULDS
50.0343	Cover plate ONLY with DS switch for 10MAGLOCK6ULDS
50.0335	Screw pack for 10MAGLOCK3UL

See page 95 for Access Control packages.



UNIVERSAL KEYPAD FAMILY

ACCESS-CONTROL KEYPADS FOR INDOOR AND OUTDOOR USE



Highly Flexible

Allows for up to 1100 user codes

Ideal for Outdoor Environments

IP66 rating ensures the device will withstand the elements in harsh industrial and outdoor environments

Tamper Alarm

Incorporates a tamper alarm feature as a standard option

Multiple Relays

Two-zone feature provides 2 relays and 2 exit button outputs for two-zone applications

Improved Visibility

Back-lit numbers allow for ease of use in dimly lit areas



TECHNICAL SPECIFICATIONS

Supply Voltage	12 – 24 VAC/VDC <i>DO NOT EXCEED 30 VDC or 24 VAC</i>
Standby Current	≤ 30 mA
Working Current	≤ 160 mA
Max User Codes	1100
Zone 1	1000 users
Zone 2	100 users
Relock Time	0 – 99 s
Output	2 relays (free of potential change-over contact)
Max. Contact Voltage	42 VAC/VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (VDC) / 48 VA (VAC)
Cable Length	3'
Operating Temperature	-22 – 158 °F
Operating Humidity	0 – 95% (non-condensing)
IP Rating	IP66 (waterproof and dust proof)
Dimensions	
Single gang	3" (W) × 4 7/10" (H) × 9/10" (D)
Slim-line	1 7/10" (W) × 5 9/10" (H) × 19/20" (D)
Certifications	CE, RoHS
Backlight	Blue keypad illumination

PRODUCT SERIES

10KEYPADU	Universal keypad for indoor and outdoor use
10KEYPADUSL	Universal, slimline keypad for indoor and outdoor use



LED SIGNAL COLUMN LIGHTS

UL LISTED, SINGLE-COLOR LIGHT



Standards Compliant

UL Listed

Ideal For Harsh Environments



IP67 rating for maximum performance in harsh environments

Three Highly Visible Colors

Available LED colors include red, green, and yellow

Selectable Voltage

18 to 30 VDC supply voltage

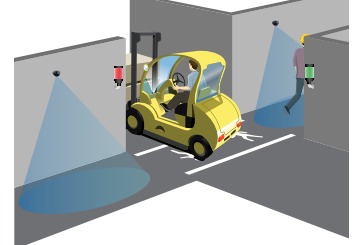

TECHNICAL SPECIFICATIONS

Supply Voltage	18 – 30 VDC
Indicator Response Time	
Off Response	10 ms
On Response	10 ms
LED	Red, green, yellow
Connector	78" 4-wire integral cable
Operating Temperature	-40 – 122 °F 95% at 122 °F maximum relative humidity (non-condensing)
Degree of Protection	IP67
Norm Conformity	CE, UL1598 listed, UL8750 listed

PRODUCT SERIES

10LIGHTC-G	Green LED column light for signaling applications
10LIGHTC-Y	Yellow LED column light for signaling applications
10LIGHTC-R	Red LED column light for signaling applications
10LIGHTC-YA	Yellow LED column light with audible signal for signaling applications
10LIGHTC-RA	Red LED column light with audible signal for signaling applications
10LIGHTBRACKET	LED SIGNAL LIGHT bracket
10PS12-24	UL / ULC Listed power supply



LED SIGNAL MODULAR LIGHTS

UL LISTED, BUILD-YOUR-OWN LIGHTS AND AUDIBLE ALARM





Highly Durable Indicators

UL Listed and IP65 rated to meet the needs of any application

Adjustable Settings

Light units can be programmed to pulse at a rate of 1 ½ or 3 times per second or remain steady

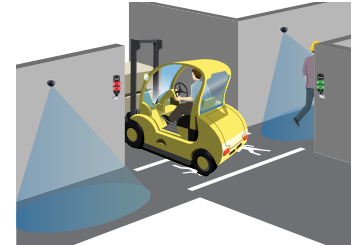

Optional Alerts

Optional, audible alarm unit offers secondary alert method with chirp, siren, continuous, and 1 ½ beeps-per-second configuration settings

Flexible Indication Solution

Base unit and bracket are designed for a variety of installation

TECHNICAL SPECIFICATIONS

Supply Voltage	12 – 30 VDC
Indicator Response Time	
Off Response	150 µs at 12 – 30 VDC
On Response	180 mSec at 12 VDC; 50 mSec at 30 VDC
LED	Red, green, yellow
Light Flash Rates	1.5 Hz ±10% 3 Hz ±10%
Audible Alarm	2.6 KHz ±250 Hz oscillation frequency; maximum intensity 92 dB at 39.6 in
Audible Adjustment	Rotate the alarm cover; Open to closed is 8 db
Connector	78" 8-wire integral cable
Operating Temperature	-40 – 122 °F 95% at 122 °F maximum relative humidity (non-condensing)
Degree Of Protection	NEMA 4 / IP65
Norm Conformity	CE, UL1598 Listed and UL8750 Listed
Dimensions	
Base	2 ¾" Ø × 1 ⅜" (H)
Light Segment	2 ¾" Ø × 2 ⅜" (H)
Audible Segment	2 ¾" Ø × 2 ¾" (H)

PRODUCT SERIES

10LIGHT-TBASE	LED Modular Signal Light, LED signal base
10LIGHT-TR	LED Modular Signal Light - single color unit (red)
10LIGHT-TG	LED Modular Signal Light - single color unit (green)
10LIGHT-TW	LED Modular Signal Light - single color unit (white)
10LIGHT-TY	LED Modular Signal Light - single color unit (yellow)
10LIGHT-A	Modular, LED signal, audible segment
10LIGHTBRACKET	LED Signal Light bracket
10LIGHTBRACKET-TL70	LED Signal Light bracket - 30mm, 12 gauge SS, curved mounting
10PS12-24	UL / ULC Listed power supply



LED SIGNAL TRAFFIC LIGHTS


RUGGED, COST-EFFECTIVE SIGNALS FOR WARNING INDICATION SYSTEMS

Standards Compliant

Single-light model rated IP67; double-light model rated IP65

Highly Visible

Intense levels of light output for outdoor applications



Customizable

Controlled field of view for signage and narrow-lane use

Dual-Indicator Modes

One- and two-indicator models available

TECHNICAL SPECIFICATIONS

Supply Voltage	15 – 30 VDC
Indicators	
Off Response	10 ms max.
On Response	10 ms max.
LED	
One Indicator	Red or green
Two Indicator	Red and green
Connections	Field wired
Operating Temperature	-40 – 122 °F
Material	PC
Degree of Protection	
Single	IP67
Double	IP65
Norm Conformity	CE

PRODUCT SERIES

10LIGHTS-G	Traffic, green LED signal light
10LIGHTS-R	Traffic, red LED signal light
10LIGHTD-RG	Traffic, red/green LED signal light
10PS12-24	UL / ULC Listed power supply

ACCESS CONTROL PACKAGES


SINGLE-DOOR APPLICATION PACKAGES

Easy Ordering

Packages for request-to-exit applications

Customizable

Package includes your choice of request-to-exit sensors, 600 or 1200 lb MAGLOCK, coupled with door logic and power

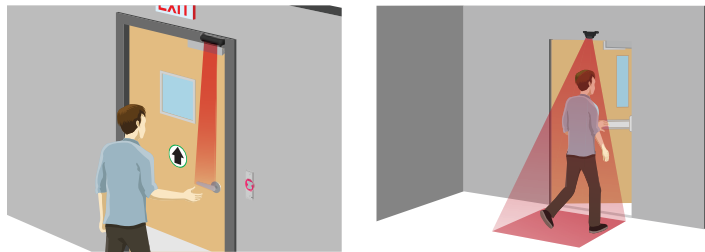

PRODUCT SERIES

- 10ACP12** Single Door Package 1 utilizes our R2E-100 with focused active infrared presence detection pattern for secure request-to-exit and a 1200 lb MAGLOCK
- (1) 10PS12-24 - UL power supply, filtered and regulated
 - (1) 10MAGLOCK1UL - 1200 lb MAGLOCK (pg 74)
 - (1) 10R2E100 - Request-to-Exit sensor (pg 34)
 - (1) 10ACPBSS1 - "Push-to-Exit" button (pg 76)
 - (1) 10BR3X - programmable, 3-relay, logic module (pg 52)
- 10ACP12F** Single Door Package 2 utilizes our FLY with adjustable, passive infrared presence detection pattern for secure request-to-exit and a 1200 lb MAGLOCK
- (1) 10PS12-24 - UL power supply, filtered and regulated
 - (1) 10MAGLOCK1UL - 1200 lb MAGLOCK (pg 74)
 - (1) 10FLYKITB - Request-to-Exit sensor (pg 18)
 - (1) 10ACPBSS1 - "Push-to-Exit" button (pg 76)
 - (1) 10BR3X - programmable, 3-relay, logic module (pg 52)



Easy Installation

Wiring diagram included

- 10ACP6** Single Door Package 3 utilizes our R2E-100 with focused active infrared presence detection pattern for secure request-to-exit and a 600 lb MAGLOCK
- (1) 10PS12-24 - UL power supply, filtered and regulated
 - (1) 10MAGLOCK3UL - 600 lb MAGLOCK (pg 89)
 - (1) 10R2E100 - Request-to-Exit sensor (pg 34)
 - (1) 10ACPBSS1 - "Push-to-Exit" button (pg 76)
 - (1) 10BR3X - programmable, 3-relay, logic module (pg 52)
- 10ACP6F** Single Door Package 4 utilizes our FLY with adjustable, passive infrared presence detection pattern for secure request-to-exit and a 600 lb MAGLOCK
- (1) 10PS12-24 - UL power supply, filtered and regulated
 - (1) 10MAGLOCK3UL - 600 lb MAGLOCK (pg 89)
 - (1) 10FLYKITB - Request-to-Exit sensor (pg 18)
 - (1) 10ACPBSS1 - "Push-to-Exit" button (pg 76)
 - (1) 10BR3X - programmable, 3-relay, logic module (pg 52)



LOW-ENERGY PACKAGES

ALL-IN-ONE, REACTIVATION PACKAGES FOR LOW-ENERGY DOORS



Easy Ordering

Convenient solution that includes secondary reactivation and enhanced door logic

Logic Control

LE21 or BR3-X logic disables SUPERSCAN-T until the door is activated by a knowing act device

Door Monitoring

Door position switch monitors state of door to enable / disable sensors



PRODUCT SERIES

-
- LE PACKAGE 6** (1) 10SSTII (length) - SUPERSCAN-T II door-mounted, safety sensor (pg 35 – 37)
 (1) primary, (1) secondary
 34 1/2" end cap to end cap (for 36" doors)
- (1) 10BR3X programmable, 3-relay, logic module (pg 52)
- (1) 10SWITCH75 magnetic, door position switch
 1/2" gap, NO / NC, SPDT
 7/16" diameter, flush mount
-

- LE PACKAGE 6 SECURITY** (1) 10SSTII (length) - SUPERSCAN-T II door-mounted, safety sensor (pg 35 – 37)
 (1) primary, (1) secondary
 34 1/2" end cap to end cap (for 36" doors)
- (1) 10BR3X programmable, 3-relay, logic module (pg 52)
- (1) 10SWITCH75 magnetic, door position switch
 1/2" gap, NO / NC, SPDT
 7/16" diameter, flush mount
-




PUSH PLATE PACKAGES

ALL-IN-ONE PACKAGE CONTAINING PUSH PLATES, WIRELESS TRANSMITTERS AND RECEIVERS, AND MOUNTING OPTIONS

Customizable

Flexible solution offering variety of push plate, mounting, and wireless options

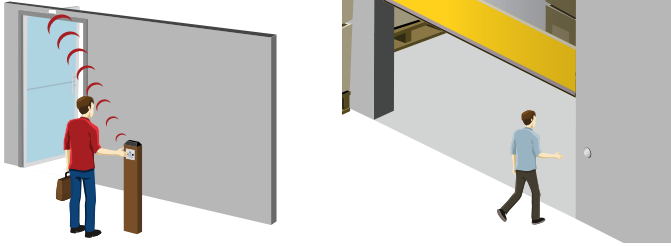

PRODUCT SERIES

PANTHER 1	(1) PANTHER plate, any style (pg 64) (1) 10RD433 or 10RD433EH receiver (pg 56) or 10RD900 receiver (pg 57)
PANTHER 2	(2) PANTHER plate, any style (pg 64) (1) 10RD433 or 10RD433EH receiver (pg 56) or 10RD900 receiver (pg 57)
PUSH PLATE 1	Choice of (1) PUSH PLATE, any style* (pg 59 – 66) (1) Matching surface- or flush-mount box (1) Receiver and (1) Transmitter, any frequency (pg 55 – 57) <i>*does NOT include LPR36, JAMB, VESTIBULE, PANTHER, or MAGIC SWITCH</i>
PUSH PLATE 2	Choice of (2) PUSH PLATES, any style* (pg 59 – 66) (2) Matching surface- or flush-mount boxes (1) Receiver and (2) Transmitters, any frequency (pg 55 – 57) <i>*does NOT include LPR36, JAMB, VESTIBULE, PANTHER, or MAGIC SWITCH</i>
PUSH PLATE 3	Choice of (1) jamb PUSH PLATE, any style (pg 62) (1) Matching surface-mount box (1) Receiver and (1) Mini transmitter, any frequency (pg 55 – 57)
PUSH PLATE 4	Choice of (2) jamb PUSH PLATES, any style (pg 62) (2) Matching surface-mount boxes (1) Receiver and (2) Mini transmitters, any frequency (pg 55 – 57)
PUSH PLATE 45 ONE-BOX SOLUTION	Choice of (2) 4 ½ in square PUSH PLATES, any style (pg 59) (2) 4 ½" square, surface-mount boxes (1) 433 MHz receiver and (2) 3-volt or 9-volt 433 MHz transmitters (pg 56)



One-Box Solution

Convenient solutions available

PUSH PLATE 45 900 ONE-BOX SOLUTION	Choice of (2) 4 ½ in square PUSH PLATES, any style (pg 59) (2) 4 ½" square, surface-mount boxes (1) 10TD900PB transmitter and (1) 10RD900 receiver (pg 57)
VESTIBULE 900	(1) 10PBDGP1 - Vestibule PUSH PLATE (pg 66) (1) 4 ¾" square, surface-mount box (2) PUSH PLATE options* with matching mounting boxes (pg 59 – 66) (4) 10TD900PB - 3-volt transmitters and (2) 10RD900 receivers (pg 57) <i>*options include (2) PBS series, (2) PBS45 series, (2) PBS6 series, (2) PBR45 series, (2) PBR series or (2) PBJ series</i>
VESTIBULE PACKAGE	(1) 10PBDGP1 - Vestibule PUSH PLATE (pg 66) (1) 4 ¾" square, surface-mount box (2) PUSH PLATE options* with matching mounting boxes (pg 59 – 66) (4) 3-volt OR 9-volt transmitters and (2) 10RD433 or 10RD433EH receivers (pg 56) <i>*options include (2) PBS series, (2) PBS45 series, (2) PBS6 series, (2) PBR45 series, (2) PBR series or (2) PBJ series</i>
VESTIBULE PACKAGE 9V	(1) 10PBDGP1 - Vestibule PUSH PLATE (pg 66) (1) 4 ¾" square, surface-mount box (2) PUSH PLATE options* with matching mounting boxes (pg 59 – 66) (4) 10TD433PB9V - 9-volt transmitters and (2) 10RD433 or 10RD433EH receivers (pg 56) <i>*options include (2) PBS series, (2) PBS45 series, (2) PBS6 series, (2) PBR45 series, (2) PBR series or (2) PBJ series</i>



SECURITY PUSH PLATE PACKAGES

CONVENIENT PACKAGES BUILT WITH BEA'S MOST POPULAR PUSH PLATES




Customizable

Choose from these convenient one-box solutions that include our most popular mounting option, push plate artwork, and wireless transmitters and receivers

One-Box Solutions

Packages available for vestibule and other common knowing-act applications

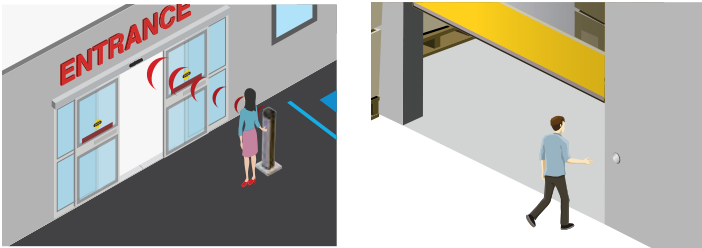

PRODUCT SERIES

PUSH PLATE 455-433	(2) 10PBS451 - square PUSH PLATES (pg 59) (2) 10BOX455SQSM - surface-mount boxes (2) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 56) (1) 10RD433 - 433 MHz receiver (pg 56)	PUSH PLATE 6R-433	(2) 10PBR1 - round PUSH PLATES (pg 61) (2) 10BOX6RNDISM - surface-mount boxes (2) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 56) (1) 10RD433 - 433 MHz receiver (pg 56)
PUSH PLATE 455-900	(2) 10PBS451 - square PUSH PLATES (pg 59) (2) 10BOX455SQSM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10RD900 - 900 MHz receiver (pg 57)	PUSH PLATE 6R-900	(2) 10PBR1 - round PUSH PLATES (pg 61) (2) 10BOX6RNDISM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10RD900 - 900 MHz receiver (pg 57)
PUSH PLATE 455-BR2900	(2) 10PBS451 - square PUSH PLATES (pg 59) (2) 10BOX455SQSM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10BR2900 - 2-relay, logic module (pg 51)	PUSH PLATE 6R-BR2900	(2) 10PBR1 - round PUSH PLATES (pg 61) (2) 10BOX6RNDISM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10BR2900 - 2-relay, logic module (pg 51)
PUSH PLATE 455-HW	(2) 10PBS451 - square PUSH PLATES (pg 59) (2) 10BOX455SQSM - surface-mount boxes HARDWIRED SOLUTION ONLY	PUSH PLATE JAMB-433	(2) 10PBJ1 - jamb PUSH PLATES (pg 62) (2) 10BOXJAMBISM - surface-mount boxes (2) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 56) (1) 10RD433 - 433 MHz receiver (pg 56)
PUSH PLATE 475 EBA-900	(2) 10PBS1 - square PUSH PLATES (pg 60) (2) 10BOX475SQSM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10RD900 - 900 MHz receiver (pg 57)	PUSH PLATE JAMB-900	(2) 10PBJ1 - jamb PUSH PLATES (pg 62) (2) 10BOXJAMBISM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10RD900 - 900 MHz receiver (pg 57)
PUSH PLATE 475S-433	(2) 10PBS1 - square PUSH PLATES (pg 60) (2) 10BOX475SQSM - surface-mount boxes (2) 10TD433PB9V - 9-volt 433 MHz transmitter (1) 10RD433 - 433 MHz receiver (pg 56)	VESTIBULE PACKAGE 433	(1) 10PBDGP1 - vestibule PUSH PLATE (pg 66) (1) 10BOX475SQSM - surface-mount boxes (2) 10PBS1 with matching mounting boxes (pg 60) (4) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 56) (2) 10RD433 - 433 MHz receiver (pg 56)
PUSH PLATE 475S-900	(2) 10PBS1 - square PUSH PLATES (pg 60) (2) 10BOX475SQSM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10RD900 - 900 MHz receiver (pg 57)	VESTIBULE PACKAGE 900	(1) 10PBDGP1 - vestibule PUSH PLATE (pg 66) (1) 10BOX475SQSM - surface-mount boxes (2) 10PBS1 with matching mounting boxes (pg 60) (4) 10TD900PB - 900 MHz transmitter (pg 57) (2) 10RD900 - 900 MHz receiver (pg 57)
PUSH PLATE 475S-BR2900	(2) 10PBS1 - square PUSH PLATES (pg 60) (2) 10BOX475SQSM - surface-mount boxes (2) 10TD900PB - 900 MHz transmitter (pg 57) (1) 10BR2900 - 2-relay, logic module (pg 51)		
PUSH PLATE 475S-HW	(2) 10PBS1 - square PUSH PLATES (pg 60) (2) 10BOX475SQSM - surface-mount boxes HARDWIRED SOLUTION ONLY		



REQUEST-TO-EXIT PACKAGES

CONVENIENT DOOR PACKAGES FOR REQUEST-TO-EXIT APPLICATIONS




Customizable

Select your choice of MAGLOCK DS (available in either 600 or 1200 lb holding force) and your choice of BEA exit sensor (either R2E-100 or FLY Kit)

One-Box Solutions

Convenient packages offer superior pricing and whole-door solution

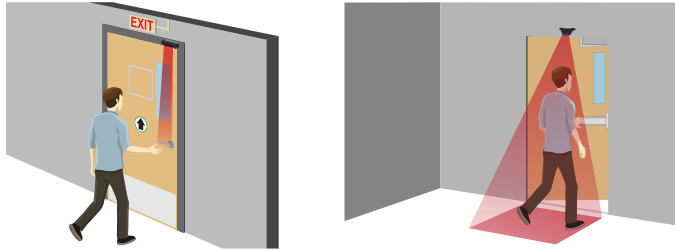

PRODUCT SERIES

- | | |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10ACP12DS | <ul style="list-style-type: none"> (1) 10R2E100 - UL / ULC Listed, active infrared request-to-exit detector specifically designed for access control applications (pg 34) (1) 10PS12-24 - UL, filtered and regulated power supply (pg 107) (1) 10ACPBSS1 - Push-to-Exit button (pg 76) (1) 10BR3X - programmable 3-relay logic module (pg 52) (1) 10MAGLOCK1ULDS - 1200 lb MAGLOCK (pg 88) |
| 10ACP6DS | <ul style="list-style-type: none"> (1) 10R2E100 - UL / ULC Listed, active infrared request-to-exit detector specifically designed for access control applications (pg 34) (1) 10PS12-24 - UL, filtered and regulated power supply (pg 107) (1) 10ACPBSS1 - Push-to-Exit button (pg 76) (1) 10BR3X - programmable 3-relay logic module (pg 52) (1) 10MAGLOCK3ULDS - 600 lb MAGLOCK (pg 90) |

- | | |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10ACP12FDS | <ul style="list-style-type: none"> (1) 10FLYKITB - Request-to-Exit sensor (pg 18) (1) 10PS12-24 - UL, filtered and regulated power supply (pg 107) (1) 10ACPBSS1 - Push-to-Exit button (pg 76) (1) 10BR3X - programmable 3-relay logic module (pg 52) (1) 10MAGLOCK1ULDS - 1200 lb MAGLOCK (pg 88) |
| 10ACP12FDS | <ul style="list-style-type: none"> (1) 10FLYKITB - Request-to-Exit sensor (pg 18) (1) 10PS12-24 - UL, filtered and regulated power supply (pg 107) (1) 10ACPBSS1 - Push-to-Exit button (pg 76) (1) 10BR3X - programmable 3-relay logic module (pg 52) (1) 10MAGLOCK3ULDS - 600 lb MAGLOCK (pg 90) |



EMERGENCY ADD-ON KIT

FOR SINGLE-OCCUPANCY RESTROOMS



For Outside Signaling

"ASSISTANCE REQUIRED" signal (LED + adjustable sounder)

Combined Unit for Ease of Installation

"PUSH FOR EMERGENCY ASSISTANCE" button + indicator (LED + selectable sounder)

Signage Available in English and French

Double-sided signage offers French and English emergency notice

Code Compliant

Ontario Regulation 368 / 13 compliant



TECHNICAL SPECIFICATIONS

10ARS	
Lamp Voltage Rating	28 VAC/VDC
Sounder Voltage Rating	16 – 25 VAC/VDC
Sounder Current Rating	15 mA
Lamps	Miniature bayonet type (#313)
Mounting	Fits standard single-gang
Sounder/Lamp Terminal	2 pigtail wires (each)
Materials	Stainless steel and PC
Dimensions	
Single-gang faceplate	2 ¾" (W) x 4 ½" (H)
White Lens (B-31695)	2 ¼" (W) x 4" (H) x 3 ⅛" (D)
10EBUTTONCOMBO	
Voltage	12 – 24 VAC/VDC ±10%
Indication	Audible buzzer (selectable on/off) and visual LED
Text Inserts	10
Button	E-stop button Push on / Pull off
Materials	Stainless steel and PC
Accessory	Rubber weather gasket included
Certifications	FCC
Dimensions	4 ½" (W) x 4 ½" (H)
70.5675	
Material	Polystyrene
Dimensions	12" (W) x 5 ½" (H)
Language	Double-sided, French/English

PRODUCT SERIES

10EMERGENCYKIT	Emergency Add-On Kit includes: (1) 70.5675, (1) 10EBUTTONCOMBO, and (1) 10ARS
10ARS	"Assistance Required" Signal
70.5675	Emergency signage
10EBUTTONCOMBO	"Push for Emergency Assistance" Double Gang Button + Indicator
10RESTROOMKIT	Restroom Kit includes: (1) 10PTLBUTTON, (1) 10LEDSOUNDER, (1) 10SWITCH1084, and (1) 10BR3X
1012VAC	12 VAC (20 VA) transformer
1024VAC	24 VAC (40 VA) transformer



RESTROOM KIT

FOR SINGLE-OCCUPANCY, NORMALLY LOCKED/UNLOCKED RESTROOMS



Advanced Logic with Restroom Functionality


BR3-X (13-function advanced logic module) controls locking and sequencing functionality

Highly Visible and Audible

Occupied Indicator with LED

Visual Lock Confirmation

Push-to-Lock Button with LED

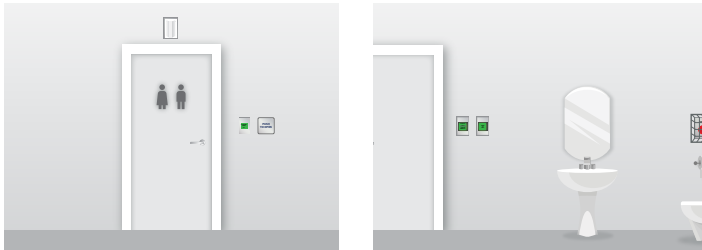

Door Position Reset For Proper Functionality

Door position switch ensures proper positioning of the door before resetting the system

Code Compliant

Ontario Regulation 368/13 compliant

TECHNICAL SPECIFICATIONS

10BR3X

See page 52

10LEDSOUNDER

Voltage 12 – 24 VAC/VDC ±10%
Indication Audible buzzer (selectable on/off) and visual LED

Text Inserts 10

Material Stainless steel

Certifications FCC

10PTLBUTTON

Switch SPST

Voltage Max. 125 / 250 VAC

Current Max. 10 A

Power Max. 373 W

Electrical Configuration SPDT

High-volt Bulb

Input voltage 15 – 24 VAC/VDC
Current 0.06 A

Low-volt Bulb

Input voltage 12 – 14 VAC/VDC
Current 0.19 A

Dimensions 2 1/13" (W) x 4 1/2" (H) x 3/4" (D)

10SWITCH1084

Switching Voltage Max. 30 VAC/VDC

Switching Current Max. 0.25 A

Power Max. 3.0 W


Electrical Configuration SPDT

Loop Type Open or closed

Gap Distance Max. 2"


PRODUCT SERIES

10RESTROOMKIT	Restroom Kit includes: (1) 10PTLBUTTON (1) 10LEDSOUNDER (1) 10SWITCH1084 (1) 10BR3X
10BR3X	3-relay logic module
10LEDSOUNDER	Occupied indicator
10PTLBUTTON	"Push To Lock" button
10EMERGENCYKIT	Emergency Add-On Kit includes: (1) 70.5675 (1) 10EBUTTONCOMBO (1) 10ARS
10MAGLOCK1UL	1200 lb, single
10MAGLOCK3UL	600 lb, single
10STRIKECU	UNIVERSAL CYLINDRICAL electric strike
10STRIKERE	RIM EXIT electric strike
10SWITCH1084	Door position switch
10PS12-24	UL / ULC Listed power supply
1012VAC	12 VAC (20 VA) transformer
1024VAC	24 VAC (40 VA) transformer




PARALLAX PACKAGES

ALL-IN-ONE, ACTIVATION AND SAFETY PACKAGES FOR SWING DOORS

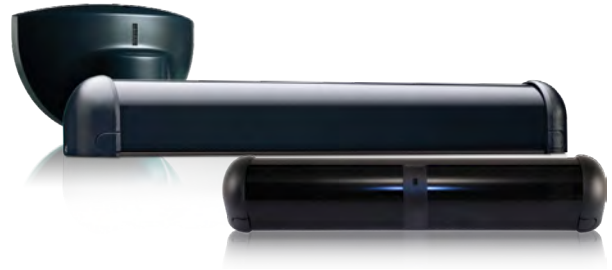

All-Around Detection

Overhead motion detection with EAGLE ARTEK, overhead presence detection with BODYGUARD-T (extension bracket included), door-mounted presence detection with SUPERSCAN T

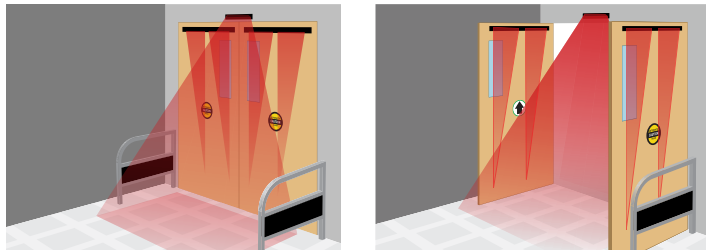

BODYGUARD-T Inhibition

Lock out module (sold separately) to inhibit header-mounted safety sensor (BODYGUARD-T) while door is closing

PRODUCT SERIES

- | | |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PARALLAX I | <ul style="list-style-type: none"> (1) 10EAGLEARTEK - Overhead activation sensor (pg 12) (1) 10BODYGUARDT - Header-mounted safety sensor (pg 17) (2) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 35 - 37) (1) 10BODYMNT - Spacer for BODYGUARD-T (pg 17) (1) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 35 - 37) (1) 1024VAC - Power supply (pg 107) |
| PARALLAX II | <ul style="list-style-type: none"> (1) 10EAGLEARTEK - Overhead activation sensor (pg 12) (1) 10BODYGUARDT - Header-mounted safety sensor (pg 17) (4) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 35 - 37) (1) 10BODYMNT - Spacer for BODYGUARD-T (pg 17) (2) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 35 - 37) (1) 1024VAC - Power supply (pg 107) |

- | | |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PARALLAX DE | <ul style="list-style-type: none"> (2) 10EAGLEARTEK - Overhead activation sensor (pg 12) (2) 10BODYGUARDT - Header-mounted safety sensor (pg 17) (4) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 35 - 37) (2) 10BODYMNT - Spacer for BODYGUARD-T (pg 17) (2) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 35 - 37) (1) 1024VAC - Power supply (pg 107) |
| PARALLAX II DE LITE | <ul style="list-style-type: none"> (2) 10EAGLEARTEK - Overhead activation sensor (pg 12) (2) 10BODYGUARDT - Header-mounted safety sensor (pg 17) (2) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 35 - 37) (2) 10BODYMNT - Spacer for BODYGUARD-T (pg 17) (2) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 35 - 37) (1) 1024VAC - Power supply (pg 107) |

BOLLARDS


MOUNTING POST FOR PUSH PLATES

Enhances Accessibility

Compatible with most push plate shapes and sizes, bollards provide a mounting surface for ADA-compliant actuators

Versatile Mounting

Can be mounted either on existing concrete or in newly poured concrete

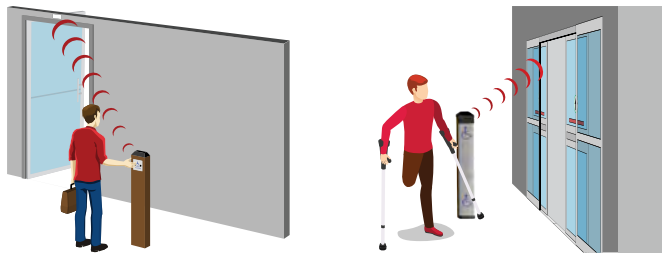

Variety Of Styles Available

Available in silver, bronze, and black and with or without hole

Wireless Compatibility

UV-resistant ABS plastic cap allows for transmission when using wireless transmitters



TECHNICAL SPECIFICATIONS

Dimensions (with cap)	41 1/2" (H) x 6 1/4" (W) x 4 1/4" (D)
Materials	
Post	Powder-coated, carbon steel (exterior + partial interior)
Cap	UV-resistant ABS
Bracket	Stainless steel
Push Plate Compatibility*	4 1/2" square, 4 3/4" square (including PANTHER) Dual-vestibule, 4 1/2" round
Weight	35 lb
Color	Black, bronze, or silver
Hardware	
Post	1/2" x 13 UNC x 1" socket-head bolts (4) – 5/16" hex
Cap	#6 x 3/4" sheet metal screws (3) and #6 finishing washers (3)
Bracket	3" expansion anchors (4), lock washers (4), and nuts (4)

* "Without hole" versions will accommodate 6" square and 6" round PANTHER plates as well as surface-mount card readers, keypads, or other surface-mount devices.

PRODUCT SERIES

10BOLLARDBLK*	Mounting post for stainless steel push plates (black)
10BOLLARDSLV*	Mounting post for stainless steel push plates (silver)
10BOLLARDBRZ*	Mounting post for stainless steel push plates (bronze)
10BOLLARDBLKWOH*	Mounting post without precut mounting holes (black)
10BOLLARDSLVWOH*	Mounting post without precut mounting holes (silver)
10BOLLARDBRZWOH*	Mounting post without precut mounting holes (bronze)
50.0073	Plastic, transmitter shelf for BOLLARD
50.5320	BOLLARD hardware pack includes: Larger compression bolts Undercut screws Washers
70.0195	BOLLARD cap
70.5022	U-shaped BOLLARD mounting bracket (bracket only), larger screw holes

* All bollards include: 50.0073, 50.5320, 70.0195, and 75.5022.

MOUNTING BOX EBA

MOUNTING BOX WITH EASY BATTERY ACCESS



Unique Two-Piece Design

- Ensures easy installation
- Allows for quick battery replacement compared to standard mounting boxes
- Eliminates the need to disassemble the push plate from the back
- Improves wireless transmitter accessibility compared to small change-out compartments

Convenient Access

Locking screw secures box to mounting plate

Compatibility

Designed for BEA's most popular push plate design



TECHNICAL SPECIFICATIONS

Dimensions	5 13/32" (W) x 5 13/32" (H) x 1 3/32" (D)
Materials	
Box	ABS
Locking Screw	Stainless steel

PRODUCT SERIES

10BOX475SQSMEBA	Mounting box with easy battery access
10PBS	4 3/4" square push plate, "Push To Open" text only
10PBS1	4 3/4" square push plate, "Push To Open" text and accessibility logo
10PBSLL	4 3/4" square push plate, accessibility logo only
10PBS10	4 3/4" square push plate, plain
10PBSE	4 3/4" square push plate, "Push To Exit" text only
10PBS1B	4 3/4" square push plate, white on blue "Push To Open" text and accessibility logo
10PBS1SB	4 3/4" square push plate, blue on satin brass "Push To Open" text and accessibility logo
10TD900PB	Hardwired transmitter
10TD433PB3V	Wired transmitter, with flag connectors, 1-button (3-volt battery)
10TD433PB9V	Wired transmitter, with flag connectors, 1-button (9-volt battery)
10WRSQ475	PBS series weather ring

INSTALLATION ACCESSORIES

BEA'S LINE OF SUPPLEMENTAL DOOR ACCESSORIES

PRODUCT SERIES

10TECHKIT	Includes BEA Spotfinder, BEA Universal Remote Control, Door Pressure Gauge, and a BEA Screwdriver
10DOORSWITCH	On / Off / Hold Open switch
10DPG50	Door pressure gauge, 50 lbs
10REL12VAC	DPDT isolation relay 12 VAC only
10REL12VDC	DPDT isolation relay 12 VDC only
10REL24V	DPDT isolation relay 24 VAC only
10REL24VDC	DPDT isolation relay 24 VDC only
10REMOTE	Universal remote control for sensor setup
10SPOTFINDER	Active-infrared-spot finder
10SWITCH75	Magnetic, door position switch ½" gap, NO / NC, SPDT 0.44" diameter, flush mount
10SWITCH1076	Magnetic, door position switch ¾ to 2" gap, NO / NC, SPDT 0.875" diameter, flush mount
10SWITCH1084	Magnetic, door position switch 2" gap, NO, SPDT surface mount with terminal strip
10SWITCH1277	Magnetic, door position switch ½" gap, NO / NC, SPDT 0.375" diameter, flush mount
30.5580	Magnetic, door position switch ¾" gap, NO, SPST 0.375" diameter, flush mount
50.5283	Magnetic, door position switch ¾" gap, NO, SPST, flush mount



10TECHKIT



10DOORSWITCH



10DPG50



10RELXXXX



10REMOTE



10SPOTFINDER



10SWITCH75



10SWITCH1076



10SWITCH1084



10SWITCH1277



30.5580



50.5283



JAMB CAM

JAMB-MOUNTED, COLOR VIDEO CAMERA




High Resolution Video

Full-color video with resolution of 480 by 720 (480p)

Visual Coverage of Door Threshold

Wide angle lens for complete view of door and traffic flow

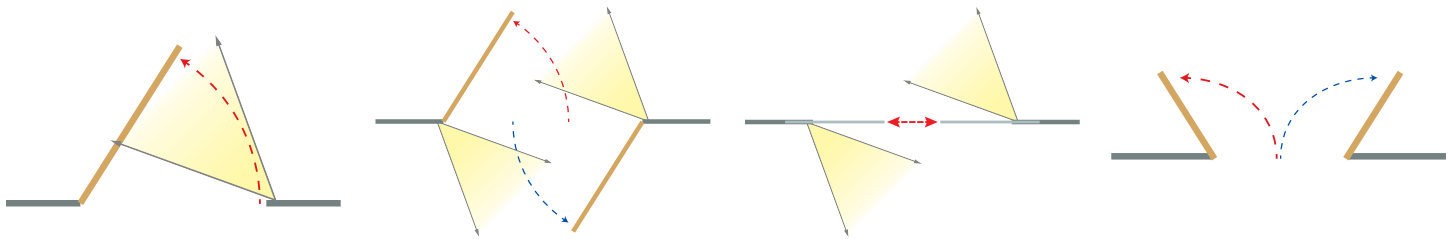

TECHNICAL SPECIFICATIONS

Supply Voltage	6.6 – 36 VDC; ±10% 6.0 – 28 VAC; ±10%
Operating Temperatures	-22 – 140 °F (relative humidity 95% max) (-30 – 60 °C)
Video Output	1.0 (Vp-p) / 75 Ω
Image Sensor	CMOS
Horizontal Resolution	480 TVL
NTSC Output	720 (H) × 480 (W)
Sync System	Inter-Sync
Frame Rate	30 fps
Minimum Illumination	0.01 LUX
AE Control	Auto
Gain Control	Auto
Electronic Shutter	1 s ~ 1/10,000 s
S/N Ratio	> 50 dB
AWB	Auto
Dimensions	1 3/4" (W) × 3" (H) × 3/4" (D)

Easy to Install

Integrated voltage regulator for installation convenience

Low-Profile Camera

Low-profile design minimizes accidental damage from shopping carts and other errant objects

PRODUCT SERIES

10JAMBCAM	Jamb-mounted, color video camera
10IXIODT1V	IXIO-DT1 with integrated video
20.2006	14' camera harness and power supply



POWER SUPPLIES AND TRANSFORMERS

Can be used with select BEA products that require additional power

TECHNICAL SPECIFICATIONS

10PS12-24

Output (Power Supply)

VDC	12 VDC	24 VDC
Switch Position	SW1 open	SW1 closed
Max. Stand-by Load DC	1.75 A	1.75 A
Max. Alarm Load DC	1.75 A	1.75 A
Battery (optional)	12 VDC	24 VDC

Output (Stand-by)

VDC	12 VDC / 7 AH battery	12 VDC / 7 AH battery
4 Hr. of Stand-by and 5 Minutes of Alarm	Stand-by = 1.25 A	Alarm = 1.25 A

Input 115 VAC / 60 Hz, 0.6 amp
Fire alarm panel or access control trigger input

Supervision AC fail supervision (form "C" contacts)
AC input and DC output LED indicators
Short circuit and thermal overload protection
Unit includes: power supply, transformer and enclosure

Visual Indicators AC input and DC output LED indicators

Enclosure Dimensions 7 1/2" (W) x 8 1/2" (H) x 3 1/2" (D)

Norm Conformity UL Listed (UL294), ULC Listed - CSA Standard C22.2, No.205-M1983, Signal Equipment, CSFM (California State Fire Marshal) Approved, MEA - NYC Dept. of Buildings Approved, NFPA 101 (Life Safety)

10PS12-24D

Battery Backup Maximum charge current: 400mA
Automatic switch over to stand-by battery when AC fails

Output (Power Supply)

VDC	12 VDC	24 VDC
Switch Position	SW1 open	SW1 closed
Max. Stand-by Load DC	1.75 A	1.75 A
Max. Alarm Load DC	1.75 A	1.75 A
Battery (optional)	12 VDC	24 VDC

Output (Stand-by)

VDC	12 VDC / 7 AH Battery	12 VDC / 7 AH Battery
4 Hr. of Stand-by and 5 Minutes of Alarm	Stand-by = 1.25 A	Alarm = 1.25 A

Battery not included

Output Selectable 12 VDC or 24 VDC power limited outputs
Class 2 Rated power limited outputs
1.75 A continuous supply current at 12 VDC or 24 VDC
Filtered and electronically regulated output
Short circuit and thermal overload protection

Input 115 VAC / 60 Hz, 0.6 A

Supervision AC fail supervision (form "C" contacts)
Dry trigger output (form "C" contacts)

Fire Alarm Interface Dry trigger input

Visual Indicators AC input and DC output LED indicators

Enclosure Dimensions 13 1/2" (W) x 13" (H) x 3 1/4" (D)

Norm Conformity UL Listed for Access Control Systems (UL294), ULC Listed - CSA Standard C22.2



10PS12-24



10PS12-24D



10PSST242




10PSMDR2024



10PSVR5T



1012VAC



1024VAC

10PSVR5T

Input 24 VAC or 24 VDC
Output 5 VDC (VR1TM5) or 12 VDC output.
Filtered and electronically regulated output
Built-in overload protection

Visual Indicators Power LED indicator

Features Modular connector/cable assembly facilitates ease of wiring
Compact design allows for integration in a wide range of camera housings

Enclosure Dimensions
VR5T / VR5BT 3 3/8" (W) x 1 1/8" (H) x 2 1/2" (D)
All Other Units 1 3/8" (W) x 1" (H) x 2 3/8" (D)

Degree of Protection CE

10PSMDR2024

Input
Voltage Range 85 – 264 VAC, 120 – 370 VDC
Frequency Range 47 – 63 Hz

Output
DC Voltage 24 V
Rated Current 1A
Rated Power 24 W

Enclosure Dimensions 7/8" (W) x 3 1/2" (H) x 4" (D)

PRODUCT SERIES

10PS12-24	UL / ULC Listed power supply
10PS12-24D	UL / ULC Listed power supply with backup circuit (1.75 A) <i>battery NOT included</i>
10PSMDR2024	DIN rail power supply, 100 – 240 VAC / 24 VDC
10PSVR5T	Voltage regulator, 24 VAC / 24 VDC
1012VAC	12 VAC (20 VA) transformer
1024VAC	24 VAC (40 VA) transformer
10PSST242	Plug-in power supply



WHERE TO FIND OUR SOLUTIONS

All over the world, people pass through automatic doors, gates and other transportation equipment every day. BEA offers a wide variety of convenient, safe and reliable solutions for on- and off-door applications. No matter the environment, sensing solutions can reduce energy costs, protect equipment and increase accessibility.

us.BEAsensors.com/en/Where-To-Find-Us/



INDEX

A

ACCESS CONTROL PUSH BUTTON 76

B

BEAMBOX 38

BODYGUARD-T 17

adjustable mounting clips 17

cable, quick-disconnect 17

end caps and mounting screws 17

extrusion housing 17

harness, 8-conductor, 4.5' (see WIRING)

lens 17

light pipe and cover 17

pin connector, 7-position (see WIRING)

rain cover 17

relay harness (see WIRING)

spacer 17

BOLLARDS 66, 103

cap 103

hardware pack 103

mounting bracket 103

transmitter shelf 103

BR2-900 51, 66, 67

BR3-X 52, 101

C

CABLE (see WIRING)

COLIBRI ONE 11

D

DOOR POSITION SWITCHES 101, 105

DOOR PRESSURE GAUGE 105

DOOR SWITCH ON / OFF / HOLD OPEN 28, 105

E

EAGLE ARTEK 12

bracket accessory 12

ceiling accessory 12

rain accessory 12

replacement covers 12

retrofit interface 12

sensor 12

ELECTRIC STRIKES

cylindrical universal 79, 80, 101

rim exit 79, 80, 101

ELECTROMAGNETIC LOCKS (see MAGLOCKS)

F

FALCON FAMILY 13

FALCON harnesses (see WIRING)

FALCON EX FAMILY 14

FALCON EX harnesses (see WIRING)

FLY KIT 18

FLY KIT, extended relay time 18

FLY KIT PARTS

cable, 4-conductor 18

FOCUS FAMILY

FOCUS 19

FOCUS harness (see WIRING)

lens extrusion 19

FOCUS 2 19

FOCUS 2 harness (see WIRING)

lens extrusion 19

SMART FOCUS 19

SMART FOCUS surface-mount adapter 19

cable, 6-conductor w/socket 19

G

GATELOCKS, UL LISTED 84

"L" and "Z" brackets 84

H

HARNESS (see WIRING)

I

ISOLATION RELAYS 105

IS40 41

IS40P 20

cable, 8-pin conductor (see WIRING)

IS40XL 41

IXIO-DT1 42

IXIO-DT1 INDUSTRIAL 43

IXIO-DT1V 44, 106

IXIO-ST 21

IXIO-ST INDUSTRIAL 22

IXIO FAMILY PARTS

bracket accessory 21, 22, 42, 43, 44

camera harness (see HARNESS)

ceiling accessory 21, 22, 42, 43

cover and power supply harness, DT1V 44

curved door accessory 21, 22, 42, 43, 44

rain accessory 21, 22, 42, 43

harness, control (see WIRING)

harness, 10' 21, 22, 42, 43

harness, 30' 21, 22, 42, 43

harness, Optex conversion (see WIRING)

microwave antenna, narrow 42, 43, 44

microwave antenna, wide 42, 43, 44

replacement cover 21, 22, 42, 43

retrofit spacer kit 21, 22, 42, 43, 41, 45

spacer 21, 22, 42, 43, 44

J

JAMB CAM 106

camera harness (see WIRING)

K

KEYPADS

SLIMLINE KEYPAD 91

UNIVERSAL KEYPAD 91

KEYSWITCHES

COMBO PLATE, jamb 81

KEYSWITCH, jamb 81

KEYSWITCH, single gang 81

momentary switch 81

mortise cylinder, keyed alike 78, 81

mortise cylinder, keyed differently 78, 81

on/off switch 81

L

LED SIGNAL LIGHTS

column 92

modular 93

traffic 94

LOCK-OUT MODULE

lock-out harness (see WIRING)

lock-out relay, low-energy 17, 53

lock-out relay, PARALLAX 53

LZR®-FLATSCAN S 23

bracket 23

sensor 23

LZR®-FLATSCAN W 24

sensor 24

LZR®-FLATSCAN SW 25, 26

harness, control (see WIRING)

harness, primary/secondary (see WIRING)

harness, Sentrex retrofit (see WIRING)

replacement cover 26

safety system, full-energy swing-door 26

safety system, low-energy swing-door 26

sensor 26

glass door accessory 26, 27

spacer 26, 27

LZR®-FLATSCAN 3D SW 27

glass door accessory 26, 27

harness, control (see WIRING)

INDEX

harness, primary/secondary (see WIRING)	
harness, Sentrex retrofit (see WIRING)	
replacement cover	27
safety system, full-energy swing-door	
safety system, low-energy swing-door	27
sensor	27
spacer	27
LZR®-H100	28
mounting bracket accessory	25
housing bracket	25
LZR®-I30	29
LZR®-MICROSCAN T	30, 31
cable, "Y"	31
door kit, glass / fire door	30
door kit, pair / dual-egress	30
door kit, single	30
door kit, universal	30
end cap	31
harness, power supply (see WIRING)	
harness, EAGLE (see WIRING)	
harness, control (see WIRING)	
harness, system (see WIRING)	
harness, secondary for mounting kit (see WIRING)	
harness, plug-and-play (see WIRING)	
harness, primary/secondary (see WIRING)	
harness, secondary (see WIRING)	
hub	31
jamb cap	31
loop, door cord	31
mounting kit, center-pivot	30
ON / OFF / HOLD OPEN switch	31
ON / OFF / HOLD OPEN switch jumper	31
sensor	31
screws, end cap	31
screws, spacer	31
spacer	31
switch, 2-wire	31
switch, home	31
Velcro tabs	31
LZR®-S600	32
LZR®-U920	49
LZR®-U921	49
LZR®-WIDESCAN	47
adapter plate kit	47
cable, 30'	47
cable, 50'	47
replacement base	47
replacement cover	47
M	
MAGIC SWITCH FAMILY	
MS09	68
MS31	69, 70
MS41	71
MS51	72
MS51W	73
MAGIC SWITCH MOUNTING BOXES	74
MAGLOCKS	
DELAYED-EGRESS KIT	78
DELAYED-EGRESS KIT signage	78
DOUBLE 600 LB	89
DOUBLE 600 LB W/DS	90
DOUBLE 1200 LB	74
DOUBLE 1200 LB W/DS	88
CABINET, SINGLE	77
SINGLE 600 LB	89, 101
SINGLE 600 LB W/DS	90
SINGLE 1200 LB	74, 101
SINGLE 1200 LB W/DS	88
bracket kit, glass mounting	74, 88, 89, 90
cover plates (DS only)	88, 90
filler plates	74, 88, 89, 90
"L" and "Z" brackets	74, 88, 89, 90
rim housings	74, 88, 89, 90
screw pack	74, 88, 89, 90
spacers	74, 88, 89, 90

MATRIX FAMILY

loop detector, dual	54
loop detector, single	54
MATRIX harness (see WIRING)	
socket, DIN rail	54

MICROCELL ONE

control box	33
emitter/receiver set	33
jamb cap kit	33
Optex adapter kit	33

MOUNTING BOXES AND ACCESSORIES

double-gang, surface-mount	66
easy battery access	66, 104
PBRJ series, flush-mount	62
PBRJ series, surface-mount	62
PBJMS series, surface-mount (hardwired)	62
PBR6 series, flush-mount, round	61
PBR6 series, surface-mount, round	61
PBR/PBS series, mount kits	61, 104
PBS series, flush-mount, square	60, 66
PBS series, flush-mount, round	60, 66
PBS series, weather ring	60, 104
PBS45 series, escutcheon	59
PBS45 series, flush-mount, round	59
PBS45 series, flush-mount, square	59
PBS45 series, surface-mount, round	59
PBS45 series, surface-mount, square	59
PBS45 series, weather ring	59
PBS6 series, flush-mount, square	61
PBS6 series, surface-mount, square	61
PBS6 series, weather ring	61
single-gang, surface-mount	65, 82

MOUNTING BRACKETS

mounting bracket, industrial	12, 13, 14, 16, 20, 29, 32, 41, 47
mounting bracket, LZR accessory	28, 29, 32
mounting bracket, mini	12, 13, 20, 21, 22, 29, 32, 41, 42, 43, 44, 47
mounting bracket, universal	47

P

PACKAGES, ACCESS CONTROL

AC + FLY Kit + 600 lb MAGLOCK	95
AC + FLY Kit + 1200 lb MAGLOCK	95
AC + R2E-100 + 600 lb MAGLOCK	95
AC + R2E-100 + 1200 lb MAGLOCK	95

PACKAGES, LOW-ENERGY REACTIVATION

LE Package 6	96
LE Package 6 Security	96

PACKAGES, PARALLAX

PARALLAX I	102
PARALLAX II	102
PARALLAX DE	102
PARALLAX II DE LITE	102

PACKAGES, PUSH PLATE

PANTHER	97
PUSH PLATE	97
PUSH PLATE 45	97
PUSH PLATE 45 900	97
VESTIBULE 900	97
VESTIBULE PACKAGE	97
VESTIBULE PACKAGE 9V	97

PACKAGES, REQUEST-TO-EXIT

AC + FLY Kit + 600 lb MAGLOCK DS	99
AC + FLY Kit + 1200 lb MAGLOCK DS	99
AC + R2E-100 + 600 lb MAGLOCK DS	99
AC + R2E-100 + 1200 lb MAGLOCK DS	99

PACKAGES, RESTROOM KIT

button + indicator, "Push For Emergency Assistance"	100
button, "Push To Lock"	101
emergency add-on kit	100, 101
emergency add-on kit, signage	100
indicator, "Assistance Required"	100
indicator, "Occupied When Lit"	101
restroom kit	100, 101

PACKAGES, SECURITY PUSH PLATE

INDEX

PUSH PLATE 45S-433	98	(see MOUNTING BOXES)	
PUSH PLATE 45S-900	98	PUSH PLATES, VESTIBULE	66
PUSH PLATE 45S-BR2900	98	(see MOUNTING BOXES)	
PUSH PLATE 45S-HW	98	PUSH PLATES, 4.5 IN	59
PUSH PLATE 475 EBA-900	98	(see MOUNTING BOXES)	
PUSH PLATE 475S-433	98	PUSH PLATES, 4.75 IN	60
PUSH PLATE 475S-900	98	screw kit	60
PUSH PLATE 475S-BR2900	98	(see MOUNTING BOXES)	
PUSH PLATE 475S-HW	98	PUSH PLATES, 6 IN	61
PUSH PLATE 6R-433	98	screw kit	61
PUSH PLATE 6R-900	98	(see MOUNTING BOXES)	
PUSH PLATE 6R-BR2900	98		
PUSH PLATE JAMB-433	98	R	
PUSH PLATE JAMB-900	98	R2E-100	34
VESTIBULE PACKAGE 433	98	REMOTE CONTROL (UNIVERSAL)	12, 13, 14, 15,
VESTIBULE PACKAGE 900	98		16, 17, 20, 21, 22, 28, 29, 32,
PHOENIX EX™	15		38, 41, 42, 43, 44, 47, 48, 105
PIEZO BUTTON	82	S	
PNEUMATIC PUSH BUTTONS		SPARROW	16
jamb, 1 5/8 in	83	SPOTFINDER	20, 38, 41, 105
jamb, 2 in	83	SUPERSCAN-T	35
single, 1 5/8 in	83	SUPERSCAN-T INDUSTRIAL	36
single, 2 in	83	SUPERSCAN-T / INDUSTRIAL PARTS	
POWER SUPPLIES		adjustable mounting clips	37
power supply, DIN rail	28, 29, 32, 47, 49, 107	door cord jamb cap and screw	37
power supply, UL/ULC listed	29, 32, 54, 78, 84, 74, 88, 89, 90, 92, 93, 94, 95, 101, 107	door cord sheath	37
power supply, voltage regulator	29, 32, 49, 107	end cap kit	37
power supply, universal kit	31	primary unit, no housing	37
PUSH PLATES, JAMB	62	secondary unit, no housing	37
PUSH PLATES, LPR36	63	hardware kit	37
cap kit	63	harness, quick-disconnect (see WIRING)	
converter to 433 MHz wireless	63	harness, Gyrotech relay (see WIRING)	
converter to 900 MHz wireless	63	harness, Horton relay (see WIRING)	
PUSH PLATES, PANTHER	64	harness, primary (see WIRING)	
spare PCB, 433 series	64	housing, aluminum	37
spare PCB, 900 series	64	lens	37
PUSH PLATES, SINGLE GANG	65	ribbon connector	37

T

TRANSFORMERS

transformers, 12 VAC	100, 101, 107
transformers, 24 VAC	100, 101, 107

U

ULTIMO

48

harness, control (see WIRING)	
replacement cover	48
retrofit spacer kit	21, 22, 42, 43, 41, 45

W

WIRELESS, 300 MHZ FAMILY

55

battery	55
receiver, analog	55, 63
transmitter, hand-held	55
transmitter, wired w/flag connectors	55

WIRELESS, 433 MHZ FAMILY

56

battery	56
receiver, analog	56, 63
receiver, analog, extended hold	56, 63
transmitter, hand-held	56
transmitter, keychain	56
transmitter, mini hardwired	56
transmitter, wired w/flag connectors	56, 104

WIRELESS, 900 MHZ FAMILY

57

battery	57
receiver	57, 63, 68, 69
transmitter, hand-held	51, 57
transmitter, retrofit	51, 57, 68, 69
transmitter, universal	51, 57
transmitter, wired w/flag connectors	57, 104

WIRING

4-conductor cable (EAGLE)	12
7-position pin connector	17
cable, 6-conductor (SMART FOCUS)	19
cable, 4-conductor (FLY KIT)	18
cable, 8-pin conductor (IS40/P/XL)	20, 41

harness, 8-conductor	17, 29, 32
harness, 11-pin (MATRIX)	54
harness, 48 in (FOCUS)	19
harness, 240 in (FOCUS)	19
harness, camera (IXIO-DT1V)	44
harness, camera (JAMB CAM)	106
harness, control	31
harness, control (IXIO / ULTIMO)	21, 22, 42, 43, 41, 45
harness, control (LZR®-FLATSCAN 3D SW)	27
harness, control (LZR®-FLATSCAN SW)	26
harness, EAGLE	31
harness, FALCON / FALCON EX	13, 14
harness, lock-out relay	17, 53
harness, Optex conversion	42, 43
harness, plug-and-play	31
harness, power supply	31
harness, primary/secondary	31
harness, primary/secondary (LZR®-FLATSCAN 3D SW)	27
harness, relay (BODYGUARD/SUPERSCAN)	17
harness, secondary	31
harness, secondary for mounting kit	31
harness, Sentrex retrofit	26, 27
harness, system	31



**GROWING A
SAFE AUTOMATED WORLD,
CREATING PEACE OF MIND
FOR EVERYONE, EVERYWHERE**



A **Halma** company

BEA Americas / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA / 15275-1213
800 523 2462 / info-us@BEAsensors.com / BEAsensors.com

79.0000.23 | 20240517