


# CONTINUOUS HINGES

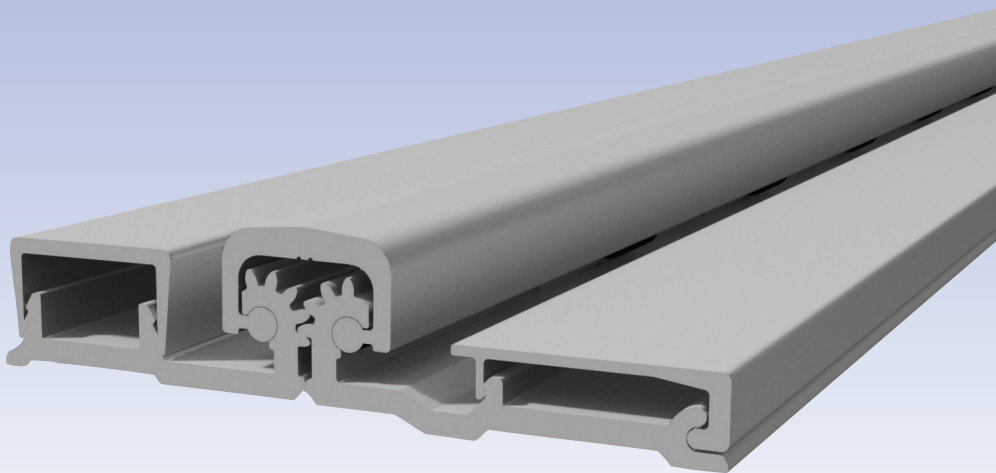

# Aluminum Continuous Geared Hinge and Stainless Steel Continuous Hinge Product Index

---

## Page

### Aluminum

Concealed	CH2 - CH7
Electric Thru Wire	CH13
EPT Prep	CH14
Full Surface	CH8 - CH9
Half Surface	CH10 - CH12
Swing Clear	CH7, CH9, CH12

### Stainless Steel


Concealed	CH15
Electric Thru Wire, Electric Power Transfer Prep	CH22
Full Surface	CH19
Full Wrap Edge Guard, Concealed	CH16
Half Mortise	CH20
Half Mortise with Half Wrap Edge Guard	CH21
Half Wrap Edge Guard, Concealed	CH17
Swing Clear with Half Wrap Edge Guard	CH18



## Numerical Index:

EPT PREP. .CH14, CH22	HD2700 . . . . .CH6	SS302. . . . .CH19
ETW8. . . . .CH13, CH22	HD4100 . . . . .CH7	SS304. . . . .CH20
HD1100 . . . . .CH2	HD4200 . . . . .CH12	SS305. . . . .CH16
HD1400 . . . . .CH4	HD5300 . . . . .CH10	SS306. . . . .CH21
HD1800 . . . . .CH3	HD5400 . . . . .CH11	SS311. . . . .CH18
HD2100 . . . . .CH9	HD5700 . . . . .CH8	SS315. . . . .CH17
HD2400 . . . . .CH5	SS300. . . . .CH15	

## Fasteners:

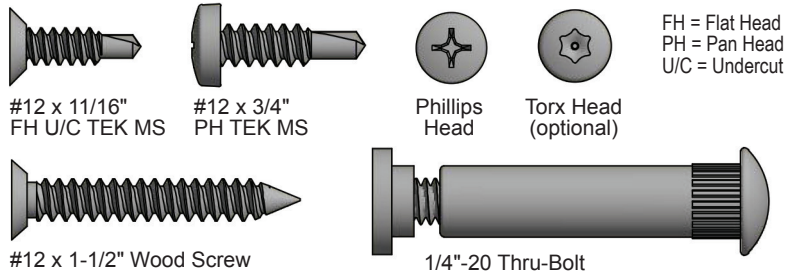

## Rating Symbols Legend



**POSITIVE PRESSURE - CERTIFIED by UL to ANSI/UL10C;** complies with IBC, NFPA 80 and NFPA 252 for application to Hollow Metal and Wood fire doors rated up to to 90 minutes. See individual products for maximum door size.



**ANSI/BHMA CERTIFIED.** Certified hinges comply with American National Standard for Continuous Hinges ANSI/BHMA A156.26 and are listed in the BHMA Certified Products Directory.

## ANSI/BHMA BHMA

The following explains ANSI/BHMA numbers which identify material and type of products. Look for the BHMA certified logo next to the product in our catalog. For a complete listing refer to the BHMA Certified Products Directory online at [www.buildershardware.com](http://www.buildershardware.com)

### ANSI/BHMA A156.26 American National Standard for Continuous Hinges

1 Product Section	2 Material	3 Product Type	4 Electrical Modifications	5 Door Weight (lbs.)	6 Grade	7 Hinge Type
"A" designates Hinges	1. Brass Bronze 3. Aluminum 5. Stainless Steel 8. Steel	1. Edge Mounted 2. Half Edge Mounted 3. Full Surface 4. Half Surface 5. Swing Clear 6. Raised Barrel 7. Wide Throw 0. Other	0. None 1. Concealed Wire Transfer 2. Monitor 3. Power Transfer 4. Other	1. 150 2. 300 3. 600 4. 1200	1. Grade 1 2. Grade 2 3. Grade 3	B. Barrel G. Geared

## LEED Green Building

The LEED (Leadership in Energy and Environmental Design) Green Building Rating System® is a national standard for developing high-performance, sustainable buildings developed by the U. S. Green Building Council. Our current LEED letter containing LEED qualification information for all our products is available at [www.ngp.com](http://www.ngp.com)

Environmental Product Declarations (EPD) prepared and certified by an Independent Laboratory based on Life Cycle Assessments (LCA) of our products and Health Product Declarations (HPD) may be viewed on our website, [www.ngp.com](http://www.ngp.com)

National Guard Products sustainability report may be viewed on our website, [www.ngp.com](http://www.ngp.com)

Contact us regarding our end of use product recycling program.

## Buy American Requirements

Over 99% of our products are produced in the United States as a domestic construction material, as defined in the Buy American Act (BAA) of March 1933 and amended by the Buy American Act of 1988 and FAR 52.225-9. A Buy American certificate may be obtained on our website, [www.ngp.com](http://www.ngp.com)

**HD1100**  
**HD1100-LL**

**Concealed Continuous Geared Hinge**  
**No Door Inset, Flush Mount**  
**for 1-3/4" Doors**

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- #12-24 TEK MS
- "LL" model for doors up to 1,000 lbs. features lead-lined dual row hole pattern
- Standard lengths: 83", 85", 95", 119"

**Available Options:**

- #12 x 1-1/2" wood screws
- Torx security TEK screws
- Cut to net length
- Anti-ligature hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

**Finishes:**


- A - anodized aluminum
- DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leafs up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

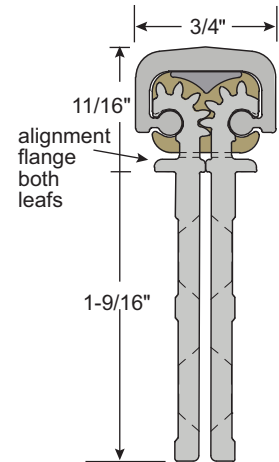

## HD1800 HD1800-LL

### Concealed Continuous Geared Hinge 1/8" Door Inset, for 1-3/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- #12-24 TEK MS
- "LL" model for doors up to 1,000 lbs. features lead-lined dual row hole pattern
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK screws
- Cut to net length - specify door handing
- Anti-ligature hospital tip - specify "ALHT" and door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:


- A - anodized aluminum
- DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leafs up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

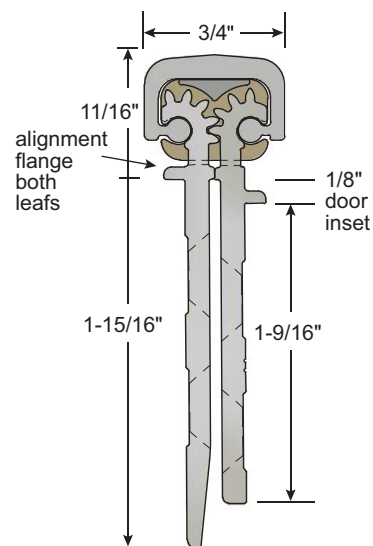

Frame leaf covers butt hinge preps



**HD1400**  
**HD1400-LL**

**Concealed Continuous Geared Hinge**  
**1/16" Door Inset, for 1-3/4" Doors**

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.


- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- #12-24 TEK MS
- "LL" model for doors up to 1,000 lbs. features lead-lined dual row hole pattern
- Standard lengths: 83", 85", 95", 119"

**Available Options:**

- #12 x 1-1/2" wood screws
- Torx security TEK screws
- Cut to net length - specify door handing
- Anti-ligature hospital tip - specify "ALHT" and door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

**Finishes:**

- A - anodized aluminum
- DKB - dark bronze anodized

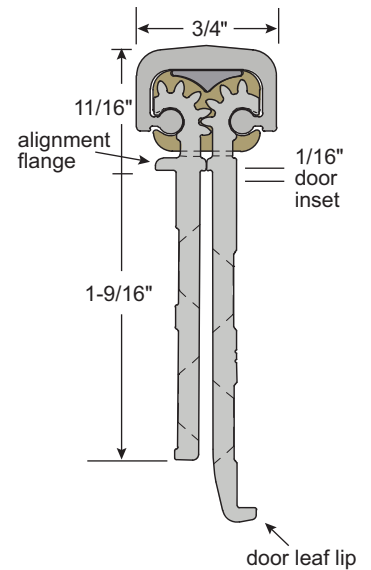

Narrow frame leaf allows NGP 2525 bulb seal



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
 Grade 1 - 150 lb. door  
 Grade 2 - 300 lb. door  
 Grade 1 - 600 lb. door



## HD2400 HD2400-LL

### Concealed Continuous Geared Hinge 1/16" Door Inset, for 1-3/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- #12-24 TEK MS
- "LL" model for doors up to 1,000 lbs. features lead-lined dual row hole pattern
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK screws
- Cut to net length - specify door handing
- Anti-ligature hospital tip - specify "ALHT" and door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:

A - anodized aluminum  
DKB - dark bronze anodized




Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leafs up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:

Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

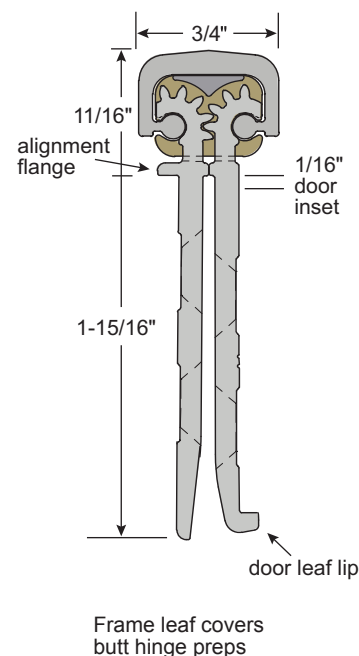

**HD2700**  
**HD2700-LL**

**Concealed Continuous Geared Hinge**  
**No Door Inset, Flush Mount for**  
**2" to 2-1/4" Doors**

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.


- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- #12-24 TEK MS
- "LL" model for doors up to 1,000 lbs. features lead-lined dual row hole pattern
- Standard lengths: 83", 85", 95", 119"

**Available Options:**

- #12 x 1-1/2" wood screws
- Torx security TEK screws
- Cut to net length
- Anti-ligature hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

**Finishes:**

- A - anodized aluminum
- DKB - dark bronze anodized

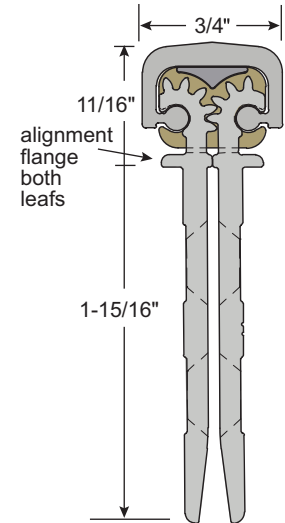

Frame leaf covers butt hinge preps



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door



## HD4100 HD4100-LL

### Concealed Swing-Clear Continuous Geared Hinge 1/16" Door Inset for 1-3/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- #12-24 TEK MS
- "LL" model for doors up to 1,000 lbs. features lead-lined dual row hole pattern
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK screws
- Cut to net length - specify door handing
- Anti-ligature hospital tip - specify "ALHT" and door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:


- A - anodized aluminum
- DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leafs up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

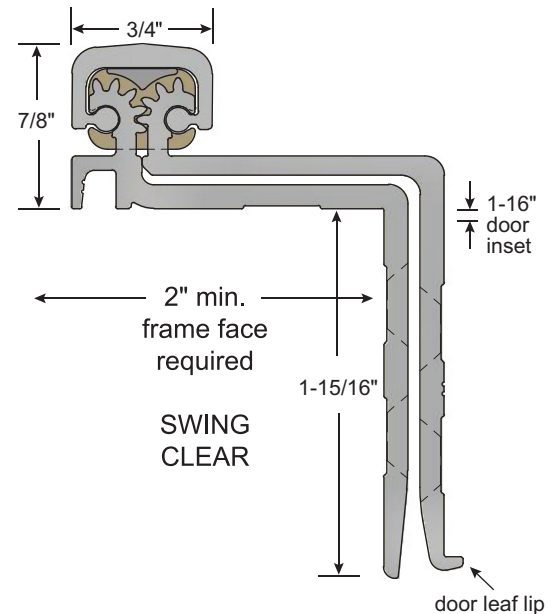

Frame leaf covers  
butt hinge preps



## HD5700

### Full Surface Continuous Geared Hinge 1/16" Door Inset for 1-3/4" to 2-1/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- Frame leaf: #12-24 TEK flat head MS
- Door leaf: #12-24 TEK pan head MS and 1/4"-20 thru-bolts
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK & T.B. M.S.
- Cut to net length - specify door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:


- A - anodized aluminum
- DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

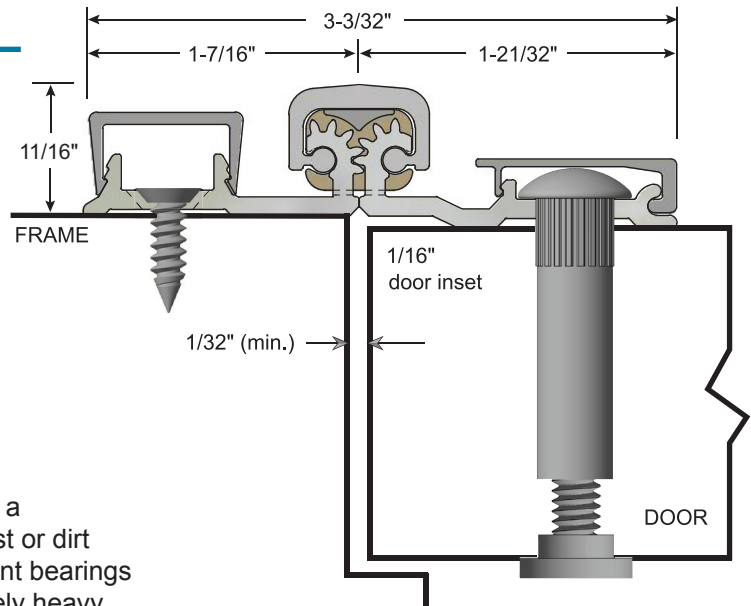

Concealed fastener covers on both leaves



## HD2100

### Full Surface Swing Clear Continuous Geared Hinge 1/32" Door Inset for 1-3/4" to 2-1/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- Frame leaf: #12-24 TEK flat head MS
- Door leaf: #12-24 TEK pan head MS and 1/4"-20 thru-bolts
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK & T.B. M.S.
- Cut to net length - specify door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:


A - anodized aluminum  
DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

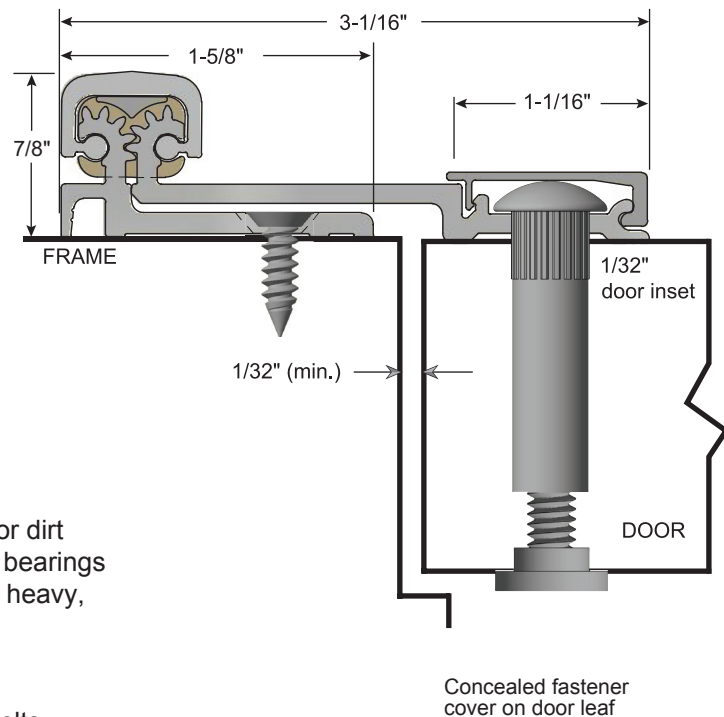

## HD5300

### Half Surface Continuous Geared Hinge 3/32" Door Inset for 1-3/4" to 2-1/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.


- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- Frame leaf: #12-24 TEK flat head MS
- Door leaf: #12-24 TEK pan head MS and 1/4"-20 thru-bolts
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK & T.B. M.S.
- Cut to net length - specify door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:

- A - anodized aluminum
- DKB - dark bronze anodized

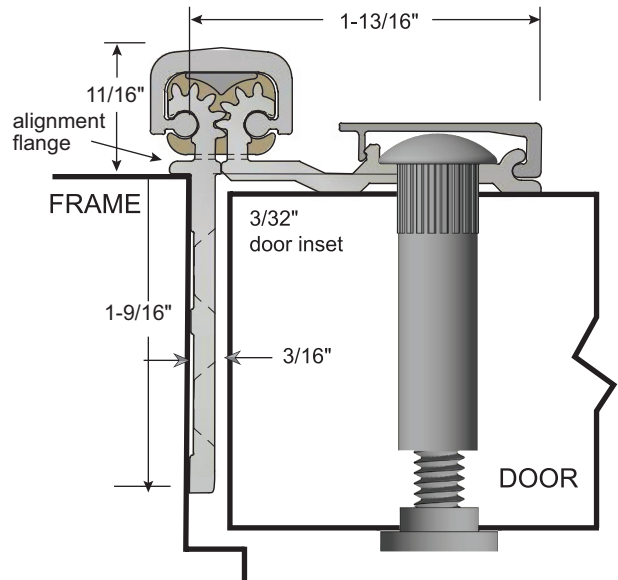

Narrow frame leaf allows NGP 2525 bulb seal  
Concealed fastener cover on door leaf



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:

- Grade 1 - 150 lb. door
- Grade 2 - 300 lb. door
- Grade 1 - 600 lb. door

## HD5400

### Half Surface Continuous Geared Hinge 3/32" Door Inset for 1-3/4" to 2-1/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- Frame leaf: #12-24 TEK flat head MS
- Door leaf: #12-24 TEK pan head MS and 1/4"-20 thru-bolts
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK & T.B. M.S.
- Cut to net length - specify door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:


- A - anodized aluminum
- DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

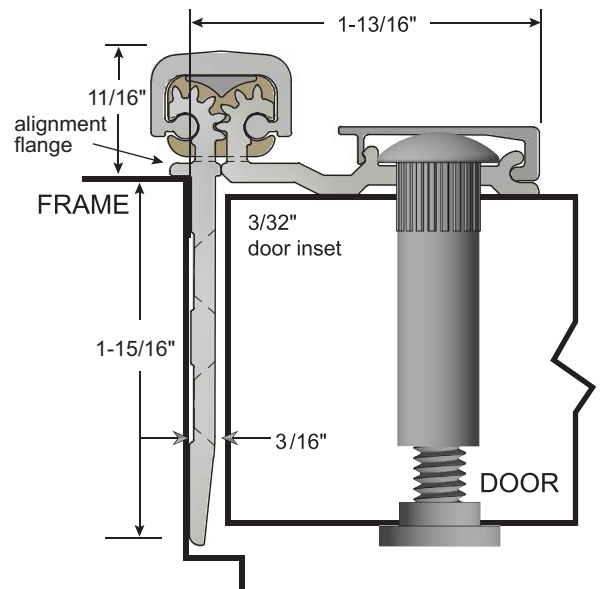

Frame leaf covers butt hinge preps  
Concealed fastener cover on door leaf





## HD4200

### Half Surface Swing Clear Continuous Geared Hinge 1/32" Door Inset for 1-3/4" to 2-1/4" Doors

Continuous geared aluminum hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Aluminum alloy 6063-T6; Anodized after machining
- Specially designed involute intermeshing gears
- Wear surfaces are lifetime anti-friction lubricated with a naturally hydrophobic graphite that doesn't attract dust or dirt
- Proprietary teflon infused self-lubricating wear resistant bearings
- No hinge reinforcement necessary except on extremely heavy, extremely high frequency or extra wide doors
- Lifetime of the door opening warranty
- Frame leaf: #12-24 TEK flat head MS
- Door leaf: #12-24 TEK pan head MS and 1/4"-20 thru-bolts
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- #12 x 1-1/2" wood screws
- Torx security TEK & T.B. M.S.
- Cut to net length - specify door handing
- Dutch door prep - specify door handing, top door leaf length, and clearance between leaves

#### Finishes:


- A - anodized aluminum
- DKB - dark bronze anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 7'2".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door  
Grade 2 - 300 lb. door  
Grade 1 - 600 lb. door

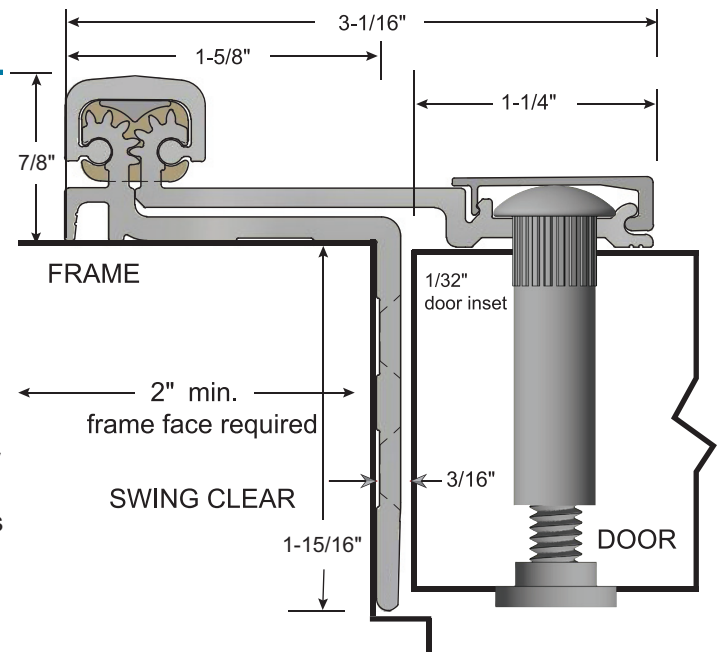

Frame leaf covers butt hinge preps  
Concealed fastener cover on door leaf





## ETW8

### Electric Thru Wire

Transfers electric power through the hinge to power certain types of electronic builders hardware.

#### Removable Electric Hinge Section

- 8 wires, 28 AWG
- Each wire is rated 50V AC/DC at 3.5A (max.) continuous, or 16A (max.) pulse; maximum pulse width is 400 msec with 10 second minimum off time between pulses
- 12" minimum wire leads
- 5 year warranty

### ETW8 - Molex

#### Electric Thru Wire with Molex Connectors

- Same features as above with molex connectors installed on wires both sides

#### Available on Models

HD1100

HD2400 (Handed)

HD2700

#### Standard Locations

<u>Hinge Length</u>	<u>Top of Hinge to Centerline</u>
83"	40-1/2"
85"	42-1/2"
95"	52-1/2"
119"	76-1/2"

All sizes located 42-1/2" centerline from bottom of hinge.



## EPT PREP

### Electric Power Transfer Prep

Allows use of electric power transfer units required to power certain types of electronic builders hardware.

- Prep available for the following electric power transfer units
  - Von Duprin EPT-2, EPT-10, EPT-10C, PNT-1
  - Adams Rite 4612 (short version only)
  - Securitron EPT, EPT-SC, EL-EPT, EL-EPT-SC
  - Dorma ES105

Available on all concealed and half surface type hinges

**Non-Handed Models:**

HD1100 HD2700

**Handed Models - Specify Door Hand**

HD1400 HD1800 HD2400 HD4100

HD4200 HD5300 HD5400

**Standard Locations:**

<u>Hinge Length</u>	<u>Top of Hinge to Centerline of Prep</u>
83"	28-7/16"
85"	30-7/16"
95"	40-1/2"
119"	64-3/8"



## SS300

### Stainless Steel Continuous Hinge Concealed, up to 1/8" Inset, for 1-3/4" Doors

Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #10 x 1/2" TEK screws for metal doors and frames
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- Electric thru wire ETW8 - see page CH22
- Electric power transfer prep - see page CH22
- US32 (629) polished finish
- Welded tips for non-rising pins




Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door

#### FULL MORTISE (EDGE MOUNT)

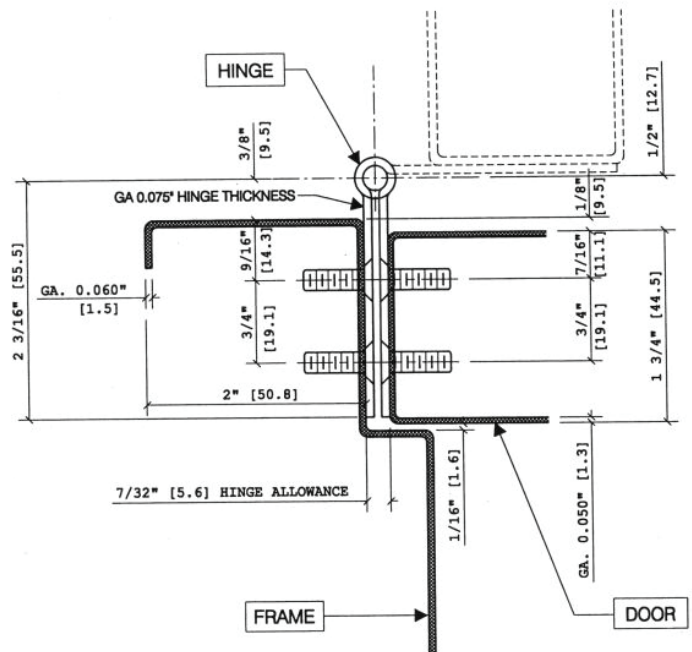

## SS305

### Stainless Steel Continuous Hinge Full Wrap Edge Guard, Concealed for 1-3/4" Doors

Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #10 x 1/2" TEK screws for metal doors and frames
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- Electric thru wire ETW8 - see page CH22
- Electric power transfer prep - see page CH22
- US32 (629) polished finish
- Welded tips for non-rising pins




Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door

#### FULL WRAP EDGE GUARD (EDGE MOUNT)

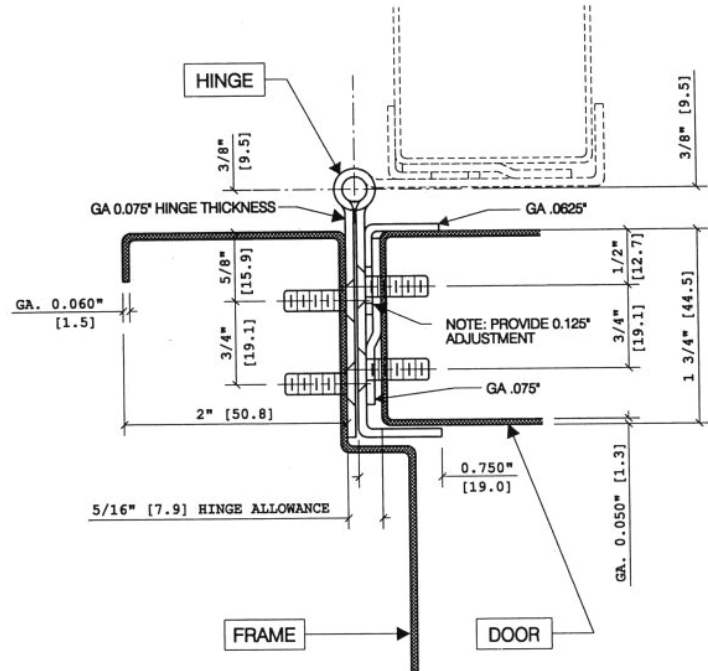

## SS315

### Stainless Steel Continuous Hinge Half Wrap Edge Guard, Concealed for 1-3/4" Doors

Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #10 x 1/2" TEK screws for metal doors and frames
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- Electric thru wire ETW8 - see page CH22
- Electric power transfer prep - see page CH22
- US32 (629) polished finish
- Welded tips for non-rising pins




Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door

#### HALF WRAP EDGE GUARD (EDGE MOUNT)

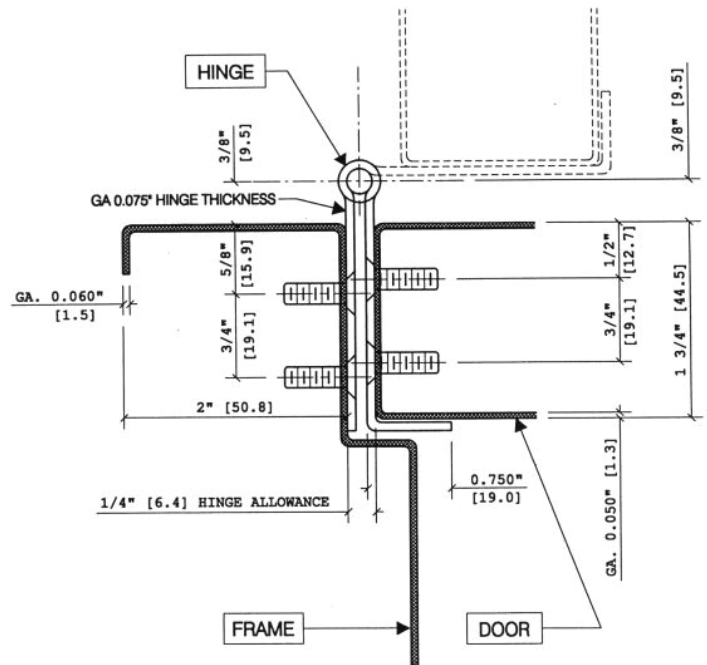



## SS311

### Stainless Steel Continuous Hinge Swing Clear with Half Wrap Edge Guard, for 1-3/4" Doors


Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #10 x 1/2" TEK screws for metal doors and frames
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- US32 (629) polished finish
- Welded tips for non-rising pins

#### SWING CLEAR HINGE GUARD

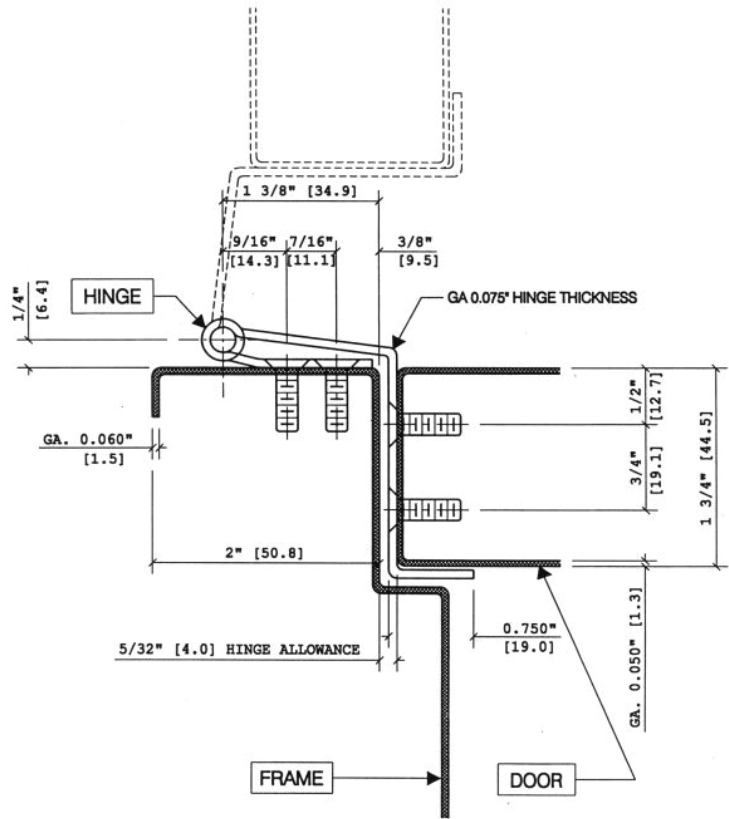

Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door



## SS302

### Stainless Steel Continuous Hinge Full Surface

Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #1/4-20 x 3/4" TEK screws for metal doors and frames
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- US32 (629) polished finish
- Welded tips for non-rising pins




Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door

#### FULL SURFACE (FLUSH)

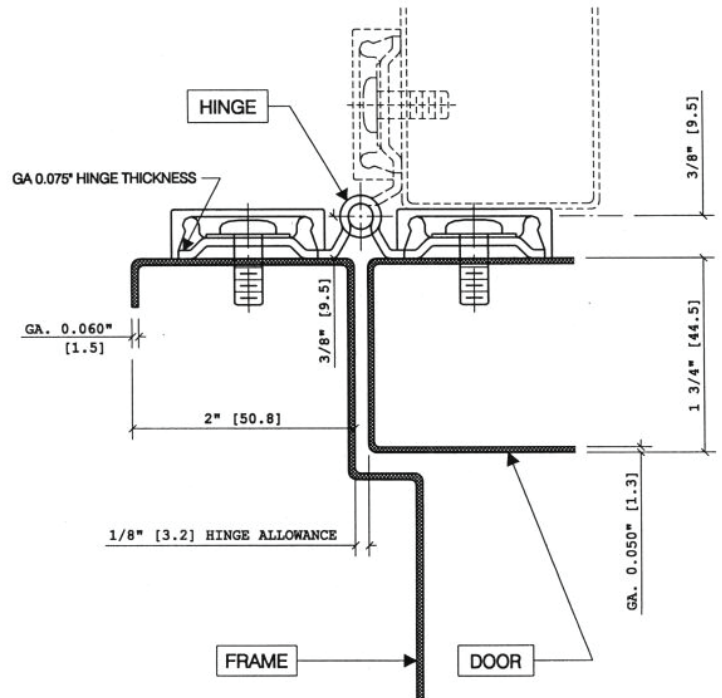

## SS304

### Stainless Steel Continuous Hinge Half Mortise, for 1-3/4" Doors


Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #1/4-20 x 3/4" TEK screws for metal frames
- #10 x 1/2" TEK screws for metal doors
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- Electric power transfer prep - see page CH22
- US32 (629) polished finish
- Welded tips for non-rising pins

### HALF MORTISE (EDGE MOUNT)

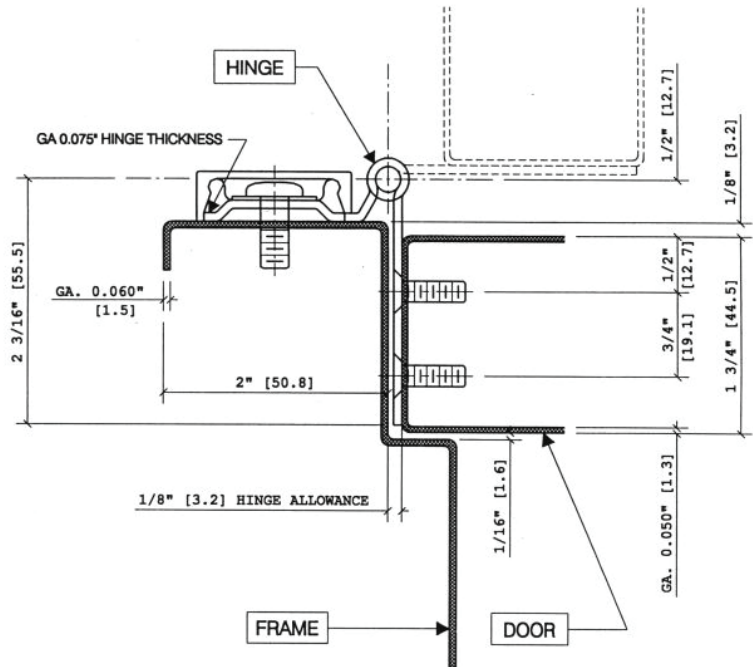

Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door

## SS306

### Stainless Steel Continuous Hinge Half Mortise with Half Wrap Edge Guard, for 1-3/4" Doors

Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #1/4-20 x 3/4" TEK screws for metal frames
- #10 x 1/2" TEK screws for metal doors
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

#### Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- Electric power transfer prep - see page CH22
- US32 (629) polished finish
- Welded tips for non-rising pins




Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:  
Grade 1 - 150 lb. door

#### HALF MORTISE/GUARD (EDGE MOUNT)

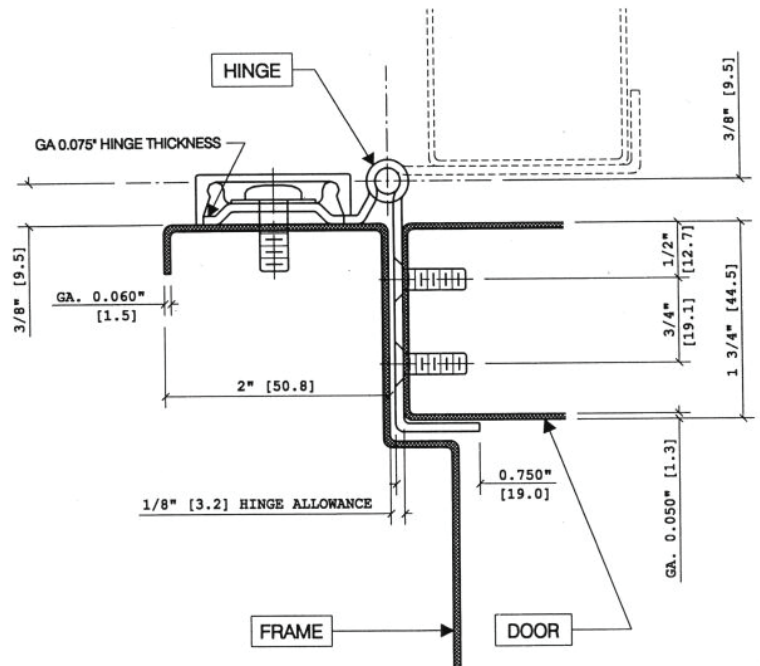

## ETW8

### Electric Thru Wire

Transfers electric power through the hinge to power certain types of electronic builders hardware.

#### Removable Electric Hinge Section

- 8 wires, 26 AWG
- Each wire is rated 24V AC/DC at 0.5A (max.) continuous or pulse
- 12" wire leads
- 5 year warranty

#### Available on Models:

**SS300**

**SS305 (Handed)**

**SS315 (Handed)**

**Standard Location, all sizes: 39-5/8" centerline from bottom of hinge**

## EPT PREP

### Electric Power Transfer Prep

Allows use of electric power transfer units required to power certain types of electronic builders hardware.

- Prep available for the following electric power transfer units
  - Von Duprin EPT-2, EPT-10, EPT-10C, PNT-1
  - Adams Rite 4612 (short version only)
  - Securitron EPT, EPT-SC, EL-EPT, EL-EPT-SC
  - Dorma ES105

#### Available on all concealed and half surface type hinges

#### Non-Handed Models:

**SS300**

#### Handed Models - Specify Door Hand

**SS304, SS305, SS306, SS315**

#### Standard Locations:

<u>Hinge Length</u>	<u>Top of Hinge to Centerline of Prep</u>
83"	28-7/16"
85"	30-7/16"
95"	40-1/2"
119"	64-3/8"

