

# Emergency Rescue Hardware

## Emergency Door Stop

**ES-1** – (ANSI A1882) – Extruded and cast brass – standard finishes

- For converting double acting doors to single acting doors
- Emergency release allows door to swing open in opposite direction to reach ill patients who fall and block normal path of door
- Stop release resets automatically. Spring action stop, with finger-tip release, using pullman-type latch bolt with rubber bumper insert
- Refer to template for door clearance




ES-1

### 65KL5 Deadlocking Latch Specifications

**Surface plate** – 4-1/2" x 1-5/8" (114 mm x 41 mm) bolt height 2" (51 mm)

**Case** – 2-1/8" x 1-5/16" (54 mm x 33 mm)


Flat Head Screws Per Piece	Pieces Per Box	Pieces Per Case	Weight	
			Lbs.	(Kg)
4-12-24 x 1/2 brass machine screws	1	30	17	{8}

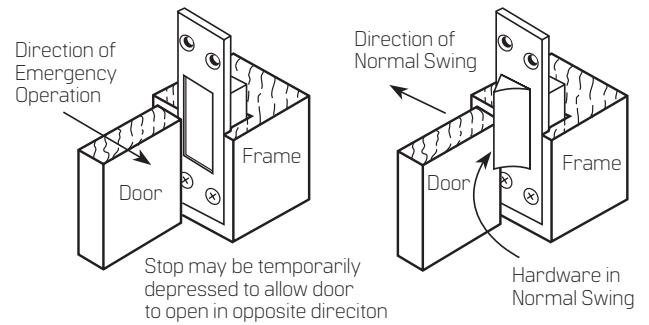

## Holdback for ES-1

**HB-1** – Steel – standard finishes

- Used with ES-1 to allow doors to become double acting by holding emergency stop in depressed position
- Attaches to surface plate of ES-1
- Packed one in envelope with mounting instructions



## Double Lipped Strikes

**DLS-1** – For 1/8" (3.2 mm) Inset hung doors – Brass – standard finishes

**DLS-2** – For center hung doors – Brass – standard finishes

- Allows center hung doors to be opened in both directions without damage to frame
- Available for 5-3/4" (146 mm) cased openings
- Latch bolt cut out is 1-1/4" x 11/16" ( 32 mm x 17.5 mm) ANSI standard for Heavy
- Duty bored type locks.
- For mortise locks consult factory.
- .093" (2.4 mm) material

### DLS- & DLS-2

Flat Head Screws Per Piece	Pieces Per Box	Pieces Per Case	Weight	
			Lbs.	(Kg)
8-32 x 1/2 brass machine screws	1	50	30	{13.6}



DLS-1

DLS-1