



The 5200 Series is also available in a **Complete One Box Solution**

5200 Series

The grade 1 solution with **horizontal adjustability**

Shown with 501 Option

The 5200 series electric strikes feature an in-frame horizontal adjustable design to simplify the installation process. This feature allows the installer to easily adjust the electric strike opening to accommodate the horizontal position of the latchbolt after the strike has been installed. This field selectable fail secure/fail safe unit is easy to install and accommodates latchbolts up to 3/4" throw.



Specifications

- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- RoHS compliant
- Patent: 5,934,720

Electrical

- .24 Amps @ 12VDC/VAC
- .12 Amps @ 24VDC/VAC
- DC continuous duty/ AC intermittent duty only
- PoE friendly

Frame Application

- Metal
- Wood

5200 Models

5200

Universal electric strike
Faceplate options ordered separately, see page 26

5200C

Complete electric strike
Includes the 501 and 501A faceplates in the box



Model 5200C includes a 501 and a 501A faceplate in the box

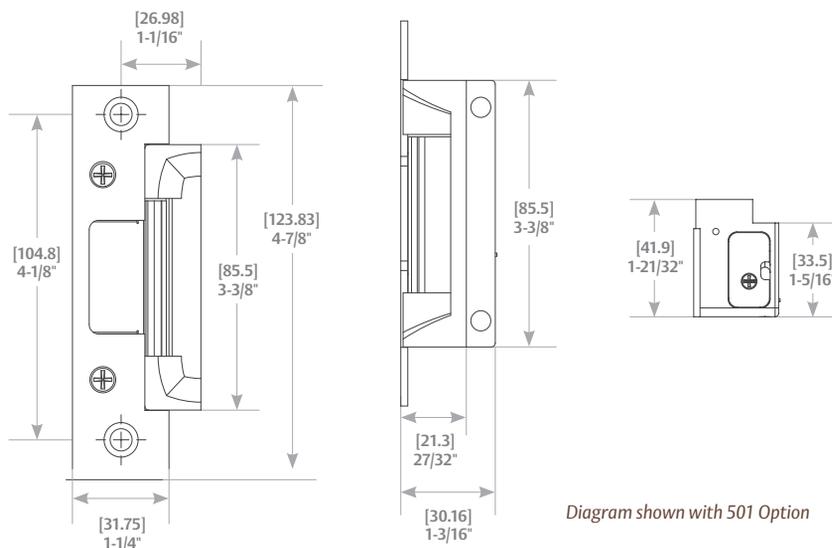


Diagram shown with 501 Option

Standard Features

- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Field selectable fail secure/ fail safe
- Dual voltage 12 or 24 VDC/VAC
- In-frame horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Accommodates 5/8" - 3/4" latchbolt (3/4" with 1/8" door gap)
- Strike body depth 1-3/16"
- Plug-in connector
- Trim enhancer included
- Five-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor
- **LBSM** » Latchbolt strike monitor

Accessories


- 5200-500** » Filler block for retro-fit applications
- 150** » Strike latch guard
- 154-MTK** » Metal template kit
- 2001M** » Plug-in bridge rectifier
- 2004M** » ElectroLynx® adapter
- 2005M3** » SMART Pac® III
- 2006M** » Plug-in buzzer
- 5204-1/2** » 1/2" stackable lip extension
- 5204-1** » 1" stackable lip extension
- 5204-1-1/4** » 1-1/4" stackable lip extension

Finishes

- 630** » Satin stainless steel
- 605** » Bright brass
- 606** » Satin brass
- 612** » Satin bronze
- 613** » Bronze toned
- 629** » Bright stainless steel
- BLK** » Black

*Complete Pacs are only available in the 630 finish

"Press Fit" Stackable Lip Extensions

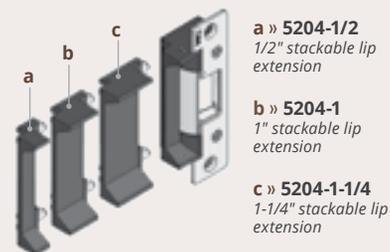

CYLINDRICAL
LOCKSETS



SPECIALTY
LOCKSETS



FIELD SELECTABLE
(12 OR 24VDC)



FIELD SELECTABLE
(FAIL SECURE/
FAIL SAFE)



GRADE 1



UL 1034
BURGLARY
LISTED

hes
ASSA ABLOY

5000/5200 Series Faceplate Options



Operation: After releasing the latchbolt, the keeper returns to the locked position

 <p>4-7/8" x 1-1/4"</p> <p>Square corners and flat faceplate</p>	<p>501 Option</p> <p>For use with: Cylindrical locksets in ANSI metal jambs</p> <p>» ANSI/BHMA Numbers: E09321, E09322, E09323</p>	
 <p>4-7/8" x 1-1/4"</p> <p>Radius corners and flat faceplate</p>	<p>501A Option</p> <p>For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.</p> <p>» ANSI/BHMA Numbers: E09321, E09322, E09323</p>	 
 <p>7-15/16" x 1-7/16"</p> <p>Radius corners and flat faceplate</p>	<p>502 Option</p> <p>For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.</p> <p>» ANSI/BHMA Numbers: E09321, E09322, E09323</p>	 
 <p>6-7/8" x 1-1/4"</p> <p>Radius corners and flat faceplate</p>	<p>503 Option</p> <p>For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.</p> <p>» ANSI/BHMA Numbers: E09321, E09322, E09323</p>	 
 <p>10" x 1-3/8"</p> <p>Radius corners and flat faceplate</p>	<p>504 Option</p> <p>For use with: Cylindrical locksets. Four-point mounting for wood installations</p> <p>» ANSI/BHMA Numbers: E09321, E09322, E09323</p>	