




The 7000 Series is also available in a **Complete One Box Solution**

7000 Series

The **dual, pre-load solution** for cylindrical latch bolts and rim exit devices

Offers two solutions to address pre-loaded doors. The in-frame adjustable feature allows the installer to easily adjust the electric strike opening to accommodate the horizontal position of the latchbolt after installation. The pre-load release function allows the electric strike to operate smoothly throughout the year under varying loads on the door caused by air-conditioning pressure, changes in the weather, warped doors or doors with weather stripping that often bind standard electric strikes. This unit accommodates cylindrical latchbolts up to 5/8" throw and rim exit latchbolts up to 3/4" throw.

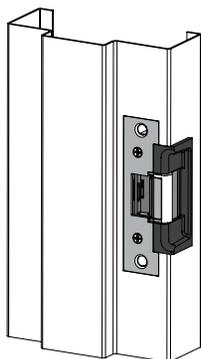

Specifications

- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI BHMA A156.31, Grade 1 (791 and 792 options)
- ANSI/BHMA A156.31, Grade 2 (783S, 786S, and 789S options)
- MEA New York City accepted
- RoHS compliant

Frame Application

- Metal
- Wood

Electrical (continuous duty)

- .45 Amps @ 12VDC
- .25 Amps @ 24VDC
- PoE friendly

7000 Models

7000

Universal electric strike
Faceplate options ordered separately, see page 32


7000C*

Complete electric strike
Includes the 791 and 792 faceplates in the box



Model 7000C includes a 791 and a 792 faceplate in the box

*Complete Pac is for cylindrical latchbolt only

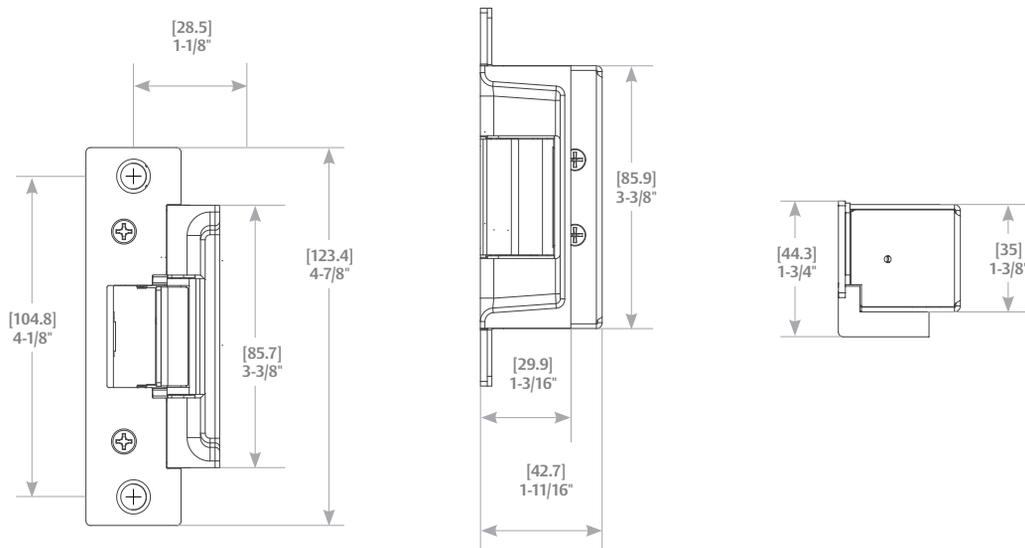

Standard Features

- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs. (791 and 792 options)
- Dynamic strength 70 ft-lbs. (791 and 792 options)
- Static strength 1,000 lbs. (783S, 786S, and 789S options)
- Dynamic strength 50 ft-lbs. (783S, 786S, and 789S options)
- Endurance 500,000 cycles
- Field selectable fail secure/ fail safe
- Accommodates pre-load (up to 15lbs: fail secure only)
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Strike body depth 1-11/16"
- Plug-in connector
- Trim enhancer (791 and 792 options)
- Pocket adapter (786S and 789S options)
- Three-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor

Accessories

- **SMB** » Surface mounting box (783S and 789S options)
- **7000-104** » Lip extension trim adapter
- **7000-105** » Trim enhancer (goof plate)
- **7000-106** » Keeper pocket adapter
- **7000-107** » Full keeper shim pack
- **7000-108** » 1/8" spacer plate (783S and 789S options, black finish only)
- **7000-110** » Replacement strike plate (791 and 792 option)
- **150** » Strike latch guard
- **154-MTK** » Metal template kit
- **2001M** » Plug-in bridge rectifier
- **2004M** » ElectroLynx® adapter
- **2005M3** » SMART Pac® III
- **2006M** » Plug-in buzzer

Finishes

(791 and 792 options)

- **630** » Satin stainless steel
- **605** » Bright brass
- **606** » Satin brass
- **612** » Satin bronze
- **613C** » Brown nylon powder coated
- **629** » Bright stainless steel
- **BLK** » Black

*Complete Pacs are only available in the 630 finish

Finishes

(783S, 786S and 789S options)

- **613C** » Brown nylon powder coated
- **626** » Brushed chrome



CYLINDRICAL
LOCKSETS



RIM EXIT
DEVICES



FIELD SELECTABLE
(FAIL SECURE/
FAIL SAFE)



UL 1034
BURGLARY
LISTED



7000 Series Faceplate Options



Operation: After releasing the latchbolt, the keeper returns to the locked position

 <p>4-7/8" x 1-1/4"</p>	<p>791 Option For use with: Cylindrical locksets up to 5/8" throw » ANSI/BHMA Numbers: E09321, E09322, E09323</p>	  <p>GRADE 1</p>
 <p>7-15/16" x 1-7/16"</p>	<p>792 Option For use with: Cylindrical locksets up to 5/8" throw » ANSI/BHMA Numbers: E09321, E09322, E09323</p>	  <p>GRADE 1</p>



Operation: After releasing pullman latch, the keeper returns to the locked position

 <p>9" x 1-3/4" x 11/16"</p>	<p>783S Option For use with: Rim exit devices in metal jambs with up to a 3/4" pullman latch Compatible locksets: American Device, Arrow, Dor-O-Matic, Monarch, Precision, Sargent, Von Duprin, Yale » ANSI/BHMA Numbers: E09311, E09312, E09313</p>	  <p>GRADE 2</p>
 <p>6-1/2" x 1-3/4" x 1/2"</p>	<p>786S Option For use with: Rim exit devices in aluminum jambs and surface mounted vertical rod exit devices with up to a 3/4" pullman latch. Includes keeper pocket adapter. Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale » ANSI/BHMA Numbers: E09311, E09312, E09313</p>	  <p>GRADE 2</p>
 <p>9" x 1-3/4" x 1/2"</p>	<p>789S Option For use with: Rim exit devices in aluminum jambs with up to a 3/4" pullman latch. Includes keeper pocket adapter. Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale » ANSI/BHMA Numbers: E09311, E09312, E09313</p>	  <p>GRADE 2</p>