PD SERIES HOSPITAL LOCKSETS

CYLINDRICAL & MORTISE PUSH/PULL PADDLESETS CYLINDRICAL ANSI 156.2 GRADE 1 & MORTISE ANSI 156.13 GRADE 1


PD Series Hospital Locksets -


MARKS # 1 PD FUNCTION ANSI # FINISH GROUPS

Our unique cylindrical and mortise hospital push/pull paddlesets feature universal assemblies where you can choose to install handles to point two-up or two-down or one-up and one-down. No handing needed. Marks USA design innovation also produced an improved short angle design meaning easier hands free push/pull for the user. Great retrofit, superior for new construction!

MARKS # I	PD FUNCTION	ANSI #	I IIIIOI	I GROUPS
KEYLESS	IDACCACE	F75	32D	
N	PASSAGE F75			
MARKS # 5 & 55 PD	FUNCTIO		ANSI#	FINISH GROUPS
KEYED SING	GLE CYLINDER, NO DEA	DBOLT		
D	OFFICE VEST.			
DW	VESTIBULE			
E	OFFICE		F04	
EW	STOREROOM		F07	
J	CLASSROOM		F05	
JM, JR	HOSPITAL		F06	
GL	INSTITUTIONAL PRIVAC		F26	
EL	ELECTRICALLY LOCKE			
EU	ELECTRICALLY UNLOC			
KEYED SING	GLE CYLINDER, WITH DE	ADBOLT		,
A	ENTRANCE		F08, F10	
В	ENTRANCE		F21	
F	DORMITORY		F12	
FS	DORMITORY			
FW	DORMITORY		F13	
FD	APARTMENT		F20	
H	HOTEL		F15	
LH	SPECIAL PRIVACY			
	IBLE CYLINDER, NO DEA	ADBOLT		
G	APARTMENT		F09	32D
GC	INTRUDER LATCHBOLT		F32	
GG	CLASSROOM SECURIT			
GR	CLASSROOM SECURIT	Y W/HOLDBACK	F00	
WW	INSTITUTIONAL		F30	
	IBLE CYLINDER, WITH D	EADBOLT		,
AC	ENTRANCE		F35	
C	STOREROOM		F14	
FC	INTRUDER DEADBOLT		F34	
FA FX	DORMITORY		F11	
	DORMITORY		F33	
KEYLESS	IDACCACE		E01	
N L	PASSAGE BATHROOM		F01	
L LF	PRIVACY		F02 F19	
			-	
LJ EX	PRIVACY		F22 F31	
	I=		F31	,
DUMMY TRI				
DI	DUMMY TRIM INSIDE			
DO	DUMMY TRIM OUTSIDE			
DT	FULLY DUMMY			





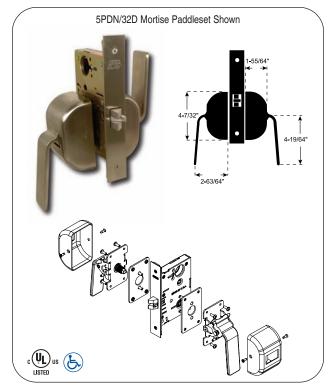

STANDARD FEATURES

Cylindrical:

- Backset: 2-3/4" standard, 2-3/8", 3-3/4" and 5" optional
- Strike: #1136, 2-3/4" "T" strike; #1135 4-7/8" ASA strike optional
- Government standard #161

Mortise:

- Backset: 5 Series 2-3/4", 55 Series 2-1/2"
- Strike: #9035, 4-7/8" ASA curved lip strike

LIFETIME MECHANICAL WARRANTY • FINISHES ARE EXCLUDED FROM THIS WARRANTY

- Door Thickness: 1-3/4", self adjusting for thicker doors
- ANSI-A156.2, Grade 1
- Lead lining and engraving available
- ADA Compliant Non-Handed
- Functional, modern design with variable mounting positions
- Standard 32D finish, consult factory for available finishes
- Easily reversible configuration for push or pull styles