

S200 Series


When it comes to quick, easy egress and dependable security, Schlage S200 Series interconnected locks get the job done. Designed for applications ranging from military housing to multi-family and small hotel/motel buildings, the S200 Series is a lock you can depend on.

Pictured here: S200 Series interconnected lock with Flair lever in 626 satin chrome




S200 Series lever designs

Flair (FLA)

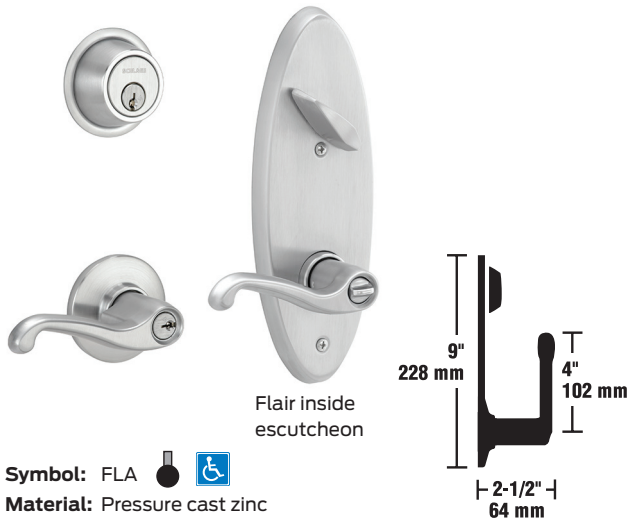


Neptune (NEP)

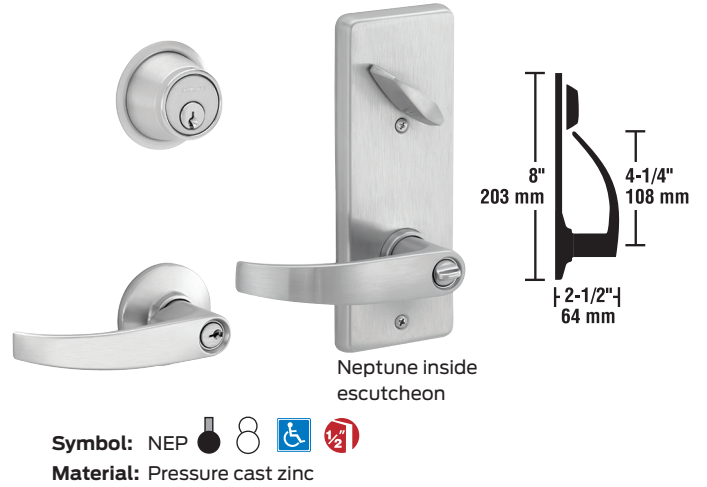

Saturn (SAT)



Jupiter (JUP)

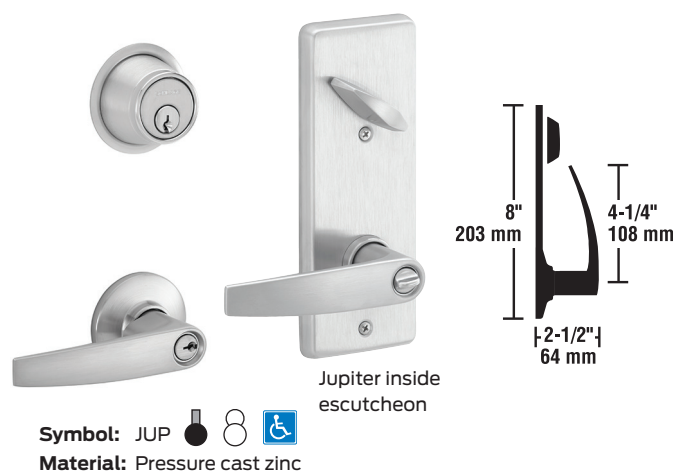

Meteor outside escutcheon







3 1/4" x 8 1/4" x 3/16"


Order separately

Material: Pressure cast zinc

All designs shown in 626 Satin Chrome

-  = Standard cylinder.
-  = FSIC full size interchangeable core option.
-  = Complies with ADA accessibility guidelines.
-  = Meets California code for 1/2" or less return to the door.


Lever finishes

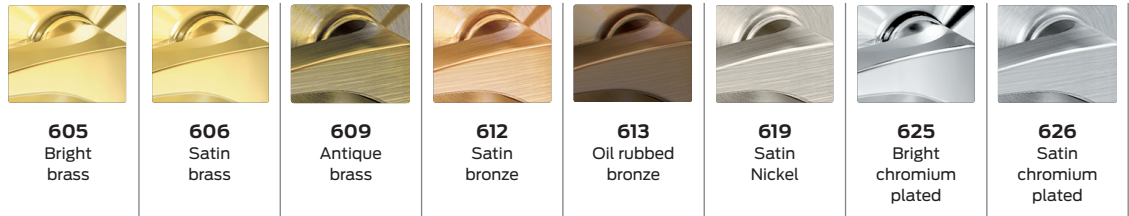

S200 Series locks	605 Bright brass	606 Satin brass	609 Antique brass	612 Satin bronze	613 Oil rubbed bronze	619 Satin Nickel	625 Bright chromium plated	626 Satin chromium plated
Flair	•	•	•	•	•	•	•	•
Jupiter	•	•			•	•	•	•
Neptune	•	•			•	•	•	•
Saturn	•	•	•	•	•	•	•	•
Meteor (36-056)	•	•	•	•	•	•	•	•

Door handing

All Schlage locks are reversible. Hand information is necessary to ensure proper cylinder orientation in keyed functions, and finish of latchbolt and strike for locks that are to be installed on reverse bevel doors. Follow the diagram to correctly determine the hand of the door.

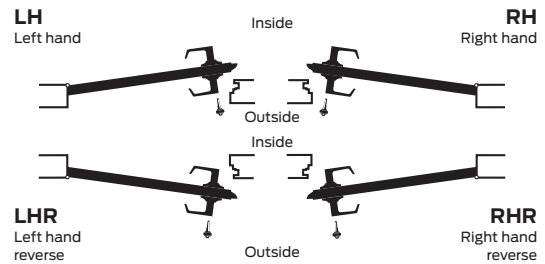

ADA-compliant products






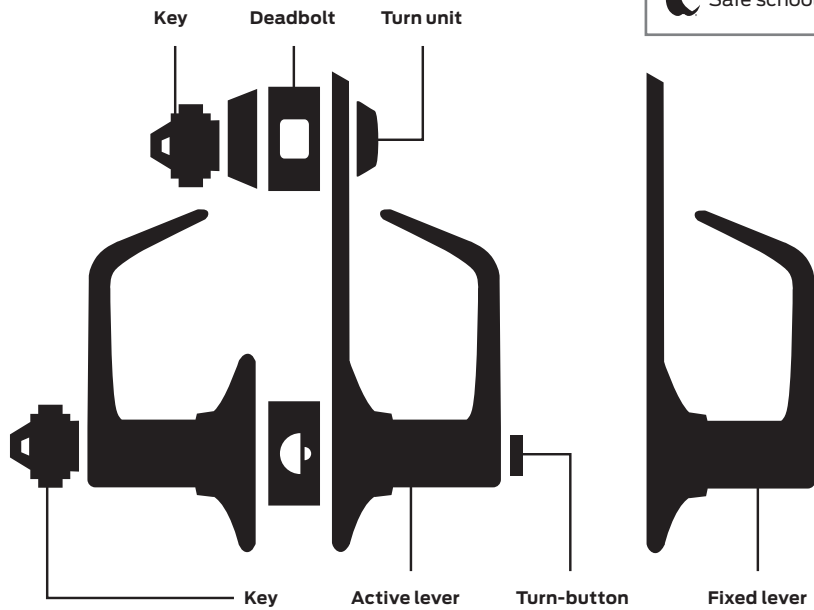
In compliance with the American National Standards Institute (ANSI A117.1) and the Americans with Disabilities Act (ADA), Schlage Lock Company offers a wide selection of locks designed for the needs of the physically challenged. This act is designed to provide protection for people with disabilities.

Product information and specifications contained in this catalog are subject to change without notice. Please consult the factory.

S200 lock functions

ANSI A156.12-1992, Grade 2

	Standard cylinder
	FSIC - full size interchangeable core option
	Safe school locks




Keyed functions

Schlage **S210PD** ANSI **F95**

Entrance, single locking

- Deadbolt operated by key from outside or by turning unit from inside
- Bolt automatically deadlocks when fully thrown
- Latchbolt retracted by lever from either side
- Turn inside lever to simultaneously retract deadbolt and latchbolt for immediate exit



Schlage **S251PD** ANSI **F97**
Entrance, double locking

- Deadbolt operated by key from outside or by turning unit from the inside
- Bolt automatically deadlocks when fully thrown
- Outside lever is unlocked by key from the outside or by turn-button on inside lever
- Turn inside lever to simultaneously released deadbolt and latchbolt for immediate exit
- Latch automatically deadlocks when door is closed

Outside Inside



Schlage **S270PD** ANSI **-**
Classroom lock

- Deadbolt operated by key from outside or by turning unit inside
- Bolt automatically deadlocks when fully thrown
- Outside lever is locked and unlocked by key from the outside
- Turn inside lever to simultaneously retract deadbolt and latchbolt for immediate exit
- Latch automatically deadlocks when door is closed


Outside Inside



Schlage **S280** ANSI **F98**
Storeroom lock

- Deadbolt operated by key from outside or by turning unit from the inside
- Bolt automatically deadlocks when fully thrown
- Outside lever is fixed
- Entrance by key only
- Inside lever simultaneously retracts both latch and deadbolt for immediate exit
- Latch automatically deadlocks when door is closed

Outside Inside



Schlage **S290PD** ANSI **-**
Single dummy trim

- Dummy trim for one side of door
- Used for door pull or as matching inactive trim

Outside/Inside



Standard cylinders

Schlage locks are provided with cylinders precision built to extremely close tolerances and the highest standards of accuracy. Using only solid brass plugs, extruded brass shells, phosphor bronze springs, nickel silver keys and pins, ensures long life and ease of operation.

Conventional cylinders are available in Classic keyways or in the newly patented Everest 29 keyways. Specify keyway to differentiate between Everest 29 and Classic. Example: C (Classic) vs. S123 (Everest 29).

Cylinders for deadbolt (top) - options

- 6-pin conventional (standard)
- Primus XP high security
- Primus XP UL437 Listed high security

Cylinder only available in 606 and 626 finish only. Cylinder with housing available 605, 606, 609, 612, 613, 625, 626.

Everest 29 S123 keyway standard for commercial; C keyway standard for residential.



Cylinder only


Cylinders for keyed levers (bottom)- options

- 6-pin conventional (standard)
- Primus XP high security cylinder
- Primus XP UL437 Listed high security

Available in 606 and 626 finish only.


Everest 29 S123 keyway standard for commercial; C keyway standard for residential.

Sleeve S605-192 included.



New Everest SL cylinder

- A full-size KIL cylinder that pins to the Schlage SFIC keyways
- Uses pick resistant L pins
- SFIC system owners can gain geographic exclusivity with Primus XP
- Achieves about 57,000 more combinations than a 6-pin system



Everest SL cylinder

Interchangeable core 8

Schlage interchangeable core (IC) locksets allow immediate rekeying at the door simply by using the special control key to replace the core in seconds.

IC locksets are available in all designs except Flair.

Full size interchangeable cores can be integrated into any 5 or 6-pin Schlage key with no adverse affects on keying capacity.

To order complete locks with full size cores, change suffix from PD to RD. Example: S251RD. To order locks less core, change suffix to JD. To order with full size construction core, change suffix to TD.

Jupiter
Symbol: JUP
Material: Pressure cast zinc





Neptune
Symbol: NEP
Material: Pressure cast zinc





Saturn
Symbol: SAT
Material: Pressure cast zinc





All designs shown in 626 satin chrome


Cores, and IC cylinders and parts



Full size interchangeable cores - options

- 6-pin conventional (standard)
- Primus high security cylinder

Available in 606 and 626 finish only. Everest 29 S123 keyway standard for commercial; C keyway standard for residential.

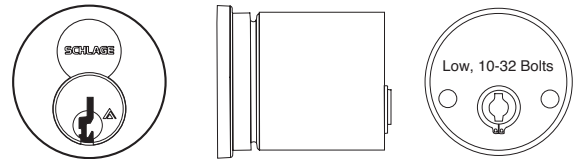

IC cylinders for deadbolt (top) - options

Tailpiece not included.

- Conventional core
- Primus core
- Primus XP core
- Housing less core


Available in 605, 606, 609, 612, 613, 625 and 626 for housing; 606 and 626 for cores and cylinders only.

Everest 29 S123 keyway standard for commercial; C keyway standard for residential.

IC installation tool

This tool is used to install the driver and retainer for full size IC in Schlage knobs and levers. Its other ends are designed to install and remove mortise cylinder housings and test mortise cylinder cam action for both small format and full size interchangeable core cylinders.


M504-413
 (Order separately)



Latches and deadbolts


The standard universal backset deadlatch fits both 2³/₈" (60 mm) and 2³/₄" (70 mm) backsets. They are adjustable for flat or beveled edge doors and have a 1/2" (13 mm) throw. Orders for complete locks are provided with a G506-815 sleeve for 7/8" diameter latches installed in doors with 1" (25 mm) edge bore. Deadbolts have 1" (25 mm) housings and 1" (25 mm) throw. All latches and bolts for the S200 Series have 1¹/₈" x 2¹/₄" square corner fronts.

Note: Failure to use the below-referenced latches and fire cup, which are included with the lockset, will invalidate the UL Listing.



Latch front adapter
A501-878

Used to convert 1" (25 mm) wide squarefront faceplates for 1¹/₈" (29 mm) wide doorpreparations. Furnished in black plastic. Order in multiples of 100.



Sleeve
G506-815


Used on 7/8" (22 mm) diameter latch housings in 1" (25 mm) edge bore. Furnished standard with complete locks.

Deadbolt/deadlatch combinations


Backset	Deadbolt	Deadlatch	Combo pair
2 ³ / ₈ " or 2 ³ / ₄ "	12-288	16-480	16-481
5"	12-633	16-132*	16-484

* 5" backset deadlatch includes A501-878 latch front adapter for 1¹/₈" preparation. Specify finish.

Deadbolt (top)
Fixed backset



Latch (bottom)
Adjustable backset



Door reinforcement

Schlage reinforcing units help prevent the collapse of hollow metal doors when locksets are tightly mounted.



A501-565
1¹/₈" (35 mm) doors

A501-566
1³/₄" (44 mm) doors

Strikes

Deadbolt strikes

Part number	Description	Lip length
10-064	Circular drive-in, thimble strike, 1 ³ / ₁₆ " diameter, 494 (for 626 only)	-
10-092	1/4" radius round corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	1 ¹ / ₈ "
10-094	Square corner, box, 1 ¹ / ₈ " x 2 ³ / ₄ " standard	-
10-095	Square corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	1 ¹ / ₈ "

Deadlatch strikes

Part number	Description	Lip length
10-001	Square corner, T-strike, box, 1 ¹ / ₈ " x 2 ³ / ₄ ", standard	1 ¹ / ₈ "
10-026	Square corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	1 ⁷ / ₃₂ "
10-027	1/4" Radius round corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	
10-058	Circular, adjustable, 1 ³ / ₄ " diameter, 605 and 626 only	


Deadbolt/deadlatch strike combinations

Combo number	Deadbolt strike	Deadlatch strike
10-109	10-094	10-001, 1 ¹ / ₈ " lip
10-251	10-064	10-001, 1 ¹ / ₈ " lip
10-110	10-094	10-026
10-253	10-064	10-026
10-111	10-094	10-027
10-256	10-064	10-027
10-257	10-092	10-027
10-258	10-064	10-058
10-259	10-095	10-026


10-064




10-092




10-094




10-095




10-001



10-026



10-027



10-058



Specifications

Handing:

Not handed, except Flair design.

Door thickness:

1³/₈" to 2" (35 mm-51 mm).

Backset:

2³/₈" (60 mm) Standard, 2³/₄" (70 mm) and 5" (127 mm) available.

Fronts:

Brass or bronze. 1¹/₈" x 2¹/₄" (29 mm x 57 mm) square corner, beveled, for 2³/₄" backset standard.

For availability with specific backsets, see page 29.

Lock chassis:

Steel, zinc dichromate plated for corrosion resistance.

Deadbolt:

1" (25 mm) throw with hardened steel roller, and

1" (25 mm) housings standard.

Latch bolt:

Brass, chrome plated, 1/2" (13 mm) throw, deadlocking.

Exposed trim:

Levers are zinc base, plated to match finish symbols.

Roses, escutcheons, latch faceplates and strikes are wrought brass or bronze.

Strike:

T-strike 1¹/₈" x 2³/₄" (29 mm x 70 mm) x 1¹/₈" (29 mm) lip to center with box standard. Optional strikes, lip lengths and ANSI strike box available.

Cylinder and keys:

Commercial: 6-pin patented Everest 29 S123 keyway standard with two nickel silver keys per lock.

Residential: 6-pin C keyway, keyed 5-pin.

Keying options:

Interchangeable core and Primus high security cylinders. Master keying, grand master keying, and construction keying.

Warranty:

Commercial: Three-year limited.

Certifications

Federal:

Meets FF-H-106C.

California State Reference Code:

(Formerly Title 19, California State Fire Marshal Standard)

All levers with a return to door of 1/2" (64 mm) or less comply.

UL / cUL:

All locks listed for A label single doors, 2' x 8'.

Letter F and UL symbol on latch front indicate listing.

UL437 Listed locking cylinder optional: specify Primus 20-500 Series cylinder.

ADA compliant:

Schlage Lock Company offers a wide selection of locks designed to meet the Americans With Disabilities Act.