


SARGENT®

ASSA ABLOY

3P-8200 Triad™

3 Point Security Mortise Lock

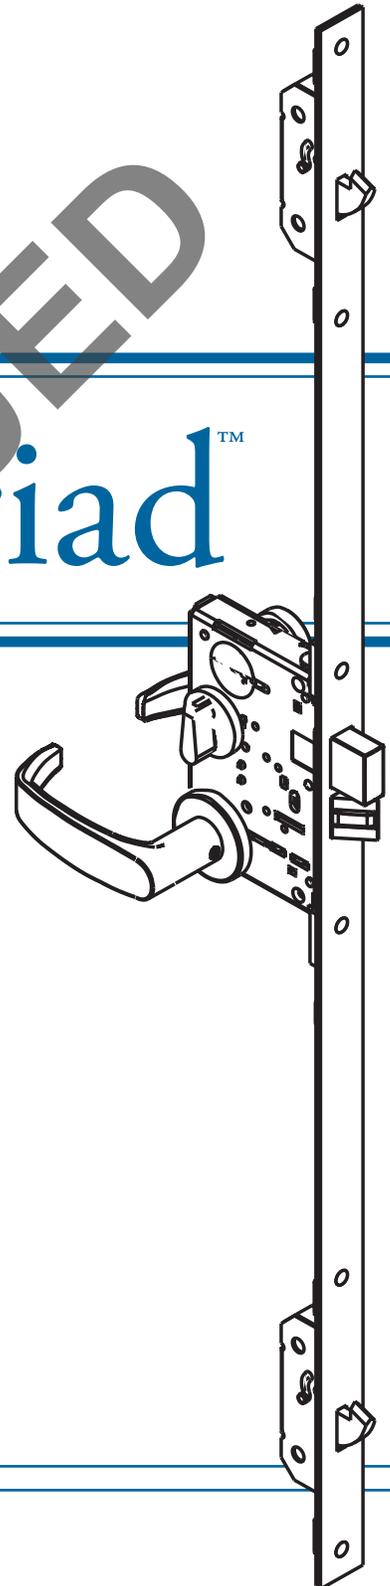

DISCONTINUED

Specifications

Triad™ Mortise Lock



Features, Benefits & Applications 1
 Studio Collection Levers..... 2
 Ordering Gramercy Series Levers 3
 Coastal Series™ Levers, Roses, Escutcheons & Turns 4
 Levers with Rose Designs 5
 Escutcheon Designs 6
 Functions 7
 Mechanical Options..... 8
 Cylinder Options 9-10
 How to Order, Finishes & Architectural Specifications..... 11

Specifications

For Doors	1-3/4" (44mm)
Backset	2-3/4" (70mm)
Front	Wrought brass, bronze and stainless steel 4' 6" (1,372mm) x 1-1/4" (32mm) Adjustable bevel 1/8" (3mm) in 2" (51mm)
Strike	1 each wrought brass, bronze, or stainless steel strike (ANSI standard A115.1 curved lip non-handed) 2 each hookbolt strikes
Hookbolt	Zinc with zinc dichromate finish 1" (25mm) x 3/8" (6mm) size located at 2'-7" (787mm) on center
Levers Designs	A, B, E, F, J, L, P, W, Studio Collection or Coastal Series Lever designs
Trim Designs	Roses: L, O & LN Escutcheons: LE1, LE2, LE3, LE4, LS, LW1, WT Coastal Series trim designs also available
Cylinder	Brass 6 pin LA Keyway standard #41 size (other options available)
Door Prep	ANSI A115.1 Modified per template - see template 4511

Certification Compliance

UL	UL listed to U.S. and Canadian Safety Standard 3 hour rating for single 4' x 10' door
ADA	Meets A117.1 Accessibility Code. Meets BOMA International 4.13.8 Complies with American Disability Act; Consult local authorities

Note: Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

Hardwiring Made Easy™



As part of their promise to provide innovative, fast and effective high security solutions to their customers, ASSA ABLOY Group companies offer ElectroLynx®, a universal quick-connect system that simplifies the electrification of the door opening.

ElectroLynx® is a registered trademark of ASSA ABLOY Inc.



MicroShield®

As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria.

MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.

MicroShield® Coating

- Revolutionary finish coating available on all SARGENT product lines, utilizes a silver-based antimicrobial compound from Agion Technologies
- As an integral part of the finish coating, MicroShield lasts for the life of the hardware
- MicroShield coating permanently suppresses the growth of bacteria, algae, fungus, mold and mildew. It is effective against a broad spectrum of bacteria.
- Non-toxic and completely safe. The Agion antimicrobial compound is EPA and NSF approved and FDA listed for use in medical and food preparation equipment.
- Applications: Anywhere there is need for a clean environment (hospitals, laboratories, schools, medical centers, daycare, food processing etc.)



Agion has achieved:



Agion's silver antimicrobial has been certified for its material content, recyclability, and manufacturing characteristics. Cradle To Cradle Certified^{CM} products meet established standards for human health, environmental health and recyclability.

Cradle To Cradle Certified^{CM} is a certification mark of MBDC.

Copyright © 2004, 2007, 2009, 2011, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.


90650:D 08/01/11

Features, Benefits & Applications

Triad™ Mortise Lock

Features & Benefits

Sargent's TRIAD™ is a Multi-Point Locking Device designed for openings that require multiple latching points within one locking mechanism. The TRIAD™ has a latchbolt, two hookbolts and a deadbolt. It is ideal for tenant spaces or apartment buildings requiring additional or enhanced security.

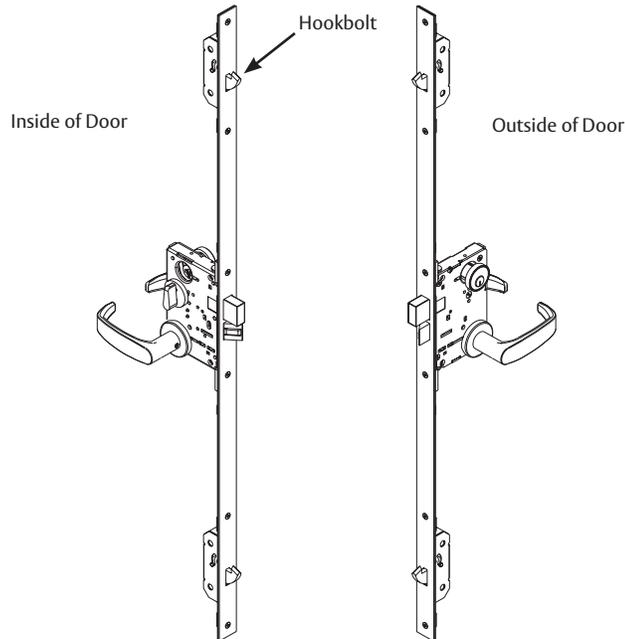

Strength, Durability and Security

- Based on the 8200 Mortise Lock
- Meets ANSI/BHMA A156.13 Operational Grade 1 requirements
- Three-point latching for added security: 2 hookbolts, 1 deadbolt, 1 latchbolt
- The unique Triad hookbolts grip to the strike for added security

Convenience

- Fits modified ANSI door and frame prep - see template 4511
- User friendly packaging
- Easy-to-use instruction sheets
- Single key access

Design

- Multiple trim designs available
- Levers are solid brass, bronze or stainless steel
- All trims are through bolted for added strength and security

Security

- Torx® and spanner screws optional
- Multiple locking functions available
- Security key systems available (Keso F1, Signature, Keso, XC)

Applications

- Designed for single hollow metal door and frames only
- Ideal for remote locations
- Strip malls
- Hospitals
- Manufacturing facilities
- Warehouses
- Apartment buildings

Studio Collection Levers

Triad™ Mortise Lock

Studio^{collection}

The Studio Collection levers, roses and escutcheons are available with the 3P-8200 Triad™ Mortise Lock. This allows for uniformity throughout a facility using SARGENT Access Control Products, 80 & P Series Exits, 8200 & 7900 Mortise locks and the DL Series of tubular locks.

Note: Studio Levers are available with:


- Studio version LE1, TE & CE Escutcheons
- Profile Series Mortise Locks & Exit Devices
- LN, CR, TR, O, C0 & TO Roses
- Harmony Mortise Locks & Exit Devices

"All levers meet ADA compliance for national codes."


Odéon Series




Gramercy Series**

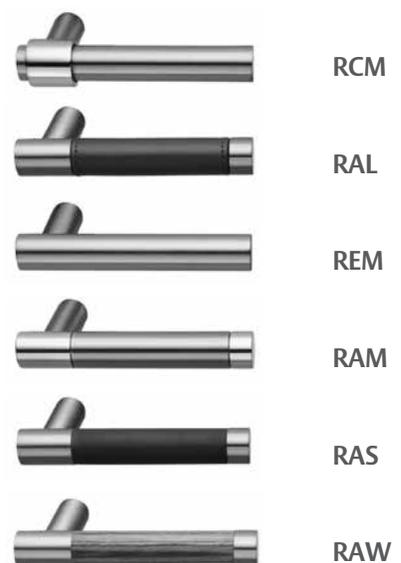

Centro Series

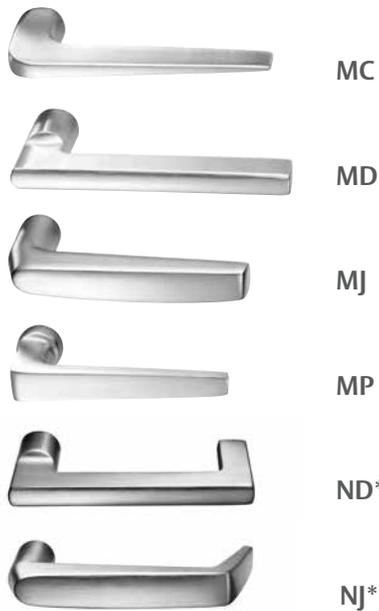


Notting Hill Series

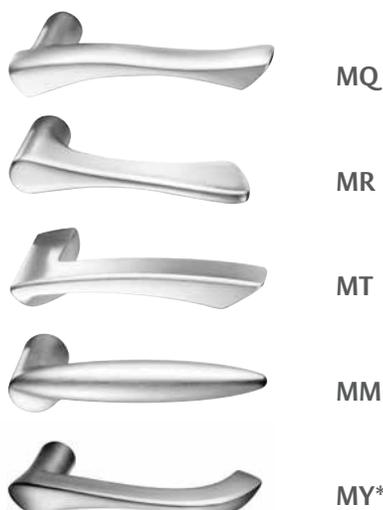

Rialto Series



Aventura Series

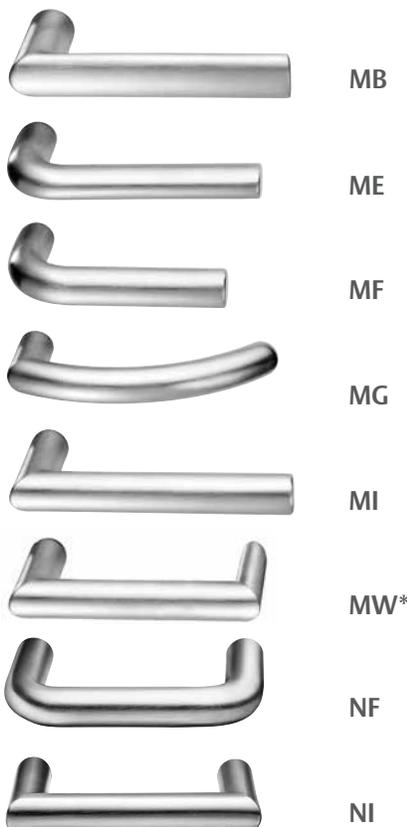

* Lever returns within 1/2" (13mm) of door face


** The Gramercy Levers are customized. Refer to page 3 on how to order.

Ordering Gramercy Series Levers

Triad™ Mortise Lock



Elements of Gramercy Series Levers

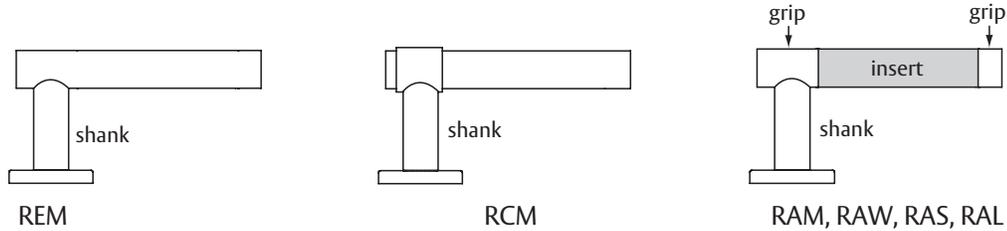

Lever	Part Number	Shank Finish*	Insert	Grip Finish
Plain†	REM	Polish Stainless (629) or Satin Stainless (630)	n/a	Polish Stainless (629) or Satin Stainless (630)
With Raised Band	RCM	Polished Stainless (629)	n/a	Polish Stainless (629) or Satin Stainless (630)
With Metallic Insert	RAM	Polished Stainless (629)	Satin Stainless (630)	Polished Stainless (629)
With Wood Insert†	RAW	Polished Stainless (629) or Satin Stainless (630)	Birch (BH)	Polish Stainless (629) or Satin Stainless (630)
With Santoprene Insert†	RAS	Polished Stainless (629) or Satin Stainless (630)	Black (BK)	Polish Stainless (629) or Satin Stainless (630)
With Leather Insert†	RAL	Polished Stainless (629) or Satin Stainless (630)	Black (BK) or Brown (BN)	Polish Stainless (629) or Satin Stainless (630)

* Rose and escutcheon finish is designated by shank finish selected

† Grip finish must match shank finish

To order Gramercy Series levers with SARGENT products, see the examples below. When specifying finish, use the last two digits of the BHMA standard finish code, i.e. use “29” for polished stainless, BHMA finish 629.

3P-8200 Series Mortise Lock Example

Available with O, CO, TO, CR, LN & TR roses and Studio version LE1, TE & CE Escutcheons

Options	Series	Function	Rose/ Escutcheon	Lever	Shank Finish*	Insert Finish	Grip Finish	Hand
select from page 8-10	3P-82	select from page 7	select from pages 4-6	Leather insert	polished or satin stainless	Black or Brown	polished or satin stainless	RHR, RH, LHR, or LH
10-	3P-82	25	LN	RAL	29	BN	29	RH

Coastal Series™ Levers, Roses, Escutcheons & Turns

Triad™ Mortise Lock

SARGENT®
ASSA ABLOY

Features


- Elegant trim styles that meet your architectural design needs with the highest quality mortise lock construction
- All levers meet ADA compliance for national codes
- Coronado lever meets California's State Fire Marshall Standard
- Coastal Series Levers are available with CE & TE Escutcheon and CR, CO, TR & TO
- All levers – solid cast brass
- Escutcheons – solid brass
- Roses – solid brass
- Finishes available – 03, 04, 09, 10, 10B, 10BL, 14, 15, 20D, 26, 26D

Note: 130 turns and 184 emergency release available in Traditional and Contemporary designs

Roses, Escutcheons & Turns


TE Traditional Escutcheon

- Dual radii edge

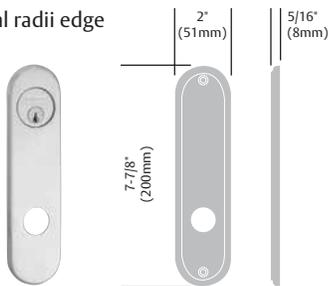


CE Contemporary Escutcheon

- Beveled edge

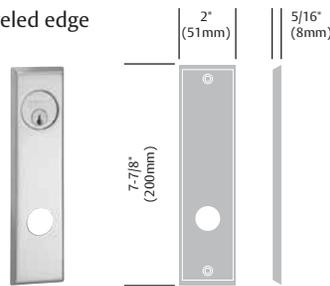


TR Traditional Rose

- Dual radii edge

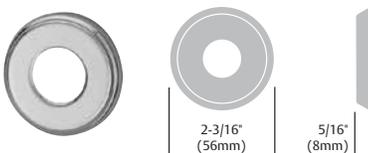

CR Contemporary Rose

- Beveled edge

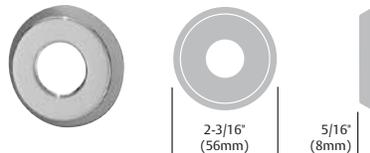

TO Rose

- Dual radii edge




CO Contemporary Rose

- Beveled edge




130KT Traditional Turn

- Dual radii edge

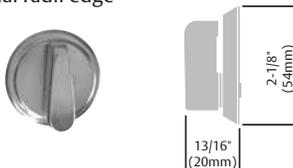


130KC Contemporary Turn

- Beveled edge

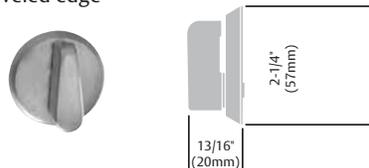

C - Coronado™

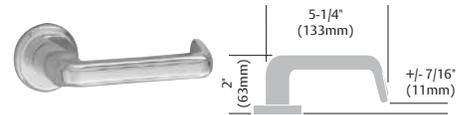

- Shown with traditional rose TR

G - Gulfport™



- Shown with contemporary rose CR
- Must specify hand when ordering

R - Rockport™



- Shown with traditional rose TR

S - Sanibel™



- Shown with contemporary rose CR
- Must specify hand when ordering

Y - Yarmouth™



- Shown with contemporary rose CR
- Must specify hand when ordering

NOTE: All lever height (+/- 1/16") measurements represent total distance from door face

Levers with Rose Designs

Triad™ Mortise Lock


SARGENT®

ASSA ABLOY

- All levers meet ADA guidelines
- Lever designs J, L and P have lever returns within 1/2" (13mm) or less of door face and meet California State Reference Fire Code
- All Standard lever designs on this page are available only with Standard rose and escutcheon designs (does not include Coastal or Studio Collection designs - consult factory)


A Lever Design

- Lever: A-Solid forged or cast
- Must specify hand when ordering

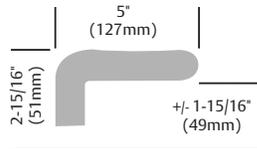


P Lever Design

- Lever: P-Solid forged or cast

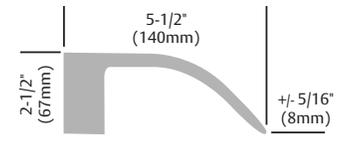


B Lever Design

- Lever: B-Solid forged or cast

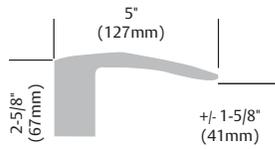


W Lever Design

- Lever: W-Solid bar stock

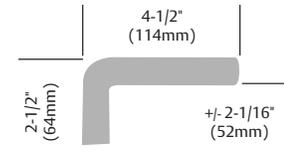


E Lever Design

- Lever: E-Solid forged or cast

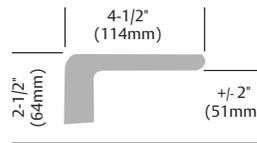


L Rose Design

- Rose: L-Heavy wrought




F Lever Design

- Lever: F-Solid forged or cast

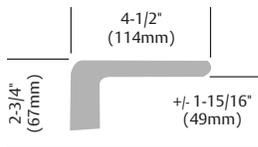


LN Rose Design

- Rose: LN-Heavy wrought




J Lever Design

- Lever: J-Solid cast

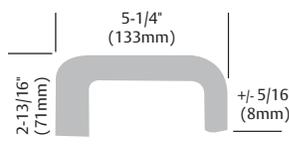

O Rose Design

- Rose: O-Heavy wrought




Note: All lever height (+/- 1/16") measurements represent total distance from door face



- Cylinders will protrude from each escutcheon face on double cylinder functions only


LE1/LE2 Escutcheon Design

- Escutcheon: LE-Cast
- LE1- (2) Exposed screws inside
- LE2- (2) Concealed screws inside

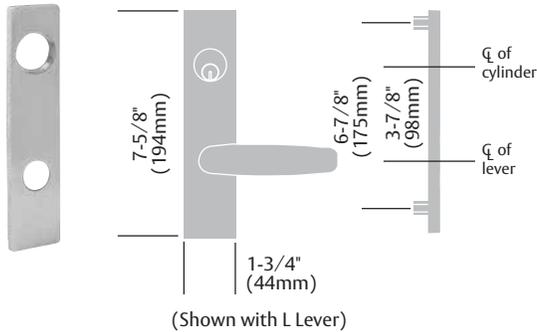


WT Escutcheon Design

- Escutcheon: WT-Heavy wrought
- Surface mounted both inside and outside
- (4) Exposed screws both inside and outside

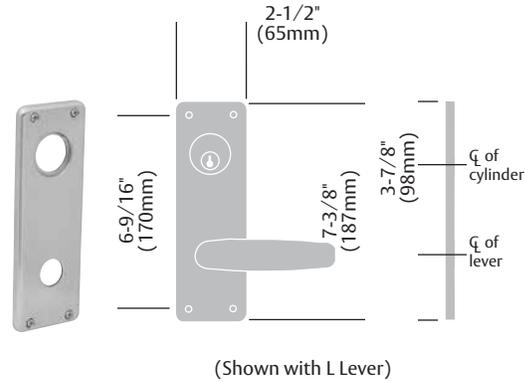


LE3/LE4 Escutcheon Design

- Concealed Cylinder designed Escutcheon, Exposed Barrel Only
- Escutcheon: LE-Cast
- LE3- (2) Exposed screws inside
- LE4- (2) Concealed screws inside
- Not available on double cylinder functions
- Only available with 78-41 cylinder - limited keyway and key system offerings - see cylinders section

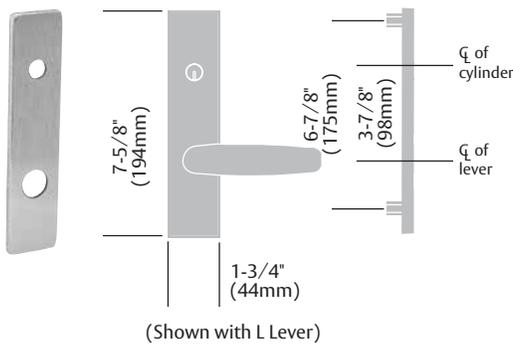


LS Escutcheon Design

- Escutcheon: LS-Forged
- Security Trim. Cylinder is protected by the Escutcheon
- (4) Spanner security screws are exposed on inside trim standard

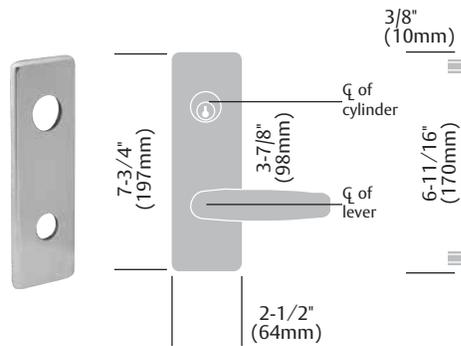

LW1 Escutcheon Design

- Escutcheon: LW1-Wrought
- (2) Exposed screws inside

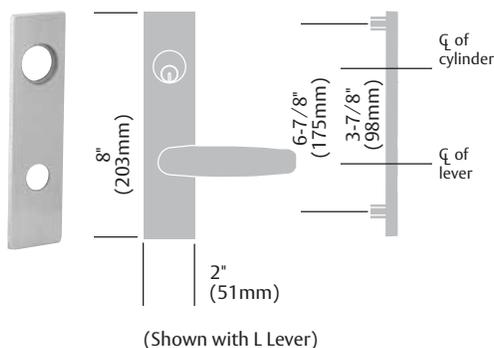


Copyright © 2004, 2007, 2009, 2011, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

90650:D 08/01/11

Single Cylinder with Deadbolt

↗24 Room Door


3P-8224



- Key outside or thumb turn inside retracts and projects deadbolt/hookbolts
- Lever either side retracts latchbolt
- Latchbolt and deadbolt/hookbolts are independent of each other
- ANSI F21

↗27 Closet or Storeroom


3P-8227



- Key outside retracts and projects deadbolt/hookbolts
- Lever from either side retracts latchbolt
- Same as 24 function without thumb turn
- Latchbolt and deadbolt/hookbolts are independent of each other

25 Dormitory or Exit


3P-8225



- Key outside or thumb turn inside retracts and projects deadbolt/hookbolts
- Lever from either side retracts latchbolt, when the deadbolt/hookbolts is in the retracted position
- Lever outside is locked, when the deadbolt is projected
- When deadbolt is projected, lever inside retracts latchbolt and deadbolt/hookbolts simultaneously, unlocking outside lever
- ANSI F13

↗35 Storeroom

3P-8235




- Key outside retracts and projects deadbolt/hookbolts
- Lever outside retracts latchbolt, except when deadbolt/hookbolts is projected
- Inside: no lever or cylinder

Double Cylinder with Deadbolt

↗26 Store Door


3P-8226



- Key from either side retracts and projects deadbolt/hookbolts
- Lever from either side retracts latchbolt
- Latchbolt and deadbolt/hookbolts are independent of each other
- Same as 24 Function with two cylinder and no thumb turn
- ANSI F14

39 Classroom Security Intruder Deadbolt

3P-8239




- Key either side retracts or projects deadbolt/hookbolts to unlock or lock lever/knob outside
- Lever outside retracts latchbolt, except when outside lever is locked by key
- Lever inside retracts both latchbolt and deadbolt/hookbolts simultaneously, and unlocks lever outside
- Same as 25 function with a cylinder inside in place of thumb turn
- ANSI F33

Non-Keyed

66 Privacy Bedroom or Bath


3P-8266



- Lever outside retracts latchbolt except when deadbolt/hookbolts is projected
- Lever inside retracts both latchbolt and deadbolt/hookbolts simultaneously, and unlocks outside lever/knob
- Emergency Release retracts and projects deadbolt/hookbolts
- Thumb turn retracts and projects deadbolt/hookbolts
- ANSI F19

↗68 Privacy Bedroom or Bath

3P-8268



- Lever from either side retracts latchbolt at all times
- Thumb turn inside retracts and projects deadbolt/hookbolts
- Emergency release outside retracts and projects deadbolt/hookbolts
- Latchbolt and deadbolt/hookbolts are independent of each other
- ANSI F02

↗CAUTION: Not recommended for use on any door used for Life Safety egress

Mechanical Options

Triad™ Mortise Lock

SARGENT®


ASSA ABLOY

Mechanical Options:

Categories	How to Specify	Detailed Description
Strike Option	23-	4-7/8" (124mm) ANSI flat lip strike
Security Fasteners	36-	6 Lobe head security screws (Torx® type) (Not available with Studio Levers)
	37-	Spanner head security screw (Not available with Studio Levers)
Tactile Warnings	75-	Tactile Warning - Milled levers or knurled knobs. Inside trim only (Not available with Studio & Coastal Levers & the A Lever)
	76-	Tactile Warning - Milled levers or knurled knobs. Outside trim only (Not available with Studio & Coastal Levers & the A Lever)
	77-	Tactile Warning - Milled levers or knurled knobs. Inside & outside trim (Not available with Studio & Coastal Levers & the A Lever)
	85-	Tactile Warning - Abrasive coating inside trim only
	86-	Tactile Warning - Abrasive coating outside trim only
	87-	Tactile Warning - Abrasive coating inside & outside trim
Finish Protection	CPC-	Clear Powder Coat (Available for 32 & 32D finishes)
	SG-	MicroShield antimicrobial clear powder coat
Larger Turn	LB-	ADA Extra Large Thumbturn: Design based trim (Std-130LB, Traditional-130LT & Contemporary-130LC)
Box Strike	WBS-	Wrought Box Strike


Strikes

Latchbolt and Deadbolt Strike 82-0110 (Standard)

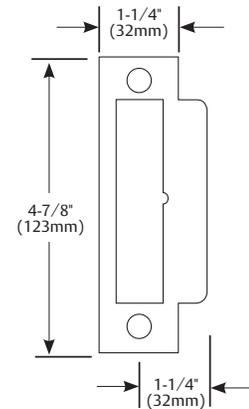

- Strike box - optional
- To order strike separately
Ex: 82-0110 x US3
- Other lip lengths available
 - Wrought box strike optional - specify "WBS-" with order or separately as 77-1141

Hookbolt Strike 82-0018

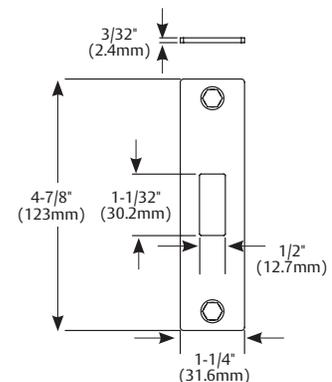

- Hookbolt strikes supplied standard with integral Strike box

Cylinder Options

Triad™ Mortise Lock

Cylinder Options:

Categories	How to Specify	Detailed Description
Conventional Cylinder		SARGENT Conventional Cylinders supplied Standard (Nomenclature not required)
Degree Key System	DG1-	SARGENT Degree Key System Level 1 (Bump resistant with patented keys)
	DG1-21-	Degree Level 1 Construction Master Keying
	DG1-60-	Degree Level 1 Removable Disposable Construction Core
	DG1-63-	Degree Level 1 Removable Core
	DG1-64-	Degree Level 1 Removable Construction Keyed LFIC
	DG1-65-	Degree Level 1 Unassembled/Uncombined Core
	DG1-78-	Degree Level 1 Exposed Plug (For use with LE3/LE4 escutcheons only)
	DG2-	SARGENT Degree Key System Level 2 (Geographically exclusive; bump and pick resistant)
	DG2-21-	Degree Level 2 Construction Master Keying
	DG2-60-	Degree Level 2 Removable Disposable Construction Core
	DG2-63-	Degree Level 2 Removable Core
	DG2-64-	Degree Level 2 Removable Construction Keyed LFIC
	DG2-65-	Degree Level 2 Unassembled/Uncombined Core
	DG2-78-	Degree Level 2 Exposed Plug (For use with LE3/LE4 escutcheons only)
	DG3-	SARGENT Degree Key System Level 3 (Geographically exclusive; UL437 certified; bump and pick resistant)
	DG3-21-	Degree Level 3 Construction Master Keying
	DG3-60-	Degree Level 3 Removable Disposable Construction Core
	Signature Key System	10-
10-21-		SARGENT Signature Construction Key System (Lost Ball)
10UL-		SARGENT Signature UL437 Key System (Not available with other key systems)
Signature Large Format Interchangeable Core (Removable Core)	10-63-	SARGENT Signature LFIC (Removable) Core Cylinder
XC- Key System	11-	XC Key System (Not available with other key systems, unless specified)
	11-21-	XC- Construction Key System (Lost Ball)
XC- Large Format Interchangeable Core (Removable Core)	11-60-	Hardware to accept XC- Permanent LFIC (Removable core), disposable plastic core provided
	11-63-	Hardware provided with XC- LFIC (Removable core) cylinder - (Includes masterkeying, grand masterkeying)
	11-64-	Hardware provided with keyed construction core to accept XC- LFIC (Removable) Permanent core ordered separately
XC- Small Format Interchangeable Cores	11-70-7P-	Hardware to accept XC- SFIC (7-Pin) XC- Permanent cores, disposable plastic core provided
	11-72-7P-	Hardware to accept XC- SFIC (7-Pin Keyed construction core provided) cylinder Permanent core ordered separately
	11-73-7P-	Hardware provided with XC- Small Format 7-Pin Interchangeable core (Includes masterkeying, grand masterkeying)
	11-65-73-7P-	Hardware provided to accept XC- Uncombined 7-Pin SFIC (Permanent) Core - (Packed loose)
Construction Key System	21-	SARGENT Lost Ball Construction keying for Conventional, XC and Signature series (N/A with 63- or 73-)
	22-	SARGENT Construction Split Key System for Conventional cylinders (Existing systems only) (N/A with 10-, 11-, 63- or 73-)

Note: Interchangeable core and removable core cylinders do not meet Security Grade 1 requirements

Note: Cylinder Options on the following pages

Cylinder Options

Triad™ Mortise Lock



Cylinder Options:

Large Format Interchangeable Core (Removable Core)	60-	Hardware to accept SARGENT Permanent LFIC (Removable core), disposable plastic core provided (Permanent cores ordered separately)
	63-	Hardware provided with LFIC (Removable core) cylinder - (Includes masterkeying, grand masterkeying)
	64-	Hardware provided with Keyed construction core to accept LFIC (Removable) permanent core (Ordered separately)
Small Format Interchangeable Cores	70-	Hardware to accept 6- or 7-Pin SFIC Permanent Cores, disposable plastic core provided
	72-	Hardware to accept 6- or 7-Pin SFIC (Keyed construction core provided) cylinder (Permanent core ordered separately)
	73-	Hardware provided with 6-Pin SFIC (Includes masterkeying, grand masterkeying)
	65-73-	Hardware provided to accept Uncombined 6-Pin SFIC (Permanent) core - (Packed loose for field keying)
	65-73-7P-	Hardware provided to accept Uncombined 7-Pin SFIC (Permanent) core - (Packed loose for field keying)
	73-7P-	Hardware provided with Small Format 7-Pin Interchangeable core (Includes masterkeying, grand masterkeying)
Keso & Keso F1	81-	Hardware provided with housings to accept Keso (83) & Keso F1 (F1-83-) removable cores (Permanent cores ordered separately)
	82-	Hardware provided with SARGENT Keso Security Cylinder
	F1-82-	Hardware provided with SARGENT Keso F1 Security Cylinder (Patented)
	83-	Hardware provided with SARGENT Keso Security Removable Core cylinder
	F1-83-	Hardware provided with SARGENT Keso F1 Security Removable Core cylinder (Patented)
	84-	Hardware provided with SARGENT Keso Construction Cores (Permanent cores ordered separately)
Additional Security	BR-	Bump Resistant Cylinder (Available with conventional & conventional XC cylinders only)
Less Cylinder	LC-	Less Cylinder - SARGENT supplies standard collar/blocking ring for 1-1/8" cylinders
Schlage Keyways	SC-	Schlage C keyway cylinder, 0 bitted (size #41 Only-1-1/8")
	SE-	Schlage E keyway cylinder, 0 bitted (size #41 Only-1-1/8")

Note: Interchangeable core and removable core cylinders do not meet Security Grade 1 requirements

Note: For ASSA V-10 Cylinders and information, please contact ASSA

How to Order 3P-8200 Series Mortise Locks

10-	3P-82	25	LN	MJ	15	RHR
Options*	Series	Function	Roses/ Escutcheons	Trim	Finish	Hand
For all available options see pages 8-10	3P-82 Triad Mortise Lock	Page 7 for Details	Pages 4-6	Levers - Pages 2-5	Page 11	RHR
						RH
						LHR
						LH

* Multiple options can be selected

Finishes

Standard Levers	Studio Collection Levers	Coastal Series™ Levers	Description	ANSI/BHMA
03	03	03	Polished brass, clear coated	605
04	04	04	Satin brass, clear coated	606
09	09	09	Polished bronze, clear coated	611
10	10	10	Satin bronze, clear coated	612
10B	10B	10B	Oxidized bronze, oil rubbed	613
10BL	10BL	10BL	Oxidized satin, bronze, clear coated	614
14	14	14	Polished nickel, clear coated	618
15	15	15	Satin nickel, clear coated	619
20D	20D	20D	Statuary dark bronze, clear coated	624
26	26	26	Polished chrome	625
26D	26D	26D	Satin chrome	626
32	32		Polished stainless steel	629
32D	32D		Satin stainless steel	630

Triad™ Suggested Specifications

All locks shall be manufactured by SARGENT Manufacturing Corporation, New Haven, CT. Lock shall meet ANSI/BHMA A156.13 Operational Grade 1 and fit a modified ANSI door and frame prep. Standard lockset furnished for 1-3/4" thick doors with 2-3/4" backset.

Locks required for fire doors, shall be listed by Underwriters Laboratories (U.S. and Canada) for ratings of a A (3 hours) label and less, for single doors up to 4'0" x 10' 0".

All lockbodies shall be manufactured in a single sized case formed of 12-gauge heavy-duty wrought steel minimum with zinc dichromate finish, and closed on all sides and back. Lock shall have a field adjustable bevel. The latchbolt shall be a 1" wide one-piece stainless steel anti-friction design with 3/4" throw. The deadbolt shall be a full 1" throw made of stainless steel. The top and bottom hookbolts shall be zinc, with zinc dichromate finish. Center strike manufactured from wrought brass, bronze, and stainless steel that fits ANSI A115.2 frame prep. Center strike is a non-handed design with a curved lip. Strikes for top and bottom hookbolts to be 3" x 1-1/4" size. To insure proper alignment, all trim shall be through-bolted and fully interchangeable between rose and escutcheon designs.

ADA:

Triad Locks meet ADA requirements with levers and thumbturn. The lock's operation provides additional convenience with no more than a thirty degree rotation of the lever to fully retract the latchbolt and hookbolts.

WARRANTY:

Triad locks shall have a one-year limited warranty.

SARGENT Manufacturing Company
100 Sargent Drive
New Haven, CT 06511 USA
800-727-5477
www.sargentlock.com

ASSA ABLOY is the global
leader in door opening solutions,
dedicated to satisfying
end-user needs for security,
safety and convenience

Founded in the early 1800s, SARGENT[®] is a market leader in locksets, cylinders, door closers, exit devices, electro-mechanical products and access control systems for new construction, renovation, and replacement applications. The company's customer base includes commercial construction, institutional, and industrial markets.

Copyright © 2004, 2007, 2009, 211, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.