


ADJUSTABLE FOR
DOORS $1\frac{3}{8}"$ TO $1\frac{3}{4}"$

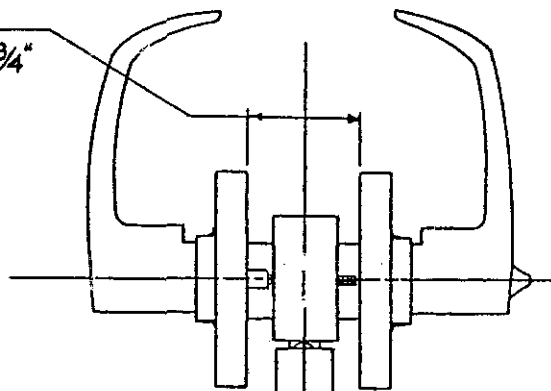

$2\frac{1}{8}"$ DIA.


$2\frac{15}{32}"$

$\frac{5}{32}"$

$38"$ FROM
FINISHED FLOOR
SUGGESTED DETAIL
OF DOOR CUT-OUT

FIXED BEVEL
 $\frac{1}{8}"$ IN $2"$

$1"$ DIA.*
* WITH SUPPLIED SLEEVE,
OTHERWISE $\frac{7}{8}"$ DIA.
CL OF LOCK FRONT
AND STRIKE

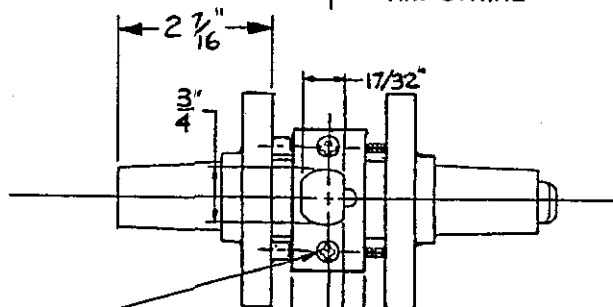


FURNISHED WITH TWO
" $8-32 \times \frac{1}{4}"$ MACHINE SCREWS.

($1"$ WIDE (FOR $2\frac{3}{8}"$ B.S.)

$1\frac{1}{8}"$ WIDE (FOR $2\frac{3}{4}"$ B.S.)
LOCK FRONT
(NOT REQ'D. FOR 7U93/94)

- ⑤ — FOR REGULARLY FURNISHED STRIKE, SEE STRIKE TEMPLATE NO. 4131.
- ④ — DIMENSIONS SHOWN ARE MAXIMUM PART DIMENSIONS.
- ③ — ALL FUNCTIONS COMPLETELY REVERSIBLE FOR RIGHT OR LEFT HAND REGULAR OR REVERSE BEVEL DOORS.
- ② — SAME MORTISING FOR ALL FUNCTIONS EXCEPT 7U93/94 (SEE DOOR PREPARATION ABOVE).
- ① — ALL FUNCTIONS (EXCEPT 7U93/94) WILL FIT CURRENT A.N.S.I. STANDARD A115.2 DOOR PREPARATION FOR $2\frac{3}{4}"$ BACKSET. MODIFY DOOR PREPARATION FOR $2\frac{3}{8}"$ BACKSET LOCKSETS.

BACKSET	LOCKSET
$2\frac{3}{8}"$	20-PREFIX
$2\frac{3}{4}"$	STANDARD

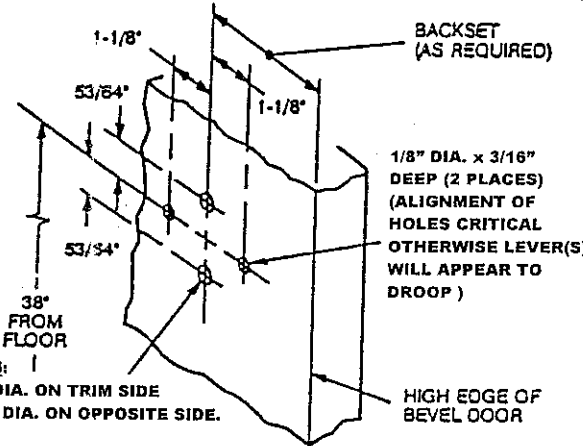

$1\frac{1}{8}"$
 $53/64"$
 $53/64"$
 $1\frac{1}{8}"$
 $1/8"$ DIA. $\times$ $3/16"$ DEEP (2 PLACES)
(ALIGNMENT OF HOLES CRITICAL OTHERWISE LEVER(S) WILL APPEAR TO DROOP)


7U93: $1\frac{1}{8}"$
 $3/8"$ DIA. ON TRIM SIDE
 $3/16"$ DIA. ON OPPOSITE SIDE.

HIGH EDGE OF BEVEL DOOR

7U94:
 $3/8"$ DIA.
(2 HOLES THRU)

DETAIL OF DOOR PREP
FOR DUMMY TRIM

$1\frac{1}{2}"$ BOLT PROJECTION

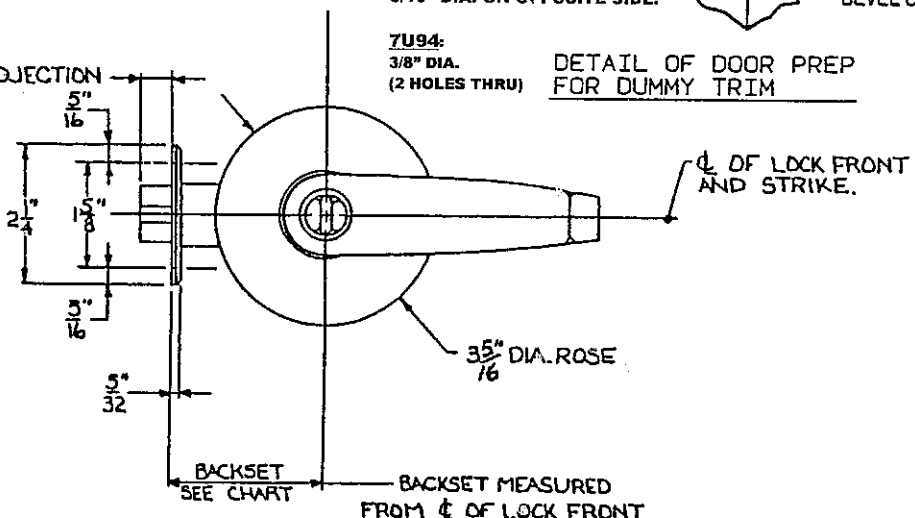

CL OF LOCK FRONT
AND STRIKE.

$3\frac{5}{16}"$ DIA. ROSE

BACKSET
SEE CHART

BACKSET MEASURED
FROM CL OF LOCK FRONT

SARGENT & COMPANY	NEW HAVEN, CONN. 06509
TEMPLATE: 7 LINE BORED LEVER LOCK	RELEASE DATE: 2 JULY 98 TEMPLATE NO. 4481A