




23855075



PIM400-1501-LC User Guide

Installation and operating instructions for Schlage PIM400-1501-LC

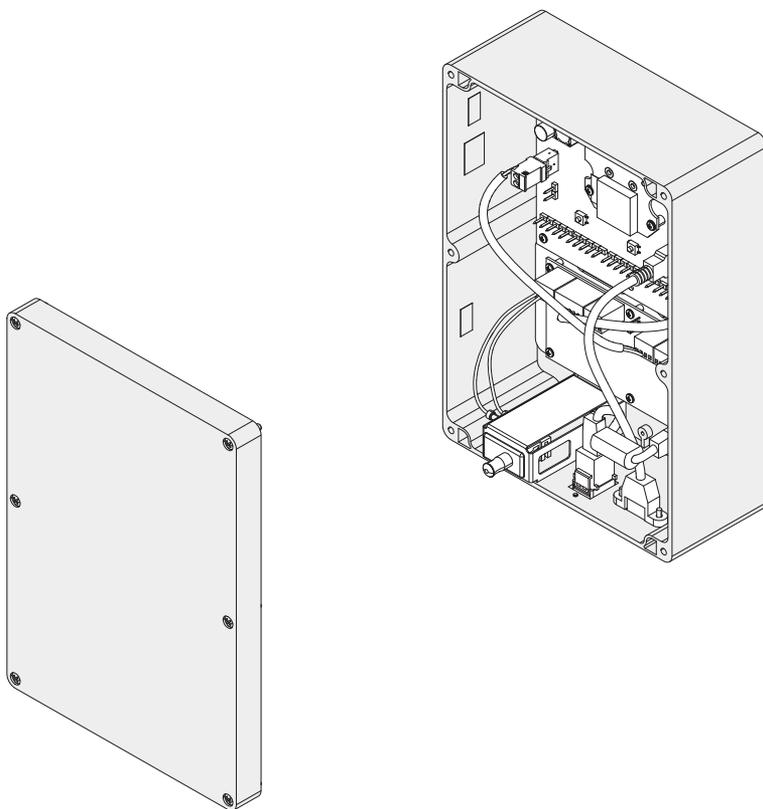

Para el idioma español, navegue hacia www.allegion.com/us
Pour la portion française, veuillez consulter le site www.allegion.com/us

Contents

Overview	3
Getting started	5
Schlage Utility Software (SUS)	5
Link mode	5
Put the PIM400-1501-LC into link mode	5
Install the PIM400-1501-LC	6
Determine the location	6
Pre-installation test	6
Installation	7
Permanently mount the PIM400-1501-LC	7
Wiring connections	8
12 VDC input power	8
PoE Input Power	8
Cable recommendations	8
Network connection	9
Ethernet connection	9
DIP switches	9
Remote antenna (if applicable)	10
Antenna location and safety	10
Antenna grounding	10
Terminate the coax whip at the PIM400-1501-LC	11
Reset to factory defaults	12
Reset the PIM400-485 to factory defaults	12
Reset the LP1501 to factory defaults - bulk erase	12
Memory backup battery	12
PIM400-1501-LC LED reference	13
FCC/IC statements	14

To comply with FCC and Industry Canada RF radiation exposure limits for general population, the antenna(s) used for this transmitter must be installed such that a minimum separation distance of 20 cm is maintained between the radiator (antenna) and all persons at all times and must not be co-located or operating in conjunction with any other antenna or transmitter.

This product is a UL-294 & ULC-S319 Listed Class 1 equipment. This product's UL & ULC compliance would be invalidated through the use of any add-on, expansion, memory or other module that has not yet been evaluated for compatibility for use with this product, in accordance with the requirements of the Standards set forth in UL-294 & ULC-S319.

UL294 Access Control Levels tested to: Destructive Attack - Level 1; Line Security - Level 1; Endurance - Level 4; Standby Power - Level 1.

Overview

The Schlage **PIM400-1501-LC** combines the Schlage PIM400-485 and LP1501 Access Platform into a single product. The Schlage **PIM400-1501-LC** provides the Schlage PIM400-485 in an enclosure designed to receive an LP1501 board.

- ① **Please refer to the PIM400-1501-LC instructions for further information on completing the installation of the LP1501 board (see instruction sheet number P516-781). Once the LP1501 board is installed, the PIM400-1501-LC operates as the PIM400-1501-LC as described in this guide.**
- ① **For UL installations, the PIM400-1501-LC must be used with an LP1501 board that is UL294 listed.**

The PIM400-1501-LC communicates over Ethernet to host software, and by wireless transmission with up to 16 AD-Series Wireless Access Point Modules (WAPMs). WAPMs compatible with the PIM400-1501-LC include the Schlage AD-400 locks, WRI400 and WPR400.

This manual describes the operation and installation of the Schlage PIM400-1501-LC.

- The PIM400-1501-LC is wired to an Ethernet network connection.
- The PIM400-1501-LC is powered externally one of two ways, selected by the power selector jumper, J3:
 - a. Power over Ethernet (PoE), Class 3, fully compliant to IEEE 802.3af, or
 - b. PoE power is to be supplied by a Listed ITE or Access Control System Unit (ALVY), power limited, PoE injector (PSE) providing 44-57 VDC and 15W for maximum output, and PoE+ injector (PSE providing 42.5 - 57 VDC, 25.5W for maximum output.
 - c. 12 VDC power supply connected to TB4-3 (VIN) and TB4-4 (GND). **The 12 VDC power supply must be compatible with all components and must have the capacity to power the PIM400-1501-LC and any other devices attached to the same supply.** (The PIM400-1501-LC requires a power supply capable of sourcing at least 400 mA @ 12 VDC).


For UL installations, PoE powered devices shall not be used.

Power for these devices must be provided by a UL-294 listed, ULC-S318 Listed or ULC-S319 Listed power limited power supply capable of sourcing at least 400 mA at 12 VDC.

Use of the Model CENB1010A1265C02 with the PIM400-1501-LC is permitted for UL-294 Listed applications only.

- Ideal installation location is determined by the location of the WAPM(s).
- The PIM400-1501-LC communicates to the WAPM(s) using Radio Frequency (RF).
- The WAPM is installed at the access point where access will be controlled and/or monitored.
- The PIM400-1501-LC is suitable for indoor use, ambient temperature range 0°C to +66°C (+32°F to +151°F).
- SRAM is protected against power outage by a rechargeable battery.
- Please refer to the Access Control Panel manufacturer's instructions and documentation for information on operation of the ACP.
- Please refer to Mercury documentation for the latest updates and information on the Mercury product.
- The minimum conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG.

- This product is not intended for outside wiring as covered by Article 800 in the National Electrical Code, NFPA 70.
- Category 5e cabling is the minimum performance category recommended.

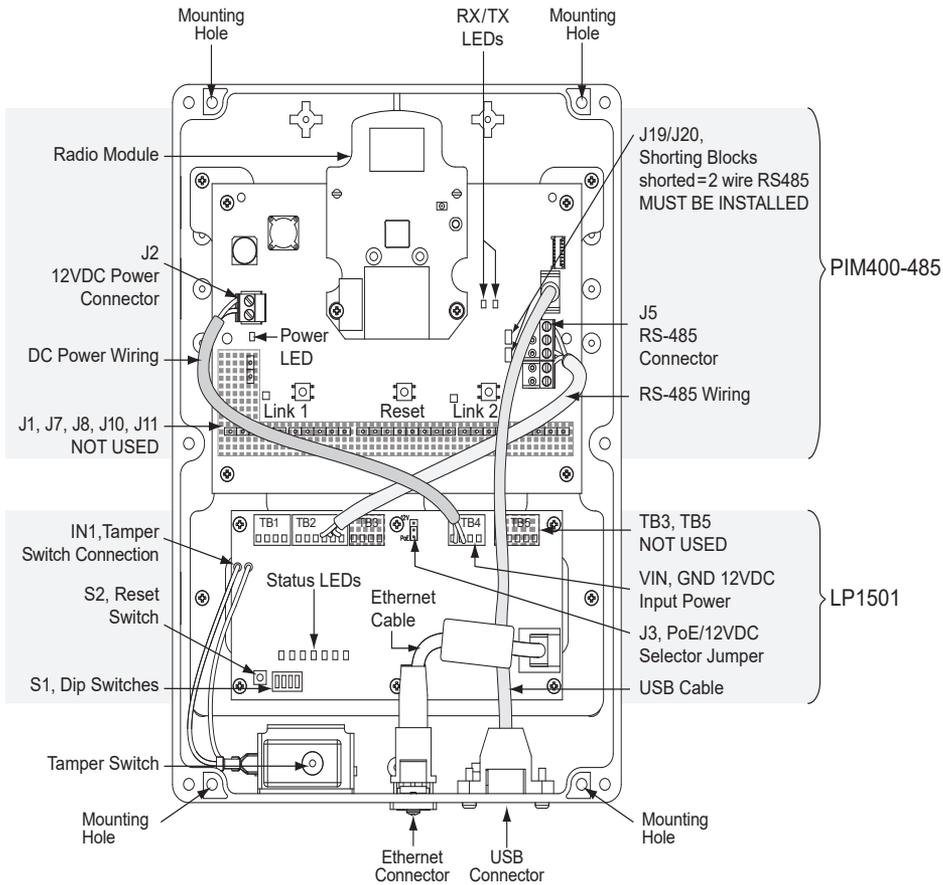

PIM400-1501-LC Printed Circuit Board Assembly

Getting started

The following is an overview of the steps required to set up the PIM400-1501-LC.

1. Install the WAPM (AD-400, WRI400, etc). See the installation guide that came with the WAPM(s) or visit www.allegion.com/us for more information.
2. Make sure the PIM400-1501-LC is located to allow for optimum RF signal transmission. See *Determine the location* on page 7 for more information.
3. Before installing the PIM400-1501-LC, check for proper communication function and linking with WAPM(s). See *Pre-installation test* on page 7 for more information.
4. The PIM400-1501-LC requires an Ethernet network connection in order to connect with host software.
5. The PIM400-1501-LC has been evaluated for UL compliance in indoor applications only.
6. Make sure to follow unique installation procedures if installing on an indoor metallic wall. Refer to *Permanently mount the PIM400-1501-LC* on page 8 for more information.
7. Consult the Schlage Utility Software (SUS) user guide for information about configuring the PIM400-1501-LC and the WAPM(s).
8. Familiarize yourself with the information contained in this user guide.

Save this user guide for future reference.

Schlage Utility Software (SUS)

- The SUS is used for programming and setup only.
 - The SUS is used to configure and link WAPMs to the PIM400-1501-LC.
- ① **The PIM400-1501-LC will report as a PIM400-485-RSI on the SUS.**
- ① **When upgrading the PIM400-485 firmware, make sure to upgrade with PIM400-485-RSI firmware.**
- ① **When the SUS is connected to the PIM400-1501-LC, RS485 communication between the PIM400-485 and LP1501 is interrupted. The PIM400-1501-LC is not controlling door access at this time.**

For information about using the SUS, see the Schlage Utility Software user guide.

Link mode

Put the PIM400-1501-LC into link mode

To initiate linking, place the PIM400-1501-LC in link mode first, then place the desired WAPM in link mode.

1. Place the PIM400-1501-LC into link mode. Refer to the SUS user guide for detailed Link instructions.
 2. Place the desired WAPM into link mode. Refer to instructions in the “Linking” section of the user guide for the WAPM.
- ① *Note: When utilizing the SUS application to initiate link mode, the PIM400-1501-LC must first be coupled to the SUS. To couple with the device, the lid must be removed from the PIM400-1501-LC.*

Install the PIM400-1501-LC

Determine the location

The PIM400-1501-LC communicates with WAPM(s) using radio frequency (RF) signals and with host software using an Ethernet network connection. RF signals are diminished by walls, distance, metal objects or barriers. Consider the following when placing the PIM400-1501-LC:

- Mount the PIM400-1501-LC in a location where a live Ethernet network connection will be available.
- Mount the PIM400-1501-LC within 200 horizontal feet of each WAPM. When clear line-of-sight is available, communication may be possible up to 1000 feet.
- Do not mount the WAPM(s) and the PIM400-1501-LC on different floors. The signal may be degraded and functionality could be severely limited.
- Do not mount the PIM400-1501-LC directly onto a metal surface. A separation of at least one inch must be maintained in all directions from any metal.
- Signals will not pass through metal walls or metal mesh in the walls (stucco). Use a remote antenna module (ANT400) located outside the room when necessary.
- Moving vehicles will interrupt signals. Placement distance should be reduced by half when vehicles may temporarily block the signal.
- Mount the PIM400-1501-LC (or the remote antenna, if used) so that the antenna is vertical for optimal communication.

Pre-installation test

Once locations for the PIM400-1501-LC and WAPM(s) are determined, check performance prior to installation.

- ① **If using a remote antenna module, install the antenna as indicated in the optional remote antenna module (ANT400) user guide.**
 1. As close as possible to its exact mounting location, temporarily mount the WAPM to the access control point (i.e. door, gate, elevator).
- ① **A WPR400 may be used as a portable range tester to facilitate properly locating the PIM400-1501-LC.**
 2. Temporarily mount the PIM400-1501-LC in the exact location and orientation it will be mounted.
 3. Power the PIM400-1501-LC with a 12 VDC supply capable of delivering 400 mA or PoE, Class 3, 12.95W, fully compliant to IEEE 802.3af.
- ① **For UL installations, PoE powered devices shall not be used. Power for these devices must be provided by a UL294 listed power limited power supply capable of sourcing at least 400 mA at 12 VDC (example: Schlage models PS902, PS904, PS906).**
 4. Put the PIM400-1501-LC into link mode. The PIM400-1501-LC will stay in link mode for 30 minutes or until linking to a WAPM has taken place. Refer to *Link mode on page 6*.
 5. Go to the WAPM being tested and put the WAPM into link mode. Refer to instructions in the “Linking” section of the user guide for the WAPM.
 6. Verify that linking has occurred, indicated at the WAPM by the green LED flashing and optionally by an internal sounder beeping. The number of green flashes and audible beeps should be the same as the RF channel number to which the PIM400-1501-LC is set.

Installation

1. If linking was successful, install the PIM400-1501-LC. Install and link additional WAPMs.
 2. If linking was unsuccessful, move the PIM400-1501-LC six to ten inches in any convenient direction and repeat steps 4 through 6 of the Pre-Installation Test (see page 7) until all WAPMs link successfully. If linking is still unsuccessful, move the PIM400-1501-LC closer to the WAPM(s) and repeat, or add more PIM400-1501-LC modules.
- ① **If still not linking successfully, RF interference may be the cause. Refer to the SUS user guide for information on changing the RF channel, and/or consider using a remote antenna module (ANT400).**

Permanently mount the PIM400-1501-LC

Follow these steps to permanently mount the PIM400-1501-LC to its desired location.

1. Place the PIM400-1501-LC, cover removed, against the wall in the position where it successfully linked.
 2. Orient the PIM400-1501-LC vertically with the radio board at the top of the enclosure.
 3. Drill four holes, $\frac{9}{32}$ " diameter drill bit, $1\frac{3}{4}$ " deep, located to match the mounting holes as shown on page 3.
 4. If the location does not adequately support the PIM400-1501-LC, wall anchors should be used (not included).
 5. If mounted on a non-metallic surface or where no metal is within 1 inch (25 mm) of the back of the PIM400-1501-LC, attach the PIM400-1501-LC directly to the wall using appropriate #8 mounting hardware.
 6. If mounted on a metallic surface or where metal is within 1 inch (25 mm) of the back of the PIM400-1501-LC, attach the PIM400-1501-LC 1 inch (25 mm) from the wall.
- ① **If a remote antenna is to be used, refer to the optional remote antenna module (ANT400) user guide.**

Wiring connections

- ① **IMPORTANT:** When drilling holes in the PIM400-1501-LC to accommodate the 12 VDC power cable, ensure that the drill bit does not damage any electronics inside the enclosure. Use light drill pressure to prevent the bit from entering the enclosure very far, or use a stop drill bit no longer than ½” (13 mm) to prevent the bit from damaging electronics inside the enclosure.
- ① When using the internal antenna, attention to wire routing is very important. Improper wire routing will reduce the RF range. Wires inside the enclosure should be as short as possible (i.e. do not coil any excess wire inside the enclosure).

12 VDC input power

- If powering the PIM400-1501-LC with 12 VDC, drill a hole in the enclosure to accommodate the 12 VDC cable. DO NOT drill this hole in the top of the enclosure. Holes in the top of the PIM400-1501-LC are for remote antenna installation only. DO NOT run power wiring through the top of the PIM400-1501-LC enclosure. **Keep all wiring away from the radio module.**
- Use cable entry/exit connectors that comply with local electrical codes (i.e. conduit, etc.).
- 12 VDC power is required for UL 294 installations. The 12 VDC power supply must be compatible with all components and must have the capacity to power the PIM400-1501-LC and any other devices attached to the same supply. (The PIM400-1501-LC requires a power supply capable of sourcing at least 400 mA @ 12 VDC).
- Connect the 12 VDC cable to TB4-3 (VIN), TB4-4 (GND).
- Set the PoE/12 VDC power selector jumper (J3) to “12V”.

PoE Input Power

- If powering the PIM400-1501-LC with PoE, there is no need for a hole to be drilled in the PIM400-1501-LC enclosure to accommodate power. Power is delivered through the Ethernet cable.
- Set the PoE/12 VDC power selector jumper (J3) to “PoE”.

Cable recommendations

Application	AWG	Description	Max Distance
12 VDC Power Input	18	2 Conductor	1000 Feet
Ethernet Connection	-	CAT5 or higher	300 Feet

Network connection

Ethernet connection

Connect a live Ethernet connection to the Ethernet port on the PIM400-1501-LC. The green LED on the PCBA Ethernet port will light up when a live network connection is present.

The PIM400-1501-LC is shipped with the factory default network settings shown below.

DIP switches

Refer to the Mercury LP1501 user guide for more information.

Remote antenna (if applicable)

- ① **If the installation requires a remote antenna, refer to the optional remote antenna module (ANT400) user guide for complete instructions and information on the following antenna models.**

Antenna Model	Application
ANT400-REM-CEILING ANT400-REM-HALL	Intended for indoor applications.
ANT400-REM-I/O ANT400-REM-I/O+6dB	Intended for indoor or outdoor applications.

Antenna location and safety

- Locate within 15 cable feet (4.5 meters) of the PIM400-1501-LC.
- Locate for best RF line-of-sight path between the PIM400-1501-LC and WAPM(s).
- Ensure the antenna and WAPM(s) are located on the same floor of a building.
- Outside antenna systems should not be located near overhead power lines or other electric circuits, or where the antenna can fall into such power lines or circuits. Extreme care should be taken to keep the antenna from touching any power line or circuit.

WARNING: Antenna contact with electric power lines or close proximity to a high voltage electrical field may cause serious or fatal injury.

Antenna grounding

National Electrical Code (NEC) requires that every antenna installation be properly grounded. Local electrical codes may have additional requirements.


- A grounding block is recommended for all antenna installations. Consult the NEC and local electrical codes, and the local Authority Having Jurisdiction (AHJ) for information on proper grounding of the antenna system.
- A grounding block kit compatible with all of the previously mentioned antenna models is available as a kit (sold separately, part number MGB + MCA5). Be sure to consider the length of the grounding block cable when locating the antenna.

For more information, refer to *Accessories* in the optional remote antenna module (ANT400) user guide.

Terminate the coax whip at the PIM400-1501-LC

① **Only applicable to installations using an optional remote antenna.**

1. Drill a $\frac{5}{8}$ " (16 mm) hole in the top of the PIM400-1501-LC enclosure as shown to accommodate the mounting of the coax whip to be connected to the PIM400-1501-LC radio board.

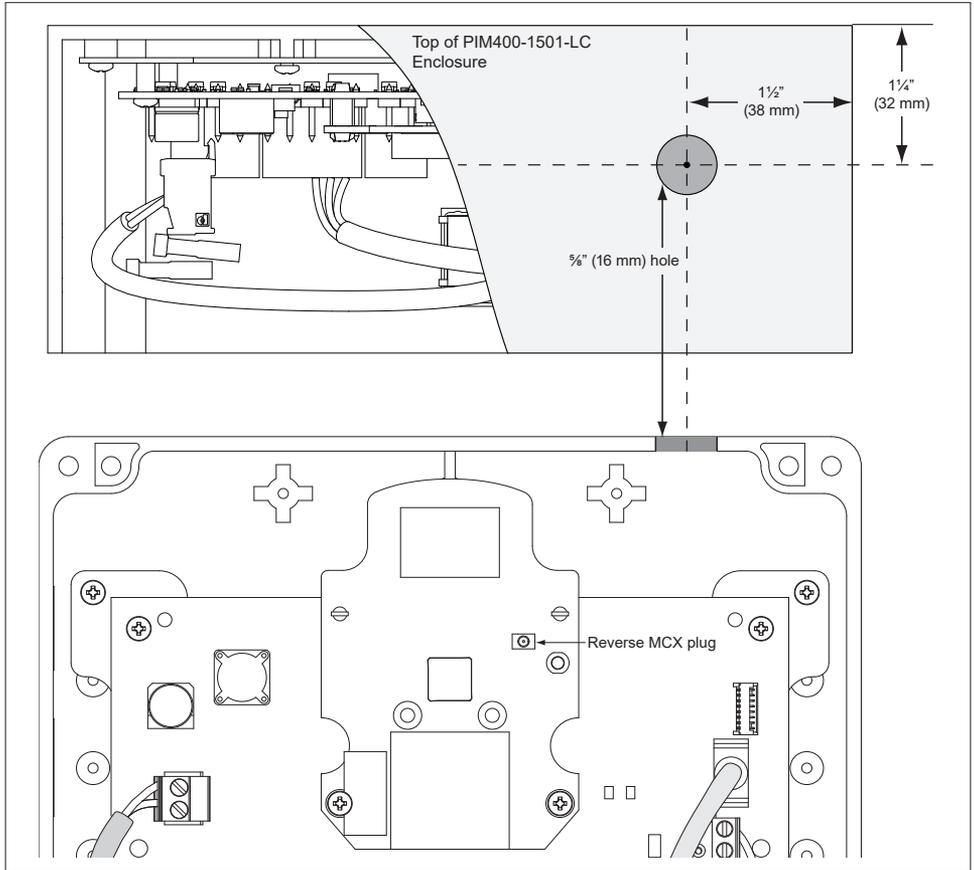

To avoid damage to electronics inside the enclosure when drilling, use light pressure so that the bit does not penetrate very far, or use a stop drill bit no longer than $\frac{1}{2}$ " (13 mm) to stop the bit from damaging electronics inside the enclosure.

2. Refer to the optional remote antenna module (ANT400) user guide for complete coax connection instructions.

Reset to factory defaults



Reset the PIM400-485 to factory defaults

All configuration information will be deleted and the PIM400-485 will be reset to factory defaults!

1. Remove the main cover.
2. Press and hold both link buttons for over 3 seconds.
3. Release both link buttons. The PIM400-485 will blink the red lights beside each link button while configuration reset takes place.
4. The two green lights beside the link buttons will blink 3 times when the reset is complete.
5. Replace the main cover.

Reset the LP1501 to factory defaults - bulk erase

Refer to the Mercury LP1501 user guide for more information.

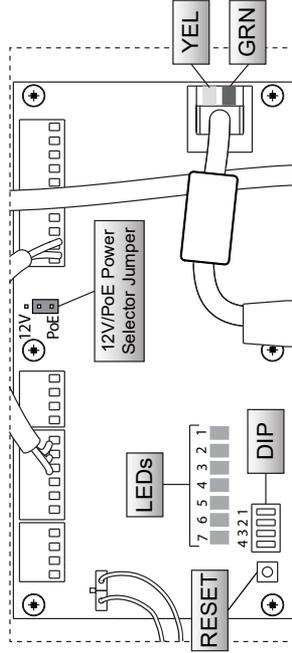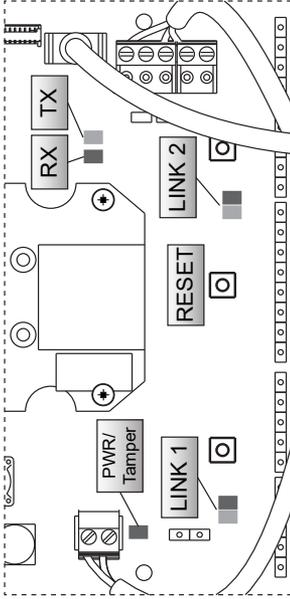

Note: Locations of objects and scale of diagram are approximate.

RESET - COUPLING - BULK ERASE	
Factory Default Reset	Press and hold both LINK1 and LINK2 buttons for three seconds and release.
Coupling	Press and hold LINK1 button, then press LINK2 button three times.
Bulk Erase Configuration Memory	With power OFF, set DIP switches 1 & 2 to ON and 3 & 4 to OFF. Apply power and change switch 1 or 2 to OFF within 10 seconds.

LED	Condition	PIM400-485 PCBA
Power/Tamper (D3)	Solid GREEN	Power applied
Link 1 / Link 2 (LED1 / LED2)	Alternating RED/GREEN flashing	Link mode
	More GREEN flashing than RED	Strong wireless link
	More RED flashing than GREEN	Weak wireless link
	LED1: RED flashing LED2: RED flashing	Communicating with even # WAPM
RX/TX (D4/D5)	LED2: RED flashing	Communicating with odd # WAPM
	RX and TX flashing	RS485 communication with EPI 501 USB communication with HDD
	RX and TX alternating flash	Coupling mode

Refer to the Mercury LP1501 user guide for dip switch and 1501 LED information.

Contact your local authorized dealer or visit www.schlage.com/support

FCC/IC statements

The communication module is a 900 MHz transceiver for electronic locks and non-lock devices. The communication module links the access device to the Access Control Management System, with feedback control to the Access Device via a wireless means. The module contains the embedded firmware implementing the radio physical and data layers. There are 5 antennas approved for use with this module:

Approved antenna list:

The required antenna impedance is 50 ohms.

1. PCB trace antenna with a 5.7dBi maximum gain
2. p/n: 23520587, dual beam antenna with a 3.5dBi gain (ANT400-REM-HALL)
3. p/n: 23530579, multi band directional panel antenna with 8.5dBi gain (ANT400-REM-I/O+dB)
4. p/n: 23530553, dual band quasi-omni panel antenna with 4.5dBi gain (ANT400-REM-I/O)
5. p/n: 23520561, multi band omni antenna with 2dBi gain (ANT400-REM-CEILING)

Antennas having a gain greater than the antenna type approved in the list are strictly prohibited for use with this device. However, antennas of the same type with a gain equal to or less may be used. Examples of this may include:

- a directional panel antenna with a gain equal to or less than 8.5 dBi may be used with this module
- an omni-directional antenna with a gain equal to or less than 2.0 dBi may be used with this module

Specifications of the radio module:

Power output: 20 dBm

Modulation: BPSK-40

Operating frequency: 906 -924 MHz

Note: The intended use of this module is not for the general public. It is generally for industry/commercial use only. This transceiver is to be professionally installed in the end product by Allegion, and not by a third party. The Schlage XPB-COMAD400V3 900 MHz Communication Board Module will not be sold to third parties via retail, general public or mail order. In the case of a repair, the transceiver will be replaced by a professional Installer.

Federal Communication Commission interference statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC/IC caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

To comply with FCC/IC RF exposure limits for general population/uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Industry Canada statements

This Device complies with Industry Canada License-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

This radio transmitter, 8053B-COMAD400V3, has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated.

Approved antenna list:

The required antenna impedance is 50 ohms.

1. PCB trace antenna with a 5.7dBi maximum gain
2. p/n: 23520587, Dual Beam Antenna with a 3.5dBi gain (ANT400-REM-HALL)
3. p/n: 23530579, Multi band Directional Panel antenna with 8.5dBi gain (ANT400-REM-I/O+dB)
4. p/n: 23530553, Dual Band Quasi-Omni Panel Antenna with 4.5dBi gain (ANT400-REM-I/O)
5. p/n: 23520561, Multi band Omni Antenna with 2dBi gain (ANT400-REM-CEILING)

Antennas having a gain greater than the antenna type approved in the list are strictly prohibited for use with this device. However, antennas of the same type with a gain equal to or less may be used. Examples of this may include:

- a directional panel antenna with a gain equal to or less than 8.5 dBi may be used with this module
- an omni-directional antenna with a gain equal to or less than 2.0 dBi may be used with this module.

To comply with IC RF exposure limits for general population/uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

Customer Service

1-877-671-7011 www.allegion.com/us



© Allegion 2023
Printed in U.S.A.
23855075 Rev. 08/23-g