



Popular double door applications

Single door applications




Single mortise lock device




Single rim device


Double door applications



Mortise lock and surface mounted or concealed vertical cable/rod device combination—same direction





Two rim devices with mullion—same direction




Two vertical rods—double egress


Door handing

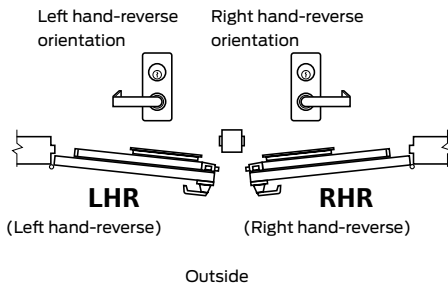

Two surface mounted vertical rod devices—same direction (do not use with overlapping astragal)



Two Fire Exit Hardware vertical cables/rods with auxiliary fire latch-LBR option



Two concealed vertical cables/rods

Trim Operation lever

Standard




Key locks and unlocks lever. e.g., 360L (Classroom)

Night latch



Key unlocks lever, lever is relocked when key is removed. Use NL suffix, e.g., 360LNL (Storeroom)

Blank escutcheon



Lever always active. Use BE suffix, e.g., 360L-BE. (Passage)

Dummy



Lever is rigid for pull operation. Use DT suffix, e.g., 360L-DT.

374T/376T Series thumbturn control



Standard operation, key locks and unlocks thumbturn. Optional operation, key unlocks thumbturn, re-locks when key is removed. This operation is created by changing the cylinder plate included with control. Use 1 1/2" mortise cylinder with a straight cam. Schlage cam reference B502-191. Not available for 3349/3549 devices.

E360 Series controls

The E360 series controls provide the same choice of lever or thumbturn control of the 33A/35A Series exit device. Additionally, these trims have the advantage of being electrically controllable by a remote switching device, an access control system or automatic fire alarm system. The trim operates with a rotary solenoid that controls the locking cam the same way the standard cylinder works. These trims are available as -BE (Blank Escutcheon) function only. These trims are designed for use with the rim, surface vertical and concealed vertical 33A/35A Series exit device. No cylinder override.





Options:





- Available in all device finishes
- 24VDC Solenoid (.5 amp draw)
- Fail Safe (FS) or Fail Secure (FSE)
- Blank Escutcheon (BE) only

To order, specify:

1. FSE or FS
2. Handing - (Lever control) field reversible
3. EPT-2/EPT-10 Power Transfer or Electric Hinge will be used

Standard trim






	EO	DT	NL	NL-OP
				
Product description	33A-EO 35A-EO	33A-DT 35A-DT	33A-NL 35A-NL	33A-NL-OP 35A-NL-OP
Trim description	—	386DT	386NL	388
Base size	—	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " (190x43mm)
Grip size	—	8 ¹ / ₂ " x 4 ⁹ / ₁₆ " (216x110mm)	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—
Projection	—	2 ⁷ / ₁₆ " (62mm)	2 ⁷ / ₁₆ " (62mm)	1" (25mm)
ANSI function	01	02	03	03
Cylinder type	—	—	Rim	Rim
Handing	—	—	Handed	—
Optional trim	—	x360L-DT x550DT x IVES 8190	—	x550DT x IVES 8190 10"






	L	L-BE	T	T-BE
				
Product description	33A-L 35A-L	33A-L-BE 35A-L-BE	33A-T 35A-T	33A-T-BE 35A-T-BE
Trim description	360L	360L-BE	360T	360T-BE
Base size	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)
Grip size	—	—	—	—
Projection	3" (76mm)	3" (76mm)	1 ¹³ / ₁₆ " (46mm)	1 ¹³ / ₁₆ " (46mm)
ANSI function	08 or 09 field selectable	—	11 or 12 field selectable	—
Cylinder type	1 ¹ / ₄ " Mortise	—	1 ¹ / ₄ " Mortise	—
Handing	Handed/Reversible	Handed/Reversible	—	—
Optional trim	—	E360L-BE	—	E360T-BE

Note: 360L & 360T used on wood door require the 33A-WDA cover plate

Notes

Standard trim






	EO	DT	NL	NL-OP	TL
					
	Exit only no outside trim	Dummy trim pull when dogged	Night latch key retracts latchbolt	Night latch key retracts latchbolt optional pull required	Thumbturn key locks & unlocks
Product description	3327A-EO 3527A-EO	3327A-DT 3527A-DT	3327A-NL 3527A-NL	3327A-NL-OP 3527A-NL-OP	3327A-TL 3527A-TL
Trim description	—	386DT	386NL	388	374T x 386
Base size	—	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43mmx22mm)
Grip size	—	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—	—
Projection	—	2 ⁷ / ₁₆ " (62mm)	2 ⁷ / ₁₆ " (62mm)	1" (25mm)	1 ³ / ₁₆ " (46mm)
ANSI function	01	02	03	03	11-12 field selectable
Cylinder type	—	—	Rim	Rim	1 ¹ / ₄ " Mortise
Handing	—	—	Handed	—	—
Optional trim	—	x 360L-DT x 550DT x IVES 8190	—	x 550DT x IVES 8190 10"	x 392-6






	TL-BE	L	L-BE	T	T-BE
					
	Thumbturn-blank escutcheon always operable (no cylinder)	Lever key locks and unlocks	Lever blank escutcheon always operable (no cylinder)	Thumbturn key locks and unlocks	Thumbturn always operable (no cylinder)
Product description	3327A-TL-BE 3527A-TL-BE	3327A-L 3527A-L	3327A-L-BE 3527A-L-BE	3327A-T 3527A-T	3327A-T-BE 3527A-T-BE
Trim description	374T-BE x 386	360L	360L-BE	360T	360T-BE
Base size	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)
Grip size	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—	—	—	—
Projection	1 ³ / ₁₆ " (46mm)	3" (76mm)	3" (76mm)	1 ³ / ₁₆ " (46mm)	1 ³ / ₁₆ " (46mm)
ANSI function	—	08 or 09 field selectable	—	11 or 12 field selectable	—
Cylinder type	—	1 ¹ / ₄ " Mortise	—	1 ¹ / ₄ " Mortise	—
Handing	—	Handed/Reversible	Handed/Reversible	—	—
Optional Trim	x 392-6	—	E360L-BE	—	E360T-BE

Note: 360L & 360T used on wood door require the 33A-WDA cover plate 374T used on wood door require #10-WDA cover plate

Notes

Standard trim





	EO	DT	NL	NL-OP	TL
					
	Exit only no outside trim	Dummy trim pull when dogged	Night latch key retracts latchbolt	Night latch key retracts latchbolt optional pull required	Thumbturn key locks & unlocks
Product description	3347A-EO 3547A-EO	3347A-DT 3547A-DT	3347A-NL 3547A-NL	3347A-NL-OP 3547A-NL-OP	3347A-TL 3547A-TL
Trim description	—	386DT	386NL	388	376T x 386
Base size	—	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ¹¹ / ₁₆ " (190x43mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43mmx22mm)
Grip size	—	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)
Projection	—	2 ⁷ / ₁₆ " (62mm)	2 ⁷ / ₁₆ " (62mm)	1" (25mm)	1 ³ / ₁₆ " (46mm)
ANSI function	01	02	03	03	11-12 field selectable
Cylinder type	—	—	Rim	Rim	1 ¹ / ₄ " Mortise
Handing	—	—	Handed	—	—
Optional trim	—	x 360L-DT x 550DT x IVES 8190	—	x 550DT x IVES 8190 10"	x 392-6





	TL-BE	L	L-BE	T	T-BE
					
	Thumbturn-blank escutcheon always operable (no cylinder)	Lever key locks and unlocks	Lever blank escutcheon always operable (no cylinder)	Thumbturn key locks and unlocks	Thumbturn always operable (no cylinder) (behind C/Case)
Product description	3347A-TL-BE 3547A-TL-BE	3347A-L 3547A-L	3347A-L-BE 3547A-L-BE	3347A-T 3547A-T	33477A-T-BE 35477A-T-BE
Trim description	376T-BE x 386	360L	360L-BE	360T	360T-BE
Base size	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)
Grip size	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—	—	—	—
Projection	2 ⁷ / ₁₆ " (62mm)	3" (76mm)	3" (76mm)	1 ³ / ₁₆ " (46mm)	1 ³ / ₁₆ " (46mm)
ANSI function	—	08 or 09 field selectable	—	11 or 12 field selectable	—
Cylinder type	—	1 ¹ / ₄ " Mortise	—	1 ¹ / ₄ " Mortise	—
Handing	—	Handed/Reversible	Handed/Reversible	—	—
Optional trim	x 392-6	—	E360L-BE	—	E360T-BE

Note: 360L & 360T used on wood door require the 33A-WDA cover plate 374T used on wood door require #10-WDA cover plate

Notes


Standard trim

	EO	DT	NL	NL-OP
				
	Exit only no outside trim	Dummy trim pull when dogged	Night latch key retracts latchbolt	Night latch key retracts latchbolt optional pull required
Product description	3349A-EO 3549A-EO	3349A-DT 3549A-DT	3349A-NL 3549A-NL	3349A-NL-OP 3549A-NL-OP
Trim description	—	386DT	386NL	388
Base size	—	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ¹¹ / ₁₆ " (190x43mm)
Grip size	—	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—
Projection	—	2 ⁷ / ₁₆ " (62mm)	2 ⁷ / ₁₆ " (62mm)	1" (25mm)
ANSI function	01	02	03	03
Cylinder type	—	—	Rim	Rim
Handing	—	—	Handed	—
Optional trim	—	x 360L-DT x 550DT x IVES 8190	—	x 550DT x IVES 8190 10"

	L	L-BE	T	T-BE
				
	Lever key locks and unlocks	Lever blank escutcheon always operable (no cylinder)	Thumbturn key locks and unlocks (behind C/case)	Thumbturn always operable (no cylinder) (behind C/case)
Product description	3349A-L 3549A-L	3349A-L-BE 3549A-L-BE	3349A-T 3549A-T	3349A-T-BE 3549A-T-BE
Trim description	360L	360L-BE	360T	360T-BE
Base size	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)
Grip size	—	—	—	—
Projection	3" (76mm)	3" (76mm)	1 ³ / ₁₆ " (46mm)	1 ³ / ₁₆ " (46mm)
ANSI function	08 or 09 field selectable	—	11 or 12 field selectable	—
Cylinder type	1 ¹ / ₄ " Mortise	—	1 ¹ / ₄ " Mortise	—
Handing	Handed/Reversible	Handed/Reversible	—	—
Optional trim	—	E360L-BE	—	E360T-BE

Nominal door opening height		Top cable part number	Bottom cable part number
*82" - 96"	*6'10" - 8'	47250175	47250178
>96" - 110"	>8'0" - 9' 2"	47250176	47250179
>110" - 120"	>9'2" - 10'	47250177	47250180





*Default door opening height. Specify door opening height if other than the default. For door heights less than 6'10" and greater than 10', contact our Customer Care department to discuss your specific application needs.






Door opening height is distance from bottom of frame header to finished floor.


See table on left for standard offering.

Standard trim

	EO	DT	NL	NL-OP
				
	Exit only no outside trim	Dummy trim pull when dogged	Night latch key retracts latchbolt	Night latch key retracts latchbolt optional pull required
Product description	3350AWDC-EO 3550AWDC-EO	33950AWDC-DT 3550AWDC-DT	3350AWDC-NL 3550AWDC-NL	3350AWDC-NL-OP 3550AWDC-NL-OP
Trim description	—	386DT	386NL	388
Base size	—	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ⁵ / ₈ " (190x41mm)	7 ¹⁵ / ₃₂ " x 1 ¹¹ / ₁₆ " (190x43mm)
Grip size	—	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	8 ¹ / ₂ " x 4 ⁵ / ₁₆ " (216x110mm)	—
Projection	—	2 ⁷ / ₁₆ " (62mm)	2 ⁷ / ₁₆ " (62mm)	1" (25mm)
ANSI function	01	02	03	03
Cylinder type	—	—	Rim	Rim
Handing	—	—	Handed	—
Optional trim	—	x 360L-DT x 550DT x IVES 8190	—	x 550DT x IVES 8190 10"

	L	L-BE	T	T-BE
				
	Lever key locks and unlocks	Lever blank escutcheon always operable (no cylinder)	Thumbturn key locks and unlocks (behind C/case)	Thumbturn always operable (no cylinder) (behind C/case)
Product description	3350AWDC-L 3550AWDC-L	3350AWDCA-L-BE 3550AWDC-L-BE	3350AWDC-T 3550AWDC-T	3350AWDC-T-BE 3550AWDC-T-BE
Trim description	360L	360L-BE	360T	360T-BE
Base size	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)	7 ¹ / ₂ " x 1 ¹¹ / ₁₆ " x 7 ⁷ / ₈ " (190x43x22mm)
Grip size	—	—	—	—
Projection	3" (76mm)	3" (76mm)	1 ³ / ₁₆ " (46mm)	1 ³ / ₁₆ " (46mm)
ANSI function	08 or 09 field selectable	—	11 or 12 field selectable	—
Cylinder type	1 ¹ / ₄ " Mortise	—	1 ¹ / ₄ " Mortise	—
Handing	Handed/Reversible	Handed/Reversible	—	—
Optional trim	—	E360L-BE	—	E360T-BE

Standard door opening height
Feet (Inches)
6'8" - 7' (72" - 84")
7'1" - 8' (85" - 96")
8'1" - 9' (97" - 108")
9'1" - 10' (109" - 120")




Door Opening Height
is measured from finished floor
to frame rabbet on door side.

See table on left for standard offering.

Note: Non-standard sizes available with extended lead time. Consult Customer Care for more information 1-877-671-7011.

33A/35A Optional trim

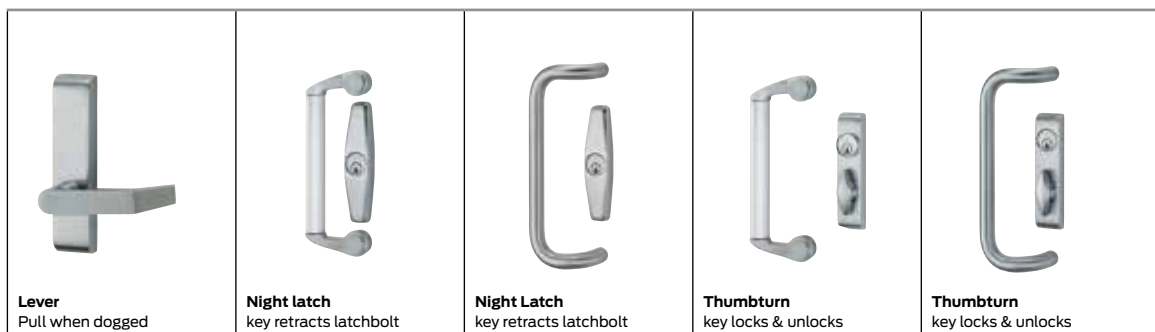

	Lever Pull when dogged	Night latch key retracts latchbolt	Night Latch key retracts latchbolt	Thumbturn key locks & unlocks	Thumbturn key locks & unlocks
Trim description	360L-DT	388 x 550DT	388 x IVES 8190 10"	360T x 550DT	360T x IVES 8190 10"
Base size	7½ x 1⅞" x 7⁄8" (190x43mmx22mm)	7½ x 1⅞" (190x43mm)	7½ x 1⅞" (190x43mm)	7½ x 1⅞" x 7⁄8" (190x43mmx22mm)	7½ x 1⅞" x 7⁄8" (190x43mmx22mm)
Grip size	—	10" center to center	10" center to center	10" center to center	10" center to center
Projection	3" (76mm)	1" (25mm)	1" (25mm)	1⅜" (46mm)	1⅜" (46mm)
ANSI function	02	03	03	11/12 Field selectable	11/12 Field selectable
Cylinder type	—	Rim	Rim	1¼" Mortise	1¼" Mortise
Handing	Handed / Reversible	—	—	—	—

Lever styles



M51
Knurling available



M52
Knurling available



M53



M54



M55



M56



M57 ..



M61
(Handed)



M62 ..
(Handed)



M63
(Handed)



M81
Knurling available



M82



M83



M84



M85
(Handed)

.. Available in Stainless Steel substrate ONLY.

Standard Levers



01



02
Knurling available



03*
Knurling available



05



06*
Default lever
Knurling available



07



12
(Handed)



16
(Omega)



17*
Knurling available



18



ACC
(Accent)
(Handed)



AST
(Asti)
(Handed)



MER
(Merano)
(Handed)



STA
(St. Annes)
(Handed)



LAT*
Latitude



LON*
Longitude

*Available in Stainless Steel - specify SS when ordering