


A	Hinges & pivots
B54	Pulls & plates
C	Flush bolts & coordinators
D	Latches, catches & bolts
E	Stops
F	Exterior hardware
G	Miscellaneous hardware

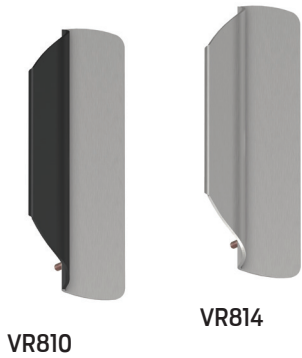

VR810

VR814

VR810-DT with black grip
VR814-DT without black grip

- Closed pull design eliminates a hooking point to be able to forcibly pull a secured door open
- Ligature resistant design
- For use with Falcon XX, 18 or 25 Series exit device
- Non-handed
- Pull operation only

Size

- 11 Gauge (0.120" thick)

Mounting

- For door thickness 1-3/4-2-1/4". 10-24 X 1" and 10-24 X 1-1/2" mounting screw size.
- Can be mounted directly to Falcon XX, 18 and 25 exit devices
- Standard mounting - Welded studs fasten with pan head screws on opposite side of door
- Optional through bolt mounting - bolt through face of trim into device for added security

Product number	Width	Height	Through bolt pattern (4 holes)	Clearance grip to door	Projection
VR810DT	5-1/4"	11"	1-3/4" wide x 7-3/4" high	1-1/2"	1-7/8"

Finishes

- Available in Stainless Steel US32D
- 304 Series Stainless Steel standard, exceeding industry standards for corrosion resistance. Recommended for external applications
- Models are available with or without attractive black plastisol edge grip.
- *Custom finishes are available as engineering special, consult customer service.*