

ACCENTRA KEYMARK®

Protected Keyway Cylinders



TABLE OF CONTENTS

Contents

Overview.....	3
Keys.....	4
System Specifications.....	5
Finishes	6
Cylinder Types.....	7-14
Collars.....	15
Accessories	16
Construction Core Program.....	17

ACCENTRA KeyMark®

ACCENTRA KeyMark® is a protected keyway line of cylinders. Cylinders include mortise, rim, key-in-lever, key-in-knob, auxiliary, and interchangeable core. Interchangeable core is available in both large and small format. All formats can be tied into one master key system!



This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

OVERVIEW

Features	Benefits
<ul style="list-style-type: none"> • Unique ACCENTRA KeyMark® Security Leg® keyway angle 	<ul style="list-style-type: none"> • Will not interchange with KeyMark by Medeco
<ul style="list-style-type: none"> • Protected key control through the Security Leg keyway 	<ul style="list-style-type: none"> • Provides increased resistance against picking and impressioning
<ul style="list-style-type: none"> • Convenient, simple to service 	<ul style="list-style-type: none"> • No extra internal moving parts such as side bars
<ul style="list-style-type: none"> • Available in 6- and 7-pin cylinders 	<ul style="list-style-type: none"> • Can easily retrofit into existing systems
<ul style="list-style-type: none"> • Able to master key SFIC, LFIC and fixed core cylinders to the same keying system 	<ul style="list-style-type: none"> • One key can operate small format IC, as well as large format IC, and fixed core cylinders
<ul style="list-style-type: none"> • Uses common style pins 	<ul style="list-style-type: none"> • No angle tip or interlocking pins which result in loss of keying capacity
<ul style="list-style-type: none"> • Different keying specifications from conventional ACCENTRA systems 	<ul style="list-style-type: none"> • Increased master keying capacity over conventional ACCENTRA keying systems
<ul style="list-style-type: none"> • Unique keyways 	<ul style="list-style-type: none"> • Will not interchange with current ACCENTRA or KeyMark by Medeco key systems, resulting in increased protection for the owner

Protected

ACCENTRA KeyMark® keyways are considered as 'protected' and special procedures are in place to ensure their integrity.

See page 4 for more information.

Applications

Especially recommended for installations requiring protected key control protection. Ideally suited for Educational and Healthcare facilities, Industrial, and Commercial buildings.



Product Specifications

All cylinders to have an angled keyway that accepts a keyblank that is constructed with the same angle. All cylinders shall be available in any of the mortise, rim, cylindrical or interchangeable core types. All cylinder components (excluding tumbler pins and fasteners) shall be constructed of the same material; this material shall be extruded brass. All cylinders shall be capable of utilizing the same key sections and the same key cutting depth and space specification without any loss of keying capacity. Cylinders shall contain standard pins, a portion of which, both bottom and top, shall be spooled for greater resistance against picking.

Certifications

ANSI/BHMA A156.5 Grade 1 
E09211 (Mortise)
E09221 (Rim)
E09231 (Bored Lock Cylinders)

KEYS

Security Leg®


The ACCENTRA KeyMark® keyway has three distinct components: an upper portion or blade, a middle ledge, and a unique, lower angled portion or leg which exits the plug at an angle.

The Security Leg® keyway offers these advantages:

1. Keyway differentiation by angle
2. Increased picking resistance
3. Prevents other manufacturers' or other angle users' keys from entering the cylinder
4. A unique and strong protected key with true key control
5. A key blank of added thickness for extra strength and durability
6. Prevents duplication of keys on standard key machines

Key Warranty

ACCENTRA KeyMark keys are covered by a lifetime warranty against breakage under normal usage conditions. Refer to the current ACCENTRA pricebook for additional warranty information.

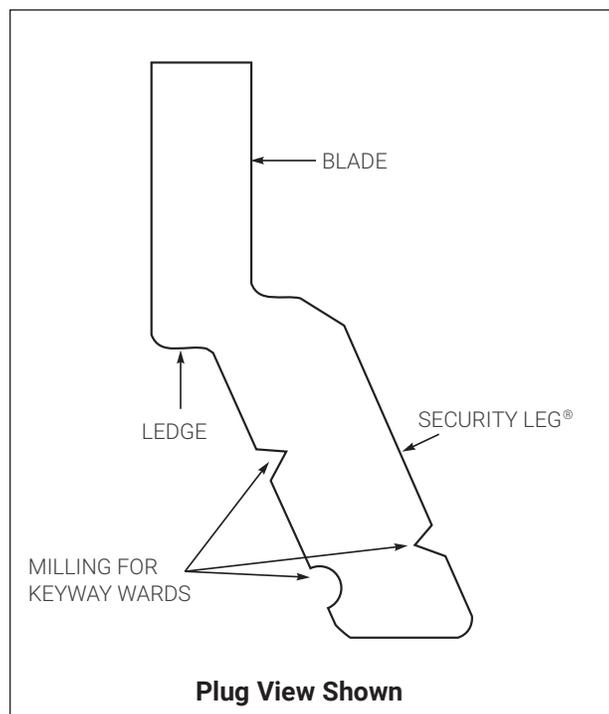

Keys And Key Stamping

KeyBlank Descriptions				
Bow Style	Material	Number	Used For	Keyway
K	N (Nickel Silver)	11	6-pin Master/Change Keys 6-pin SFIC Control Keys	Keyway designations not printed for security reasons. Refer to system bitting list for correct keyway.
		117	7-pin Master/Change Keys 7-pin SFIC Control Keys	
		117C	6-pin LFIC Control Keys	
		118C	7-pin LFIC Control Keys	
		91C	6-pin Schlage® Control Keys	

How to Order Example

Qty.	Description	Keyway
100	KN11	XX

Stamping

All keys will come standard with keybow and stampings as shown. Control keys for LFIC will be furnished with a larger keybow.



Front Side



Back Side

Backside Stamping Options

- Keyset (VKC1) standard – unless otherwise indicated
- System registry number will be stamped on upper-level keys unless otherwise indicated
- Concealed key control (CKC2 only) available on cylinders
- Visual key control (VKC2 and VKC3) not available on cylinders

SYSTEM SPECIFICATIONS

Keyways

Keyway Administration and Assignment

For security purposes, the keyway hierarchies and profiles are not printed. All keyways will be noted on the master key system bitting list.

Key Systems Administration will assign all ACCENTRA KeyMark® keyways. Keyways will be assigned according to facility type, geographic location, and keying system specifications. All keys will direct ship to the end user. All master key systems will be registered with Key Systems Administration.

System Administration & Key Control

Key control will be maintained through compliance with the ACCENTRA Security Policy: for a copy contact Key Systems Administration or visit our website at www.accentra-assaaboy.com. System information and/or systems related product will be forwarded directly to the owner, unless otherwise indicated by the owner's appointed administrator.

Primary Systems Administrators

All ACCENTRA KeyMark master key systems must have a signed Notice of Acceptance for the Facility on file with Key Systems Administration. The Notice of Acceptance designates the primary systems administrator of the facility. Unless otherwise indicated by the primary systems administrator by way of a separate specific letter of authorization, all shipments for ACCENTRA KeyMark product will go to the shipping address as per the Notice of Acceptance.

All keyblanks to be maintained in the possession of the facility must be accounted for. Any defective, incorrectly cut or damaged key blank must be retained in the facility's possession to be returned to ACCENTRA on a quarterly basis.

Keying Specifications

6- or 7-pin with two nickel silver change keys per cylinder. ACCENTRA KeyMark cylinders may be furnished uncombined, master keyed, or grandmaster keyed to a specific facility. Keyed random or 0-bitted cylinders are not available. For uncombined, specify UC. UC are furnished less pins, springs, pin covers and keys.

System Specifications

ACCENTRA KeyMark uses the A2 pinning specification for all types of cylinders. To ensure the security and integrity of each master key system, the following guidelines should be followed:

- Master key systems are independent and cannot be keyed into existing and/or conventional ACCENTRA master key systems.
- Master key systems are not to exceed five levels of keying.
- Proper keying nomenclature must be used for all systems.
- Cross keying is not available.
- Construction master keying is not available. See page 17 for construction core program.
- Selective master keys are not recommended. If required, they must be established at the inception of the keying system.

FINISHES

ACCENTRA KeyMark® cylinders are available in the following ANSI/BHMA finishes.

ANSI/BHMA Code Finish Description			
605 Bright Brass, Clear Coated	606 Satin Brass, Clear Coated	612 Satin Bronze, Clear Coated	613E Dark Oxidized Satin Bronze - equivalent
			
618 Bright Nickel Plated, Clear Coated	619 Satin Nickel Plated, Clear Coated	625 Bright Chrome Plated	626 Satin Chrome Plated
			
BSP Black Suede Powder Coat	WSP White Suede Powder Coat		
			

Plugs are provided in 606, 626 or BSP.

Cylinder Finish	Plug Finish
605, 606, 612, 613E	606
618, 619, 625, 626, WSP	626
BSP	BSP

MORTISE CYLINDERS

Fixed Core



Mortise Fixed Core (FC)

For use with mortise and auxiliary locksets.

Cylinder	Length	Pins	Cam
K100	1-1/8" 1-1/4" 1-1/2" 1-3/4" 2"	6 or 7	KC1 (For cam options, see page 16.)

All cylinders are drilled for 7-pins. Length must be specified.

How To Order Examples

Mortise Cylinder Ordered Separately							
Quantity	Cylinder	Length	Pins	Keyway	Cam	Keyset	Finish
50	K100	1-1/4"	6	XX	KC1	AA1	626

Collar not furnished with cylinder ordered separately.

Mortise Lockset with a ACCENTRA KeyMark® Cylinder									
Quantity	Trim	Lock	Cylinder	Pins	Keyway	Keyset	Hand	Thickness	Finish
50	AUR	8805FL	K100	6	XX	AA1	RHR	1-3/4"	626

Collar - 1765 furnished standard when ordered with lockset.
For Collar applications, see page 15.



**Mortise Lock AUR 8805FL
with K100 Cylinder**

Exceptions: ACCENTRA KeyMark® cylinders are not available for the following functions: 8820, 8827, 8832.

RIM CYLINDERS

Fixed Core

For use with exit devices and auxiliary locking devices.

Cylinder	Length	Pins	Tailpiece
K300	1-1/8"	6 or 7	KT1 Horizontal Break-off *

*For vertical application change orientation of tailpiece.
All cylinders are drilled for 7-pins.



Rim Fixed Core (FC)

How To Order Examples

Rim Cylinder Ordered Separately						
Quantity	Cylinder	Pins	Keyway	Tailpiece	Keyset	Finish
50	K300	6	XX	KT1	AA1	626

Collar not furnished with cylinder ordered separately.

Exit Device with a ACCENTRA KeyMark® Cylinder								
Quantity	Device	Trim	Cylinder	Pins	Keyway	Keyset	Hand	Finish
50	7150	626F	K300	6	XX	AA1	RHR	626

For Collar applications, see page 15.



**Heavy-Duty Exit Device Trim 626F
with K300 Cylinder and KP4 Collar**

KEY-IN-KNOB AND KEY-IN-LEVER CYLINDERS

Fixed Core Component and Interchangeable Core

For use with lever and knob series locksets.



**Key-in-knob (KIK),
Key-in-lever (KIL)
Fixed Core (FC)**

Cylinder	Trim Type	Pins		Tailpiece*
		6	7	
K400	Knob, 5300 [^] , 5400 [^] Series	X	NA	NA
K402	Lever, 4700LN, 5300LN	X	NA	KT2
K402	Lever, 5400LN, 6400LN [^] Series	X		KT2
			X	KT7
K403-46K	Knob, 4600YC	X		17-1803-1006 (1.106")
K403-46L	Corbin Russwin CLX3300 (YC) & SARGENT 10X Line (YC-) series cylindrical locks, mechanical functions, 1-3/8" – 2" doors.	X		17-1803-1006 (1.106")
K403-46LL	Corbin Russwin CLX3300 (YC) & SARGENT 10X Line (YC-) series cylindrical locks, mechanical functions, 2-1/4" doors.	X		17-1803-1008 (1.330")
K403A-46L	Corbin Russwin CLX3300 (YC7) & SARGENT 10X Line (YC-7P-) series cylindrical locks, mechanical functions, 1-3/8" – 2" doors.		X	17-1803-1007 (.950")
K403A-46LL	Corbin Russwin CLX3300 (YC7) & SARGENT 10X Line (YC-7P-) series cylindrical locks, mechanical functions, 2-1/4" doors.		X	17-1803-1009 (1.174")
K403-46E	Corbin Russwin CLX3300 (YC) & SARGENT 10X Line (YC-) series cylindrical locks, electrified functions, 1-3/8" – 2" doors.	X		17-1803-1015 (.945")
K403-46LE	Corbin Russwin CLX3300 (YC) & SARGENT 10X Line (YC-) series cylindrical locks, electrified functions, 2-1/4" doors.	X		17-1803-1017 (1.108")
K403A-46E	Corbin Russwin CLX3300 (YC7) & SARGENT 10x Line (YC-7P-) series cylindrical locks, electrified functions, 1-3/8" – 2" doors.		X	17-1803-1016 (.789")
K403A-46LE	Corbin Russwin CLX3300 (YC7) & SARGENT 10X Line (YC-7P-) series cylindrical locks, electrified functions, 2-1/4" doors.		X	17-1803-1018 (.952")
K403-47L	Lever, 4700LN, 5400LN, 440F	X		17-1803-1012 (1.930")
K403-53L	Lever, NexTouch [®]	X		17-1803-1011 (1.700")
K403-54L	Lever, 4600LN, 4800LN [^] , Corbin Russwin CL3100, SARGENT 11 Line	X		17-1803-1005 (.692")
K403A-54L	Lever, Corbin Russwin CL3100, SARGENT 11 Line		X	17-1803-1007 (.536")
K403-54K	Knob/Lever, 5400CK, Heritage Collection	X		17-1803-1005 (.692")
K404	Knob/Lever, 4300 [^] , 4300LN [^] , 4800LN [^] Series	X	NA	KT3
K490	Lever, Schlage [®] A, D & ND Series	X	NA	KT5

*Length varies by function and application. For tailpiece options, see page 16.
KIK and KIL cylinders available in 606, 626, and BSP finishes only.

How To Order Examples

Component Cylinder Ordered Separately					
Quantity	Cylinder	Pins	Keyway	Keyset	Finish
50	K402	6	XX	AA1	626

Cylindrical Lock with a ACCENTRA KeyMark [®] Fixed Core Cylinder or IC							
Quantity	Trim	Lock	Cylinder	Pins	Keyway	Keyset	Finish
50	AU	5407LN	K402 (Fixed Core) or *K600 (Small Format IC) - see page 11, or *K800 (Large Format IC) - see page 10.	6	XX	AA1	626

How To Order With Construction Temporary Cores (See Page 17 For Construction Core Program)



**Heavy-duty Cylindrical Lock
AU5407LN with K800 Core**

ACCENTRA KeyMark[®] Protected Keyway Cylinders

Cylindrical Lock with a Temporary LFIC						
Quantity	Trim	Lock	Cylinder	Key Code	Hand	Finish
50	AU	5407LN	1210	CT6LL	RHR	626

For permanent core ordered separately, see "Core Only" on page 10.

Cylindrical Lock with a Temporary, Lockable SFIC						
Quantity	Trim	Lock	Cylinder	Key Code	Hand	Finish
50	B-AU	5407LN	K926	CT6SL	RHR	626

For permanent core ordered separately, see "Core Only" on page 11.

INTERCHANGEABLE CORE CYLINDERS

Large Format Mortise

Complete Cylinder	Core	Housing	Length	Pins		Cam
				6	7	
K820	Included	Included	1-1/2"	X		KC1 (For cam options, see page 16.)
			1-11/16"		X	
			1-3/4"	X		
			2"	X	X	
K800	K860	K860	1-1/2"	X	X	
			1-11/16"		X	
			1-3/4"	X		
			2"	X	X	
Schlage® LFIC*	K890			X	NA	

For use with mortise and auxiliary locksets.



Complete Mortise Cylinder (LFIC)

*KeyMark core for Schlage LFIC prep.

Housing Finish	Cylinder/Plug Finish
605, 606, 612, 613E	606
618, 619, 625, 626, WSP	626
BSP	BSP

LFIC Mortise housings supplied in finish specified

How To Order Examples

Mortise Cylinder Ordered Separately								
	Quantity	Cylinder	Length	Pins	Keyway	Cam	Keyset	Finish
Complete Cylinder	50	K820	1-1/2"	6	XX	KC1	AA1	626
Housing Only	50	K860	1-1/2"	6	--	KC1	--	626
Core Only	50	K800	--	6	XX	--	AA1	626

Collar not furnished with cylinder ordered separately.



Large Format Interchangeable Core (LFIC)

Mortise Lockset with a ACCENTRA KeyMark® LFIC Cylinder								
Quantity	Trim	Lock	Cylinder	Pins	Keyset	Hand	Thickness	Finish
50	AUR	8805FL	K820	6	AA1	RHR	1-3/4"	626

Collar - 1765 furnished standard when ordered with lockset. For Collar applications, see page 15.

How To Order With Construction Temporary Cores (See Page 17 For Construction Core Program)

Mortise Lockset with Temporary LFIC							
Quantity	Trim	Lock	Cylinder	Key Code	Hand	Thickness	Finish
50	AUR	8805FL	K825	CT6LL	RHR	1-3/4"	626

For permanent core ordered separately, see "Core Only" above.

Mortise Cylinder Separately with Temporary LFIC					
Quantity	Cylinder	Length	Cam	Key Code	Finish
50	K825	1-1/2"	KC1	CT6LL	626

For permanent core ordered separately, see "Core Only" above.



Mortise Lock AUR 8805FL with K820 Cylinder

INTERCHANGEABLE CORE CYLINDERS

Small Format Mortise

Complete Cylinder	Core	Housing	Length	Pins		Cam
				6	7	
K620	Included	Included	1-1/4"	X		KC1 (For cam options, see page 16.)
			1-3/8"	X	X	
			1-3/4"	X	X	
K630 Tapered*	Included	Included	1-1/4"	X		
			1-3/8"	X	X	
	K600			X	X	
Non-Tapered Mortise Housing		K660	1-1/4"	X		
			1-3/8"	X	X	
			1-3/4"	X	X	
Tapered Mortise Housing		K670	1-1/4"	X		
			1-3/8"	X	X	

For use with mortise and auxiliary locksets.



Complete Mortise Cylinder (SFIC)

*Tapered housings (not illustrated) are designed for narrow stile/backset applications, (storefront doors). Recessed collars are not necessary.

Housing Finish	Cylinder/Plug Finish
605, 606, 612, 613E	606
618, 619, 625, 626, WSP, BSP	626

SFIC Mortise housings supplied in finish specified

How To Order Examples

Mortise Cylinder Ordered Separately								
	Quantity	Cylinder	Length	Pins	Keyway	Cam	Keyset	Finish
Complete Cylinder	50	K620	1-1/4"	6	XX	KC1	AA1	626
Housing Only	50	K660	1-1/4"	6	--	KC1	--	626
Core Only	50	K600	--	6	XX	--	AA1	626

Collar not furnished with cylinder ordered separately.

Mortise Lockset with a ACCENTRA KeyMark® SFIC Cylinder								
Quantity	Trim	Lock	Cylinder	Pins	Keyset	Hand	Thickness	Finish
50	AUR	8805FL	K620	6	AA1	RHR	1-3/4"	626

Collar - 1765 furnished standard when ordered with lockset. For Collar applications, see page 15.

How To Order With Construction Temporary Cores (See Page 17 For Construction Core Program)

Mortise Lockset with Temporary, Lockable SFIC							
Quantity	Trim	Lock	Cylinder	Key Code	Hand	Thickness	Finish
50	AUR	8805FL	K625	CT6SL	RHR	1-3/4"	626

For permanent core ordered separately, see "Core Only" above.

Mortise Lockset with Temporary, Disposable SFIC							
Quantity	Trim	Lock	Cylinder	Key Code	Hand	Thickness	Finish
50	AUR	8805FL	K625	CT6SD	RHR	1-3/4"	626

For permanent core ordered separately, see "Core Only" above.



Small Format Interchangeable Core (SFIC)



Mortise AUR 8805FL with K620 Cylinder

INTERCHANGEABLE CORE CYLINDERS

Large Format Rim

For use with exit devices and auxiliary locking devices.

Complete Cylinder	Core	Housing	Length	Pins		Tailpiece (TP)
				6	7	
K840	Included	Included	1-7/16"	X	--	KT1 Horizontal Break-off (For vertical application, change orientation of tailpiece)
			1-5/8"	--	X	
	K880		1-7/16"	X	--	
			1-5/8"	--	X	
	K800	--	--	X	X	
Schlage® LFIC	K890	--	--	X	NA	



**Complete Rim
Cylinder (LFIC)**


Housing Finish	Cylinder/Plug Finish
605, 606, 612, 613E	606
618, 619, 625, 626, WSP	626
BSP	BSP

LFIC Rim housings supplied in finish specified

How To Order Examples

Rim Cylinder Ordered Separately								
	Quantity	Cylinder	Length	Pins	Keyway	TP	Keyset	Finish
Complete Cylinder	50	K840	1-7/16"	6	XX	KT1	AA1	626
Housing Only	50	K880	1-7/16"	6	--	KT1	--	626
Core Only	50	K800	--	6	XX	--	AA1	626

Collar not furnished with cylinder ordered separately.

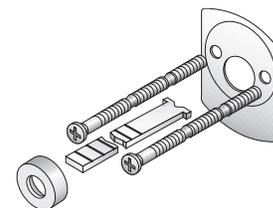

**Tailpiece and
Mounting Hardware**

Exit Device with a ACCENTRA KeyMark® LFIC Cylinder								
Quantity	Device	Trim	Cylinder	Pins	Keyway	Keyset	Hand	Finish
50	7150	626F	K840	6	XX	AA1	RHR	626

For Collar applications, see page 15.

How To Order With Construction Temporary Cores (See Page 17 For Construction Core Program)

Exit Device with Temporary LFIC						
Quantity	Device	Trim	Cylinder	Key Code	Hand	Finish
50	7150	626F	K845	CT6LL	RHR	626

For permanent core ordered separately, see "Core Only" above.

Rim Cylinder Separately with Temporary LFIC				
Quantity	Cylinder	Tailpiece	Key Code	Finish
50	K845	KT1	CT6LL	626

For permanent core ordered separately, see "Core Only" above.



**Heavy-Duty
Exit Device Trim 626F
with K840 Cylinder and
KP4 Collar**

INTERCHANGEABLE CORE CYLINDERS

Small Format Rim

Complete Cylinder	Core	Housing	Length	Pins		Tailpiece (TP)
				6	7	
K640	Included	Included	1-1/4"	X	--	KT1 Horizontal Break-off (For vertical application, change orientation of tailpiece.)
			1-3/8"	X	X	
--	--	K680	1-1/4"	X	--	
			1-3/8"	X	X	
--	K600	--	--	X	X	

For use with exit devices and auxiliary locking devices.



Complete Rim Cylinder (SFIC)

Housing Finish	Cylinder/Plug Finish
605, 606, 612, 613E	606
618, 619, 625, 626, WSP, BSP	626

SFIC Rim housings supplied in finish specified

How To Order Examples

Rim Cylinder Ordered Separately								
	Quantity	Cylinder	Length	Pins	Keyway	TP	Keyset	Finish
Complete Cylinder	50	K640	1-1/4"	6	XX	KT1	AA1	626
Housing Only	50	K680	1-1/4"	6	--	KT1	--	626
Core Only	50	K600	--	6	XX	--	AA1	626

Collar not furnished with cylinder ordered separately.

Exit Device with a ACCENTRA KeyMark® SFIC Cylinder								
Quantity	Device	Trim	Cylinder	Pins	Keyway	Keyset	Hand	Finish
50	7150	626F	K640	6	XX	AA1	RHR	626

For Collar applications, see page 15.

How To Order With Construction Temporary Cores (See Page 17 For Construction Core Program)

Exit Device with Temporary, Lockable SFIC						
Quantity	Device	Trim	Cylinder	Key Code	Hand	Finish
50	7150	626F	K645	CT6SL	RHR	626

For permanent core ordered separately, see "Core Only" above.

Rim Cylinder Separately with Temporary, Disposable SFIC				
Quantity	Cylinder	Tailpiece	Key Code	Finish
50	K645	KT1	CT6SD	626

For permanent core ordered separately, see "Core Only" above.



Heavy-Duty Exit Device Trim 626F with K640 Cylinder and KP4 Collar


AUXILIARY LOCKS/PADLOCKS

Bored Auxiliary Deadlocks

Cylinder	Used With	Pins		Tailpiece
		6	7	
K202	ACCENTRA 4800LN [^] Series	X	NA	KT8
K290	Schlage® "B"	X	NA	KT6

Note: For D series LFIC, refer to page 10 for K800 information.
Deadlock cylinders available in 606, 626, and BSP finishes only.
[^]Lockset series obsolete

For use with bored auxiliary deadlocks.

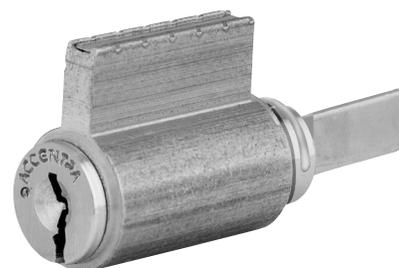

How To Order Examples

Cylinder Ordered Separately						
Quantity	Cylinder	Pins	Keyway	Tailpiece	Keypad	Finish
50	K202	6	XX	KT4	AA1	626

Padlocks

For use with ACCENTRA PD500 Series Large or Small Format Interchangeable Core padlocks.

How To Order Examples

Padlock with a Large Format ACCENTRA KeyMark® Core					
Quantity	Lock	Cylinder	Pins	Keyway	Keypad
50	PD524	K800	6	XX	AA1

For How To Order core only, refer to page 10.

Padlock with a Small Format ACCENTRA KeyMark® Core					
Quantity	Lock	Cylinder	Pins	Keyway	Keypad
50	PD515	K600	6	XX	AA1

For How To Order core only, refer to page 11.



COLLARS

1765 Collar Application Guide For Mortise Lock Standard "Sectional" And All Reflections® Trims

Cylinder		Door Thickness			
Type	Length	1-3/4"	2"	2-1/4"	2-1/2"
K100	1-1/8"	.312	.187	.062	*
K100	1-1/4"	.375	.281	.125	.062
K620/660					
K620	1-3/8"	.563	.469	.312	.187
K100	1-1/2"	.656	.563	.406	.281
K820/860					
K820/860	1-11/16"	.844	.750	.594	.500

* Indicates cylinder length not sufficient for door/escutcheon thickness; select a longer cylinder.



**1765
Solid Recessed**



**KP3
Wave Washer
(Furnished standard with 1765 collar.)**

1765 Collar Application Guide For Mortise Lock "Escutcheon" Trim

Cylinder		Camden				SL or Easton				Lenoir				Copenhagen			
Type	Length	Door Thickness				Door Thickness				Door Thickness				Door Thickness			
Type	Length	1-3/4"	2"	2-1/4"	2-1/2"	1-3/4"	2"	2-1/4"	2-1/2"	1-3/4"	2"	2-1/4" ^A	2-1/2"	1-3/4"	2"	2-1/4"	2-1/2"
K100	1-1/8"	NC	*	*	*	.125	KP4	*	*	.187	NC	NC	*	.187	.094	*	*
K100	1-1/4"	NC	NC	*	*	.156	.094	*	*	.281	.125	.062	NC	.344	.219	.094	*
K620/660																	
K620	1-3/8"	.125	NC ^A	NC ^A	*	.375	.250	.156	KP4	.469	.312	.187	.062	.469	.344	.250	KP4
K100	1-1/2"	.250	.125	*	NC	.500	.375	.250	.125	.563	.406	.312	.156	.594	.469	.375	.219
K820/860																	
K820/860	1-11/16"	.469	.344	.219	.062	.719	.563	.469	.312	.750	.594	.469	.375	.844	.656	.531	.406

*Indicates cylinder length not sufficient for door/escutcheon thickness, select a longer cylinder.

^ASingle cylinder only

NC=No Collar Required

Collar Application Guide For Exit Device Trim

Cylinder		Trim										
Type	Length	121NL	200	500/510	620/680	630	350/650	660/670				
Rim K300	1-1/8"	1765.250	1765.406	599.544	KP4	1765.250						
K640/680	1-1/4"											
K640/680	1-3/8"								1765.563	599.700	1765.187	1765.406
K840/880	1-7/16"								1765.719		1765.406	1765.500
K840/880	1-5/8"								1765.937	NA	1765.563	1765.719
Mortise/FC K100	1-1/2"					NC	KP4					
Mortise/LFIC K820/K860	1-1/2"					NC	KP4					
K820/K860	1-11/16"					KP4	1765.375					
Mortise/SFIC K620/K660	1-1/4"					NA	NA					
K620/K660	1-3/8"					NA	NC					
K620/K660	1-3/4"					KP4	1765.375					



**KP4
Flush Mount**

Collar sizes are based on 1-3/4" door thickness, for sizes other than those shown contact ACCENTRA technical support.

ACCESSORIES

Cams*

Number	Reference
KC1†	2160
KC2	2130
KC3	1161/Schlage® straight
KC4	1160
KC5	1161L (AR)
KC6	1161G (KeySwitch)
KC7	Schlage® cloverleaf
KC8	Corbin Russwin cloverleaf (A01)
KC9	Sargent® Straight




Tailpieces

Number	Used With	Remarks
KT1	K300/K840	Rim/LFIC Rim
KT2	K402	6-Pin KIL
KT3	K404	KIL
KT4	K200	Auxiliary
KT5	K490	Schlage® KIL Kit
KT6	K290	Schlage® Auxiliary
KT7	K402	7-Pin KIL
KT8	K202	6-Pin Interconnected Lock

†Furnished standard unless otherwise specified.

Cylinder Accessories*	
Number	Reference
KP1	Cam Washer
KP2	Screws

*Note: ACCENTRA KeyMark® cams and cylinder accessories are not interchangeable with other ACCENTRA cylinders.

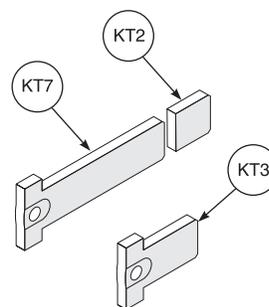


Service Tools

Pin Kit

Each pin kit has all the pins necessary to combine ACCENTRA KeyMark® FC, SFIC and LFIC cylinders.

How To Order

K918

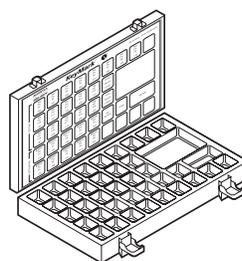

Tools & Fixtures	Number
Key Gauge/Decoder	K915



K915

CONSTRUCTION CORE PROGRAM

Construction Master Keying

For security reasons, ACCENTRA KeyMark® cylinders are not available construction master keyed. Temporary construction cores are available for both SFIC and LFIC. Temporary cores for SFIC are available with either disposable or locking cores. Temporary cores for LFIC are available with only lockable cores. Please note that temporary cores are not available in competitor formats.

When requesting locksets or cylinders with temporary cores where ACCENTRA KeyMark cores will be used for the permanent master key system, the proper ordering procedures must be followed to ensure the issuance of the correct cylinder collars and housings. For all Temporary Construction core orders, both the cylinder and key code designations must be specified. See this page and pages 9-13 for How to Order Examples.

Key Codes	Description
CT6LL	6-pin with large format lockable temporary core
CT6SL	6-pin with small format lockable temporary core
CT6SD	6-pin with small format disposable temporary core
CT7LL	7-pin with large format lockable temporary core
CT7SL	7-pin with small format lockable temporary core
CT7SD	7-pin with small format disposable temporary core

Large Format (LFIC)

1210/1220 cores are furnished when the following cylinder designations are used:

Cylinder	Description	Used With
1210	CT6LL	Cylindrical
1220	CT7LL	Cylindrical
K825	Complete Cylinder	Mortise
K845	Complete Cylinder	Rim

All locksets and cylinders ordered with large format interchangeable cores will be provided with keyed alike standard 1210 or 1220 temporary cores. Temporary operating and control keys are required and quantities should be specified. At the completion of the construction phase, these temporary cores can be returned. Refer to the current ACCENTRA price book for details. See pages 9-13 for additional examples.

How to Order Example:

Mortise Lockset to be Furnished with Temporary LFIC
For the above example, the customer would receive complete mortise locksets with ACCENTRA KeyMark K860-1-1/2" housings, 1765.594 collars and 6-pin 1210 keyed alike core. The ACCENTRA KeyMark permanent cores, K800, would be ordered separately.

Qty.	Trim	Lock	Cylinder	Key Code	Hand	Thickness	Finish
50	AUR	8805FL	K825	CT6LL	RHR	1-3/4"	626

Small Format (SFIC)

Small format temporary cores can be provided with two options: Disposable or Lockable.

Either disposable or K926 (6-pin lockable) cores are furnished when the following cylinder designations are used:

Cylinder	Description	Used With
K925	6/7-pin Disposable Thumb Turn Only	Cylindrical
K926	6/7-pin Lockable Core Only	Cylindrical
K625	Complete Cylinder	Mortise
K635	Complete Cylinder	Mortise-Tapered
K645	Complete Cylinder	Rim

Option 1: Disposable SFIC (K925)

All locksets and cylinders will be provided with disposable thumb-turn type cores. No keys are required. These cores are disposable and cannot be returned. See pages 11 and 13 for additional examples.

How to Order Example:

Mortise Lockset to be Furnished with Temporary, Disposable SFIC
For the above example, the customer would receive complete mortise locksets with ACCENTRA KeyMark K660 – 1-1/4" housings, 1765.375 collars and disposable thumb-turn cores, K925. The ACCENTRA KeyMark permanent cores, K600, would be ordered separately.

Qty.	Trim	Lock	Cylinder	Key Code	Hand	Thickness	Finish
50	AUR	8805FL	K625	CT6SD	RHR	1-3/4"	626

Option 2: Lockable SFIC (K926)

All locksets and cylinders will be provided with keyed alike standard SFIC cores that are unrelated to the permanent master key system. Temporary operating and control keys are required, quantities must be specified. At the completion of the construction phase, these temporary cores can be returned. See pages 11 and 13 for additional examples.

How to Order Example:

Exit Device to be Furnished with Temporary, Lockable SFIC
For the above example, the customer would receive complete exit devices and trim with ACCENTRA KeyMark K680 housings, KP4 collars and temporary locking SFIC cores, K926. The ACCENTRA KeyMark permanent cores, K600, would be ordered separately.

Qty.	Device	Trim	Cylinder	Key Code	Hand	Finish
50	7150	626F	K645	CT6SL	RHR	626

How To Order

Systems requiring SFIC temporary cores must be ordered either completely with disposable, or lockable cores. Locksets and /or cylinder on a particular purchase order may not be mixed with SFIC temporary core types.

Lockable SFIC cores, K926, and disposable SFIC cores, K925, may be purchased separately.

The ASSA ABLOY Group is the global leader in access solutions.
Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

ACCENTRA
ASSA ABLOY

TECHNICAL SUPPORT

(troubleshooting, product use and application, returns)

Tel: 855-557-5078

Email: techsupport.accentra@assaabloy.com

CUSTOMER SUPPORT

(orders, product configuration, pricing, lead-time)

Tel: 855-557-5078 x2

Email: Customerservice.Accentra@assaabloy.com

U.S.A.:

ASSA ABLOY ACCENTRA™

225 Episcopal Road
Berlin, CT 06037-4004

Tel: 1-800-438-1951

Fax: 1-800-338-0965

www.accentra-assaabloy.com

Canada:

ASSA ABLOY Door Security Solutions Canada

160 Four Valley Drive
Vaughan, Ontario L4K 4T9

Tel: 1-800-461-3007

Fax: 1-800-461-8989

assaabloydss.ca

International:

ASSA ABLOY Americas International

Tel: 1-905-821-7775

Fax: 1-905-821-1429

assaabloyai.com