INSTALLATION

HERFORD CONTR A DORMA Group Company

AH10F / AH20F



For 8310 / 8320 Electromagnetic Locks

In or Out... we make it Easy!°

Instructions

Read the Pre-Installation instructions provided with your RCI Electromagnetic Lock. Conformance is important.

This accessory provides secure surface mounting when it is not possible to secure the armature mounting bolt through the door.

Each armature holder is fastened to the door frame with the 8 TEK[™] screws provided.


The armature bolt is positioned through the plate and 3 washers.

CONTROLS

Thread locking compound is carefully applied to the exposed thread.

The bolt then threads into the armature holder.

NOTE: The 3/8" (9.5mm) thickness of the armature plate holder must be considered when drilling the frame head to mount the electromagnetic lock

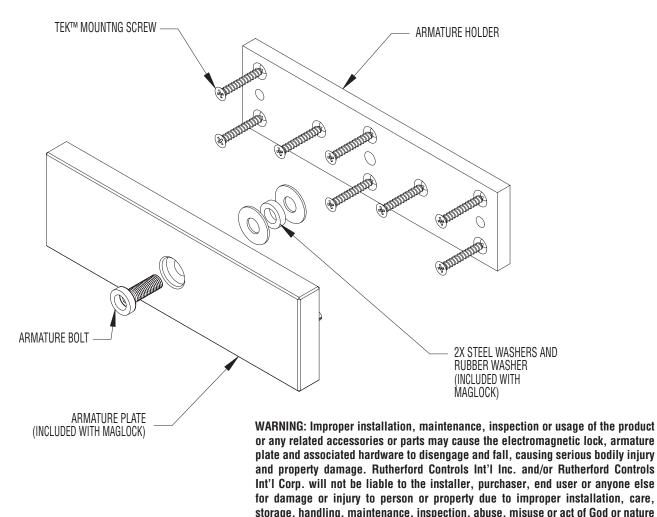

NOTE: Not to scale. Specifications are subject to change without notice.

involving this product or any related accessories or parts.