

The industry's most advanced keypad... no strings attached

TRI BRID
TECHNOLOGY

Stand-Alone, Wiegand & Optional Wireless at a 'Stand-Alone' Price!

Camden's CM-120 Series Keypads are unlike any others you've installed before. Imagine one keypad for any door control project, stand alone or as part of your access control system, with the option to control doors wirelessly! CM-120 Series keypads also offer a complete range of advanced features, including '*' or '#' code number confirmation, global lockout and latch modes. Best of all, these industry-leading keypads are competitively priced against most stand-alone keypads!

- Indoor / back-lit, weather and vandal resistant models with optional 2 channel plug-in wireless transmitter for control of additional doors or gates
- Fully wireless, battery operated model
- 999 users with 10 million variable length codes
- (2) 3 Amp. Form 'C' relays with independent control
- REX and door contact inputs



Control up
to 6 relay outputs
with 1 keypad!

Camden
DOOR CONTROLS

DISCOVER THE BEST IN DOOR ACTIVATING AND LOCKING PRODUCTS!


TOLL FREE: 1.877.226.3369 • Tel: 905.366.3377 • Fax: 905.366.3378
info@camdencontrols.com • www.camdencontrols.com/keypads

Scan Me!




Indoor and Outdoor Digital Keypads


SPECIFICATIONS	
Size	2 3/4" W x 4 1/2" L x 3/4" D (70mm x 114mm x 19mm)
Mounting	2 x #6-32 machine screws
Temperature	-40° F to +185° F (-40° to +85°C)
Operating Voltage	12/24 V AC/DC
Current Draw	30 mA standby, 90 mA max.
Capacity	999 user codes
Length	Variable or fixed, up to 8 digits (10 million possible codes)
Response Time	0.3 seconds
Inputs	1 x REX input 1 x Door contact input
Wired Relay Outputs	2 x Form C (SPDT) Use of wiegand output, disables wireless transmitter, and wired relay outputs
RF Output	Optional plug-in transmitter 2 channel
Wiegand Output	26 bit with programmable facility code
Relay Contact Rating	3 Amps. @ 24 VDC
Time Delays	1 to 255 seconds, or latched

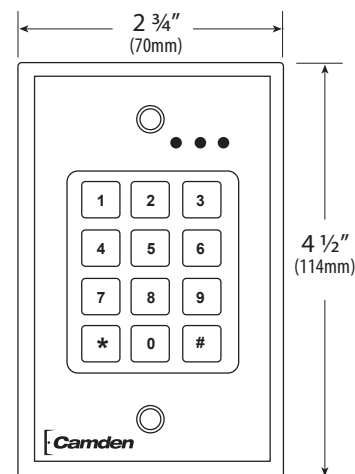

FRONT
CM-120

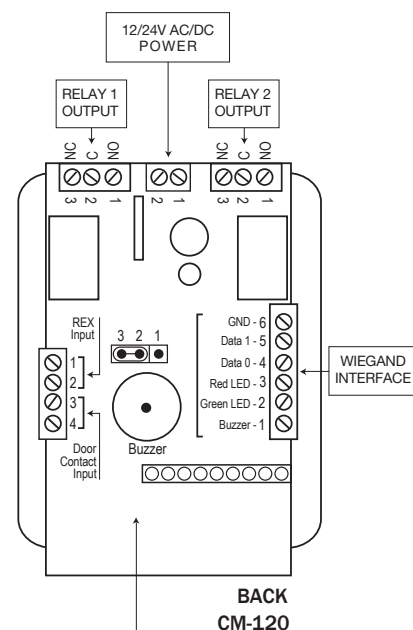

BACK
CM-120

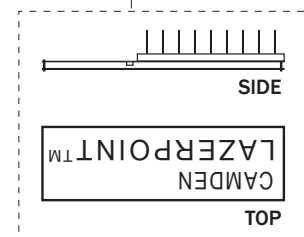

CM-TX 99
TRANSMITTER

ORDERING INFORMATION	
Model	Description
CM-120i	Digital keypad, indoor
CM-120wV2	Weather and vandal resistant illuminated keypad, indoor/outdoor
CM-TX-99	915Mhz Lazerpoint™, wireless transmitter, 2 channel
CM-RX-91	915Mhz Lazerpoint™, 1 relay wireless receiver, 12/24V AC/DC
CM-RX-92	915Mhz Lazerpoint™, 2 relay wireless receiver, 12/24V AC/DC